

तंरगपथकों के लिये फ्लैंज

भाग 4 गोलाकार (चक्रवरदार) तंरगपथक फ्लैंज

के लिए संबंधित विशिष्टि

Flanges for Waveguides

**Part 4 Relevant Specifications for
Flanges for Circular Waveguides**

ICS 33.120.10

© BIS 2023
© IEC 2017



भारतीय मानक ब्यूरो

BUREAU OF INDIAN STANDARDS
मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI - 110002
www.bis.gov.in www.standardsbis.in

NATIONAL FOREWORD

This Indian Standard (Part 4) which is identical with IEC 60154-4 : 2017 Flanges for waveguides — Part 4: Relevant specifications for flanges for circular waveguides' issued by the International Electrotechnical Commission (IEC) was adopted by the Bureau of Indian Standards on recommendation of the Wires, Cables, Waveguides and Accessories Sectional Committee and approval of the Electronics and Information Technology Division Council.

IS 10738 (Part 4/Sec 1) : 1991 was published in 1991 and assistance were derived from IEC Pub 154-4 : 1969. Another Standard IS 10738 (Part 4/Sec 2) : 1992 was published in 1992 and assistance were derived from IEC Pub 154-4 : 1969. This superseding is being done to align it with the latest version of IEC 60154-4 : 2016. On publication of this Standard, IS 10738 (Part 4/Sec 1) : 1991 and IS 10738 (Part 4/Sec 2) : 1991 stands withdrawn.

The text of IEC Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain terminologies and conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'
- Comma (,) has been used as a decimal marker, while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards which are to be substituted in their respective places are listed below along with their degree of equivalence for the editions indicated:

<i>International Standards</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
IEC 60154-1 : 2016 Flanges for waveguides — General requirements	IS/IEC 60154-1 : 2016 Flanges for waveguides — General requirements	Identical

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 2022 'Rules for rounding off numerical values (second revision)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

CONTENTS

1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General	1
4.1 Standardized types	1
4.2 Type designation	1
5 Mechanical requirements	2
5.1 General requirements both for assemblies and for unmounted flanges	2
5.1.1 Materials	2
5.1.2 Locating holes	2
5.1.3 Shank diameter of fixing bolts used for location	2
5.1.4 Relation between shank and locating hole diameters	2
5.1.5 Over-all dimensions and thickness of flanges	2
5.1.6 Surface roughness of contact area of contact flanges	2
5.1.7 Flatness of contact area	2
5.2 General requirements for assemblies	3
5.2.1 Positioning of the holes	3
5.2.2 Perpendicularity of the contact area	3
5.3 Additional requirements for unmounted flanges	3
5.3.1 General	3
5.3.2 Shape of aperture	3
5.3.3 Positioning of the holes	3
5.3.4 Ordering information	3
Annex A (normative) Dimensions of flanges for preferred waveguide sizes	4
Annex B (normative) Dimensions of flanges for both intermediate and preferred waveguide sizes	6
Bibliography	13
 Figure B.1 – Flanges for waveguide size C 18 up to C 28.7	7
Figure B.2 – Flanges for waveguide size C 30 up to C 46.2	8
Figure B.3 – TYPE F Flange for waveguide sizes C580 up to C 29000	10
Figure B.4 – TYPE G Flange for waveguide sizes C580 up to C 29000	12
 Table 1 – Flatness of contact area	3
Table A.1 – Dimensions of pressurizable type J flanges for circular waveguides (preferred sizes)	5
Table B.1 – Dimensions of pressurizable type J flanges for circular waveguides (preferred and intermediate sizes)	9

Indian Standard

FLANGES FOR WAVEGUIDES

PART 4 RELEVANT SPECIFICATIONS FOR FLANGES FOR CIRCULAR WAVEGUIDES

1 Scope

This part of IEC 60154-4 specifies the dimensions of flanges for circular waveguides for use in electronic equipment.

It covers requirements for flanges drilled before or after mounting on waveguides.

The aim of this document is to specify for waveguide flanges the mechanical requirements necessary to ensure compatibility and, as far as practicable, interchangeability as well as to ensure adequate electrical performance.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60154-1:2016, *Flanges for waveguides – General requirements*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 General

4.1 Standardized types

The series of flanges for circular waveguides covered by this document is shown in Figures B.1 to B.4.

Dimensions of flanges for preferred waveguide sizes are given in Table A.1.

Dimensions of flanges for both intermediate and preferred waveguide sizes are given in Table B.1.

4.2 Type designation

For the standardized types of flanges, the type designation comprises:

- the code: 60154 IEC;

- a dash;
- a letter relating to the basic construction of the flange, viz.:
 - P = pressurizable
 - U = unpressurizable
- a letter for the type according to the drawing;
- the letter and number of the waveguide for which the flange is designed.

EXAMPLE 60154 IEC – PJC 18 denotes a pressurizable type flange for circular waveguide 60153 IEC – C 18.

5 Mechanical requirements

5.1 General requirements both for assemblies and for unmounted flanges

5.1.1 Materials

It should be noted that no recommendations are made for the materials to be used for flanges for waveguides. The choice of material shall be agreed on between customer and manufacturer.

The cross-section of the circlip shown in Figures B.1. to B.4 is given for information only. The actual cross-section may assume any shape that does not adversely affect the mating of the flanges.

5.1.2 Locating holes

Not applicable, because location is not effected by bolts and holes.

5.1.3 Shank diameter of fixing bolts used for location

Not applicable, because location is not effected by bolts and holes.

5.1.4 Relation between shank and locating hole diameters

Not applicable, because location is not effected by bolts and holes.

5.1.5 Over-all dimensions and thickness of flanges

The over-all dimensions and thickness of flanges shall conform to the requirements specified in IEC 60154-1.

5.1.6 Surface roughness of contact area of contact flanges

The surface roughness of contact area of contact flanges shall conform to the requirements specified in IEC 60154-1.

5.1.7 Flatness of contact area

The flatness of contact area shall be better than the values given in Table 1.

Table 1 – Flatness of contact area

Range of Type C waveguide size	Requirements
	mm
C 14 and larger dimensions	For subsequent study
C 16 to C 28.7	0,03
C 30 to C 53.9	0,02
C 56 to X 136	0,01
C 140 and smaller dimensions	For further study

5.2 General requirements for assemblies

5.2.1 Positioning of the holes

Positioning of the holes shall be as shown in Figures B.1 to B.4 and in Tables 1, A.1 and B.1.

5.2.2 Perpendicularity of the contact area

As specified in IEC 60154-1, the perpendicularity of the contact area of the flange to the axis of the waveguide shall be $90^\circ \pm 1/4^\circ$.

5.3 Additional requirements for unmounted flanges

5.3.1 General

Figures B.1 to B.4 are for mounted flanges. In the individual drawings, the through type mounting of flanges to the waveguide is shown by way of example. This, however, does not exclude another method of mounting if the actual dimensions allow this.

It should be noted that for optimum electrical performance, post-drilling of the alignment holes after mounting is recommended.

5.3.2 Shape of aperture

The shape of aperture shall conform to the requirements specified in IEC 60154-1.

5.3.3 Positioning of the holes

Positioning of the holes shall be as shown in Figures B.1 to B.4 and in Tables 1, A.1 and B.1.

5.3.4 Ordering information

When ordering unmounted flanges, an allowance should be made on certain of the specified dimensions to cover the effects of possible machining after mounting.

Annex A (normative)

Dimensions of flanges for preferred waveguide sizes

The values given in Table A.1 are the basic (nominal) values of the outside cross-section of the waveguide according to IEC 60153 (all parts), and should be regarded as nominal values for the aperture according to IEC 60154-1:2016, 5.2.2, and they apply to unmounted flanges only.

When the outside D1 of circular waveguide sizes C 18, C 22, and C 25 are standardized, it may be necessary to modify some dimensions of these flanges to ensure compatibility with the waveguide.

The outer diameters D1 for waveguide sizes C 30 to C 89 were increased some time after the major dimensions in this document were approved and the gasket grooves may, in some cases, cut into the waveguide wall. It will be necessary in such cases to machine the gasket groove after assembly. Alternatively, a socket type flange could be used.

Each flange is comprised of a castellated ring and a part which is fixed to the waveguide. For this series of flanges, location depends on the fit between each castellated ring and both fixed parts. The diameter of the fixed part is called "shaft" in the table and the diameter of the castellated ring aperture is called "hole". The fit between these dimensions is ISO F7/h7 for sizes C 18 up to C 140.

Example: Flange 60154 IEC – PJC 18

- The maximum shaft diameter is 133,00 mm.
- The minimum shaft diameter is 132,960 mm.
- The maximum hole diameter is 133,083 mm.
- The minimum hole diameter is 133,043 mm.

The actual position of any hole shall be within a tolerance zone diameter ϕ of 0,4 mm, concentric to the theoretical position of the hole.

The symbol \odot indicates the maximum eccentricity of the flange dimension C with respect to the waveguides inside cross-section dimension D (see IEC 60153-4).

The figures given in Table A.1, which are given for information only, are calculated maximum values of the axial offset resulting from the most unfavourable combinations of deviations and eccentricities.

**Table A.1 – Dimensions of pressurizable type J flanges
for circular waveguides (preferred sizes)**

Dimensions in millimetres																				
Type designation of waveguide flange		To be used with waveguide 153 IEC	Figure	D1	P			X	B			C								
					Basic	Deviation			Basic	Deviation		Basic	Shaft deviation		Hole deviation		E	◎	Offset of axis	
						Upper	Lower			Upper	Lower		Upper	Lower	Upper	Lower				
154-PJC	18	C 18	B.1	For subsequent study	158,0	+0,5	-0,5		126,0	+0,2	-0,2	133,0	0	-0,04	+0,083	+0,043	144,0	0,05	0,22	
	22	C 22	B.1		141,0	+0,5	-0,5		109,0	+0,2	-0,2	116,0	0	-0,035	+0,071	+0,036	127,0	0,05	0,21	
	25	C 25	B.1		127,0	+0,5	-0,5		95,0	+0,2	-0,2	102,0	0	-0,035	+0,071	+0,036	113,0	0,05	0,21	
	30	C 30	B.2		78,029	114,0	+0,4	-0,4	82,0	+0,2	-0,2	90,0	0	-0,035	+0,071	+0,036	100,5	0,05	0,21	
	35	C 35	B.2		67,64	103,0	+0,4	-0,4	71,0	+0,2	-0,2	78,0	0	-0,03	+0,060	+0,030	89,0	0,05	0,19	
	40	C 40	B.2		57,074	94,0	+0,4	-0,4	62,0	+0,2	-0,2	69,0	0	-0,03	+0,060	+0,030	80,0	0,05	0,19	
	48	C 48	B.3		49,53	87,0	+0,4	-0,4	55,0	+0,2	-0,2	62,0	0	-0,03	+0,060	+0,030	73,0	0,05	0,19	
	56	C 56	B.3		42,164	81,0	+0,4	-0,4	49,0	+0,2	-0,2	56,0	0	-0,03	+0,060	+0,030	67,0	0,05	0,19	
	65	C 65	B.3		36,601	75,0	+0,4	-0,4	43,0	+0,2	-0,2	50,0	0	-0,025	+0,050	+0,025	61,0	0,05	0,17	
	76	C 76	B.4		31,09	69,0	+0,4	-0,4	37,0	+0,2	-0,2	44,0	0	-0,025	+0,050	+0,025	55,0	0,05	0,17	
	89	C 89	B.4		27,127	65,0	+0,4	-0,4	33,0	+0,2	-0,2	40,0	0	-0,025	+0,050	+0,025	51,0	0,05	0,17	
	104	C 104	B.4		22,784	62,0	+0,4	-0,4	30,0	+0,2	-0,2	37,0	0	-0,025	+0,050	+0,025	48,0	0,05	0,17	
	120	C 120	B.4		20,015	59,0	+0,4	-0,4	27,0	+0,2	-0,2	34,0	0	-0,025	+0,050	+0,025	45,0	0,04	0,15	
	140	C 140	B.4		17,12	56,0	+0,4	-0,4	24,0	+0,2	-0,2	31,0	0	-0,025	+0,050	+0,025	42,0	0,04	0,15	

Note The footnotes for this table are contained in Annex A.

Annex B (normative)

Dimensions of flanges for both intermediate and preferred waveguide sizes

The designations given for the preferred sizes were rounded off before the intermediate sizes were given their designations. This accounts for the small step which occasionally occurs between a preferred size designation and an adjacent intermediate size designation.

These values are the basic (nominal) values of the outside cross-section of the waveguide according to IEC 60153 (all parts) and should be regarded as nominal values for the aperture according to IEC 60154-1:2016, 5.2.2, and they apply to un mounted flanges only.

When the outside diameters D1 for preferred waveguide sizes C 18, C 22, C 25 and the intermediate sizes in Table B.1 are standardized, it may be necessary to modify certain dimensions of these flanges to ensure compatibility with the waveguide.

The outer diameters D1 for waveguide sizes C 30 to C 89 were increased some time after the major dimensions in this document were approved and the gasket grooves may, in some cases, cut into the waveguide wall. It will be necessary in such cases to machine the gasket groove after assembly. Alternatively, a socket type flange could be used.

Each flange is comprised of a castellated ring and a part which is fixed to the waveguide. For this series of flanges, location depends on the fit between each castellated ring and both fixed parts. The diameter of the fixed part is called "shaft" in the table and the diameter of the castellated ring aperture is called "hole". The fit between these dimensions is ISO f7/h7 for sizes C 18 up to C 140.

Example: Flange 60154 IEC – PJC 18


- The maximum shaft diameter is 133,00 mm.
- The minimum shaft diameter is 132,960 mm.
- The maximum hole diameter is 133,083 mm.
- The minimum hole diameter is 133,043 mm.

The actual position of any hole shall be within a tolerance zone diameter ϕ of 0,4 mm (or 0,016 in), concentric to the theoretical position of the hole.

The symbol \odot indicates the maximum eccentricity of the flange dimension C with respect to the waveguide inside cross-section dimension D in IEC 60153-4.

These figures, which are given for information only, are calculated maximum values of the axial offset resulting from the most unfavourable combinations of deviations and eccentricities.

Dimensions in millimetres (Dimensions in inches)


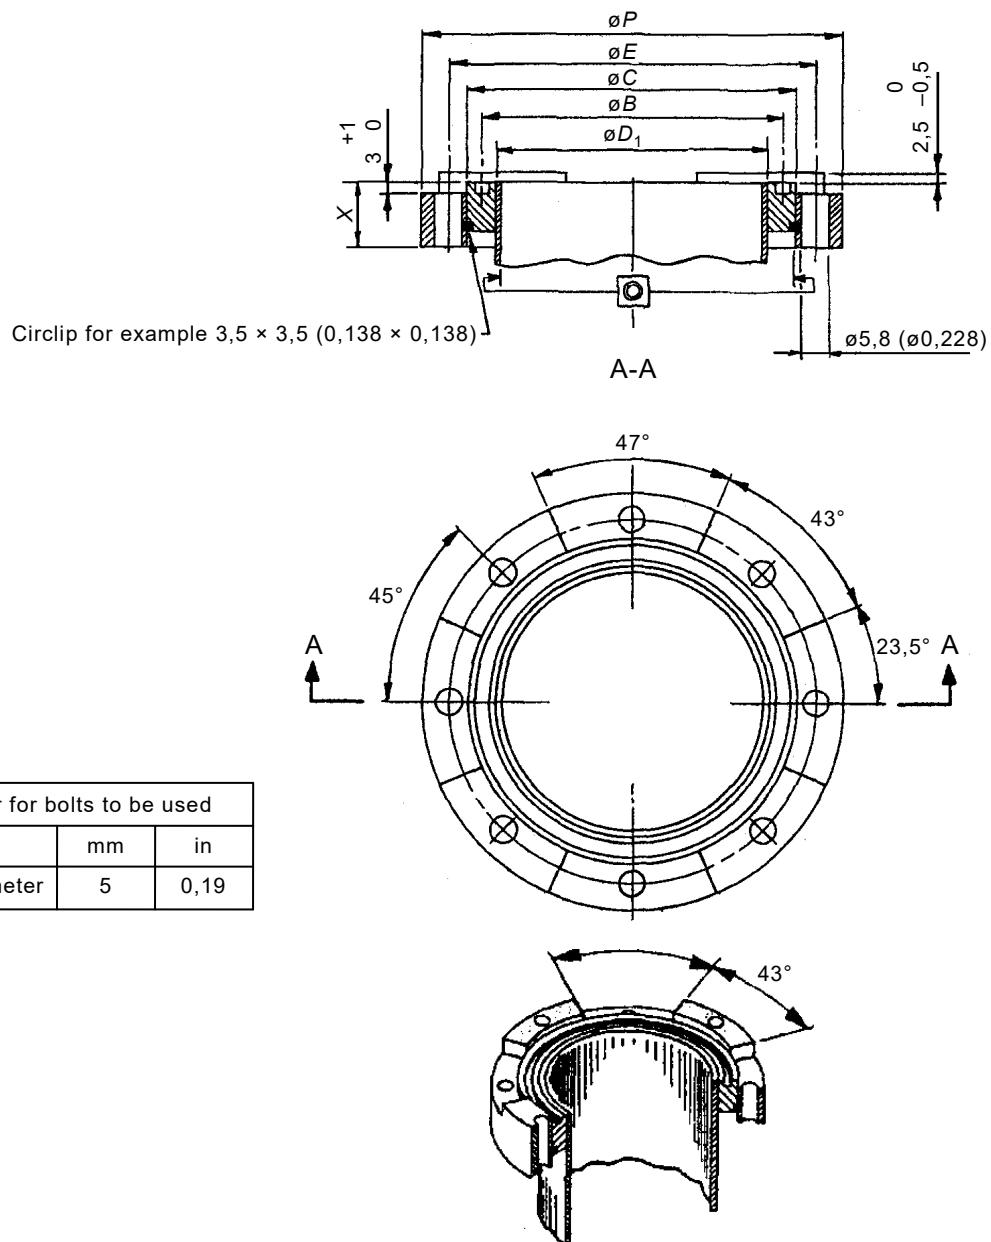


This drawing shows the maximum angles between radii which bound the projecting teeth. Different shapes are also permitted provided that the projecting teeth do not extend beyond the angular dimensions given.


IEC

Figure B.1 – Flanges for waveguide size C 18 up to C 28.7

Dimensions in millimetres (Dimensions in inches)

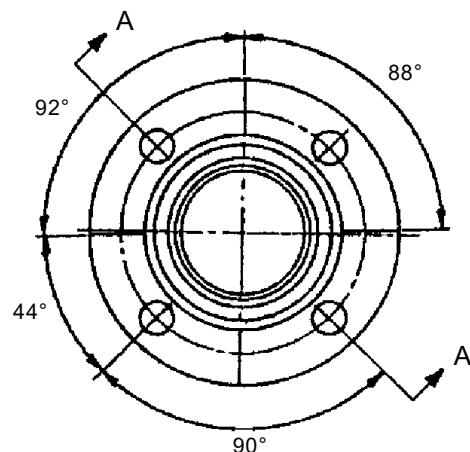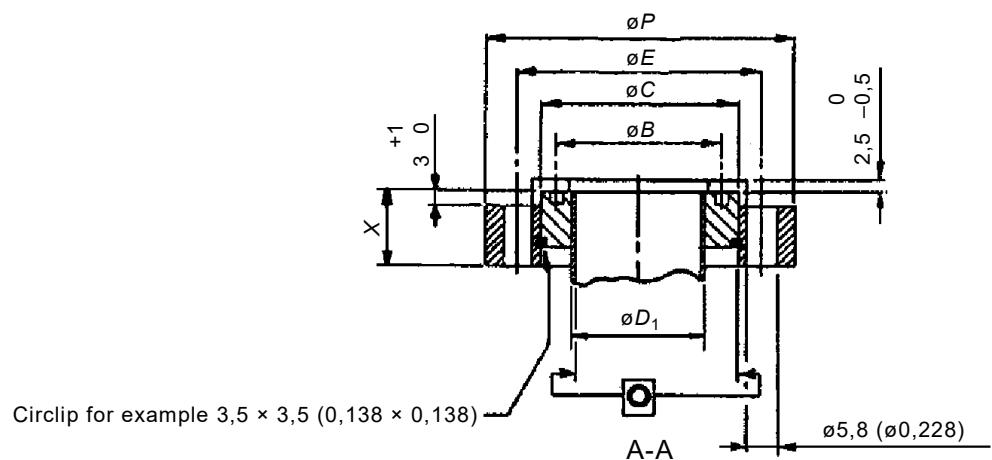

Diameter for bolts to be used		
	mm	in
Shank diameter	5	0,19

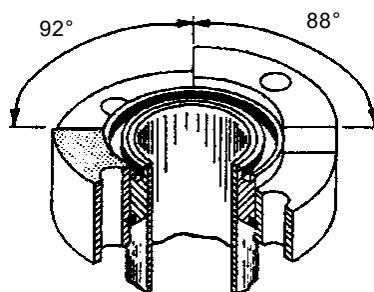

This drawing shows the maximum angles between radii which bound the projecting teeth. Different shapes are also permitted provided that the projecting teeth do not extend beyond the angular dimensions given.

IEC

Figure B.2 – Flanges for waveguide size C 30 up to C 46.2


Table B.1 – Dimensions of pressurizable type J flanges for circular waveguides (preferred and intermediate sizes)

Type designation of waveguide flange		To be used with waveguide IEC 153 IEC	Figure	D1	Dimensions in millimetres																
					P			X	B			Basic	C			E	◎	Offset of axis			
					Basic	Deviation			Upper	Lower	Basic	Deviation		Basic	Shaft deviation		Upper	Lower			
						Upper	Lower					Upper	Lower								
	18	C 18	1	For subsequent study	158,0	+0,5	-0,5		126,0	+0,2	-0,2	133,0	0,000	-0,04	+0,083	+0,043	144	0,05	0,22		
	19,4	C 19,4	1		153,0	+0,5	-0,5		121,0	+0,2	-0,2	128,0	0,000	-0,04	+0,083	+0,043	139	0,05	0,22		
	20,1	C 20,1	1		149,0	+0,5	-0,5		117,0	+0,2	-0,2	124,0	0,000	-0,04	+0,083	+0,043	135	0,05	0,22		
	20,9	C 20,9	1		145,0	+0,5	-0,5		113,0	+0,2	-0,2	120,0	0,000	-0,35	+0,071	+0,036	131	0,05	0,21		
	22	C 22	1		141,0	+0,5	-0,5		109,0	+0,2	-0,2	116,0	0,000	-0,35	+0,071	+0,036	127	0,05	0,21		
	22,7	C 22,7	1		137,0	+0,5	-0,5		105,0	+0,2	-0,2	112,0	0,000	-0,35	+0,071	+0,036	123	0,05	0,21		
	23,6	C 23,6	1		134,0	+0,5	-0,5		102,0	+0,2	-0,2	109,0	0,000	-0,35	+0,071	+0,036	120	0,05	0,21		
	24,5	C 24,5	1		130,0	+0,5	-0,5		98,0	+0,2	-0,2	105,0	0,000	-0,35	+0,071	+0,036	116	0,05	0,21		
	25	C 25	1		127,0	+0,5	-0,5		95,0	+0,2	-0,2	102,0	0,000	-0,35	+0,071	+0,036	113	0,05	0,21		
	26,6	C 26,6	1		124,0	+0,5	-0,5		92,0	+0,2	-0,2	99,0	0,000	-0,35	+0,071	+0,036	110	0,05	0,21		
	27,7	C 27,7	1		121,0	+0,5	-0,5		89,0	+0,2	-0,2	96,0	0,000	-0,35	+0,071	+0,036	107	0,05	0,21		
	28,7	C 28,7	1		118,0	+0,4	-0,4		86,0	+0,2	-0,2	93,0	0,000	-0,35	+0,071	+0,036	104	0,05	0,21		
	30	C 30	2	78,03	114,0	+0,4	-0,4		82,0	+0,2	-0,2	90,0	0,000	-0,35	+0,071	+0,036	100,5	0,05	0,21		
	31,1	C 31,1	2	**	111,0	+0,4	-0,4		79,0	+0,2	-0,2	86,0	0,000	-0,35	+0,071	+0,036	97	0,05	0,21		
	32,3	C 32,3	2	**	108,0	+0,4	-0,4		76,0	+0,2	-0,2	83,0	0,000	-0,35	+0,071	+0,036	94	0,05	0,21		
	33,7	C 33,7	2	**	106,0	+0,4	-0,4		74,0	+0,2	-0,2	81,0	0,000	-0,35	+0,071	+0,036	92	0,05	0,21		
	35	C 35	2	67,64	103,0	+0,4	-0,4		71,0	+0,2	-0,2	78,0	0,000	-0,03	+0,060	+0,030	89	0,05	0,19		
	36,4	C 36,4	2	**	101,0	+0,4	-0,4		69,0	+0,2	-0,2	76,0	0,000	-0,03	+0,060	+0,030	87	0,05	0,19		
	37,8	C 37,8	2	**	99,0	+0,4	-0,4		67,0	+0,2	-0,2	74,0	0,000	-0,03	+0,060	+0,030	85	0,05	0,19		
	39,4	C 39,4	2	**	97,0	+0,4	-0,4		65,0	+0,2	-0,2	72,0	0,000	-0,03	+0,060	+0,030	83	0,05	0,19		
	40	C 40	2	57,07	94,0	+0,4	-0,4		62,0	+0,2	-0,2	69,0	0,000	-0,03	+0,060	+0,030	80	0,05	0,19		
	42,7	C 42,7	2	**	92,0	+0,4	-0,4		60,0	+0,2	-0,2	67,0	0,000	-0,03	+0,060	+0,030	78	0,05	0,19		
	44,4	C 44,4	2	**	91,0	+0,4	-0,4		59,0	+0,2	-0,2	66,0	0,000	-0,03	+0,060	+0,030	77	0,05	0,19		
	46,2	C 46,2	2	**	89,0	+0,4	-0,4		57,0	+0,2	-0,2	64,0	0,000	-0,03	+0,060	+0,030	75	0,05	0,19		
154-PJC	48	C 48	3	49,53	87,0	+0,4	-0,4		55,0	+0,2	-0,2	62,0	0,000	-0,03	+0,060	+0,030	73	0,05	0,19		
	49,9	C 49,9	3	**	85,0	+0,4	-0,4		53,0	+0,2	-0,2	60,0	0,000	-0,03	+0,060	+0,030	71	0,05	0,19		
	51,8	C 51,8	3	**	84,0	+0,4	-0,4		52,0	+0,2	-0,2	59,0	0,000	-0,03	+0,060	+0,030	70	0,05	0,19		
	53,9	C 53,9	3	**	82,0	+0,4	-0,4		50,0	+0,2	-0,2	57,0	0,000	-0,03	+0,060	+0,030	68	0,05	0,19		
	56	C 56	3	42,16	81,0	+0,4	-0,4		49,0	+0,2	-0,2	56,0	0,000	-0,03	+0,060	+0,030	67	0,05	0,19		
	58,3	C 58,3	3	**	79,0	+0,4	-0,4		47,0	+0,2	-0,2	54,0	0,000	-0,03	+0,060	+0,030	65	0,05	0,19		
	60,6	C 60,6	3	**	78,0	+0,4	-0,4		46,0	+0,2	-0,2	53,0	0,000	-0,03	+0,060	+0,030	64	0,05	0,19		
	63,2	C 63,2	3	**	76,0	+0,4	-0,4		44,0	+0,2	-0,2	51,0	0,000	-0,03	+0,060	+0,030	62	0,05	0,19		
	65	C 65	3	36,6	75,0	+0,4	-0,4		43,0	+0,2	-0,2	50,0	0,000	-0,025	+0,050	+0,025	61	0,05	0,17		
	68,2	C 68,2	3	**	74,0	+0,4	-0,4		42,0	+0,2	-0,2	49,0	0,000	-0,025	+0,050	+0,025	60	0,05	0,17		
	70,9	C 70,9	3	**	73,0	+0,4	-0,4		41,0	+0,2	-0,2	48,0	0,000	-0,025	+0,050	+0,025	59	0,05	0,17		
	73,9	C 73,9	3	**	71,0	+0,4	-0,4		39,0	+0,2	-0,2	46,0	0,000	-0,025	+0,050	+0,025	67	0,05	0,17		
	76	C 76	4	31,09	69,0	+0,4	-0,4		37,0	+0,2	-0,2	44,0	0,000	-0,025	+0,050	+0,025	55	0,05	0,17		
	80	C 80	4	**	68,0	+0,4	-0,4		36,0	+0,2	-0,2	43,0	0,000	-0,025	+0,050	+0,025	54	0,05	0,17		
	83,1	C 83,1	4	**	67,0	+0,4	-0,4		35,0	+0,2	-0,2	42,0	0,000	-0,025	+0,050	+0,025	53	0,05	0,17		
	86,1	C 86,1	4	**	66,0	+0,4	-0,4		34,0	+0,2	-0,2	41,0	0,000	-0,025	+0,050	+0,025	52	0,05	0,17		
	89	C 89	4	27 127	65,0	+0,4	-0,4		33,0	+0,2	-0,2	40,0	0,000	-0,025	+0,050	+0,025	51	0,05	0,17		
	93,2	C 93,2	4	**	34,0	+0,4	-0,4		32,0	+0,2	-0,2	39,0	0,000	-0,025	+0,050	+0,025	50	0,05	0,17		
	97	C 97	4	**	63,0	+0,4	-0,4		31,0	+0,2	-0,2	38,0	0,000	-0,025	+0,050	+0,025	49	0,05	0,17		
	101	C 101	4	**	62,5	+0,4	-0,4		30,5,0	+0,2	-0,2	37,5,0	0,000	-0,025	+0,050	+0,025	48,5	0,05	0,17		
	104	C 104	4	22 784	62,0	+0,4	-0,4		30,0	+0,2	-0,2	37,0	0,000	-0,025	+0,050	+0,025	48	0,05	0,17		
	109	C 109	4	**	61,0	+0,4	-0,4		29,0	+0,2	-0,2	36,0	0,000	-0,025	+0,050	+0,025	47	0,05	0,17		
	114	C 114	4	**	60,0	+0,4	-0,4		28,0	+0,2	-0,2	35,0	0,000	-0,025	+0,050	+0,025	46	0,05	0,17		
	118	C 118	4	**	59,5	+0,4	-0,4		27,5	+0,2	-0,2	34,5	0,000	-0,025	+0,050	+0,025	45,5	0,05	0,17		
	120	C 120	4	20 015	59,0	+0,4	-0,4		27,0	+0,2	-0,2	34,0	0,000	-0,025	+0,050	+0,025	45	0,04	0,15		
	127	C 127	4	**	58,0	+0,4	-0,4		26,0	+0,2	-0,2	33,0	0,000	-0,025	+0,050	+0,025	44	0,04	0,15		
	129	C 129	4	**	57,5	+0,4	-0,4		25,5	+0,2	-0,2	32,5,0	0,000	-0,025	+0,050	+0,025	43,5	0,04	0,15		
	136	C 136	4	**	57,0	+0,4	-0,4		25,0	+0,2	-0,2	32,0	0,000	-0,025	+0,050	+0,025	43	0,04	0,15		
	140	C 140	4	17,12	56,0	+0,4	-0,4		24,0	+0,2	-0,2	31,0	0,000	-0,025	+0,050	+0,025	42	0,04	0,15		

Note The footnotes for this table are contained in Annex B.


** For subsequent study.

Dimensions in millimetres

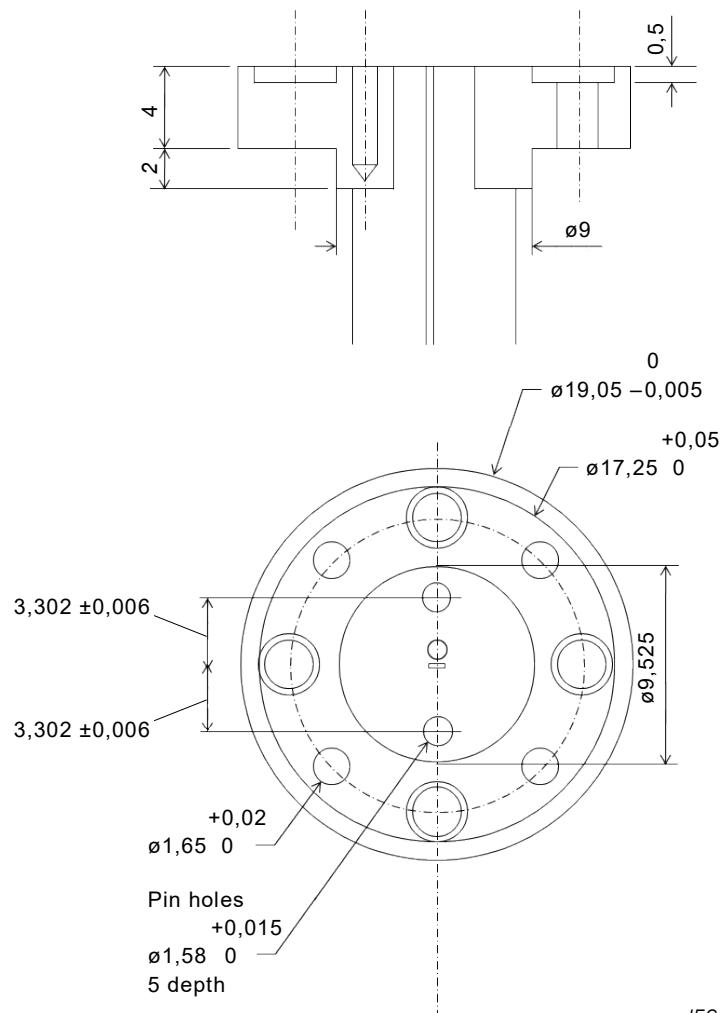

Flange


Dimensions in millimetres

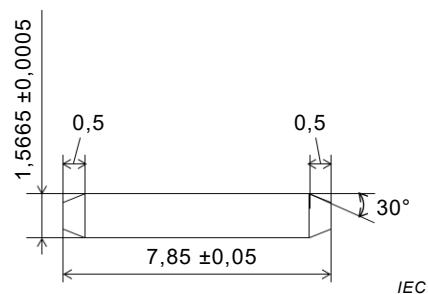

Alignment pin

Figure B.3 – TYPE F Flange for waveguide sizes C580 up to C 29000

Dimensions in millimetres

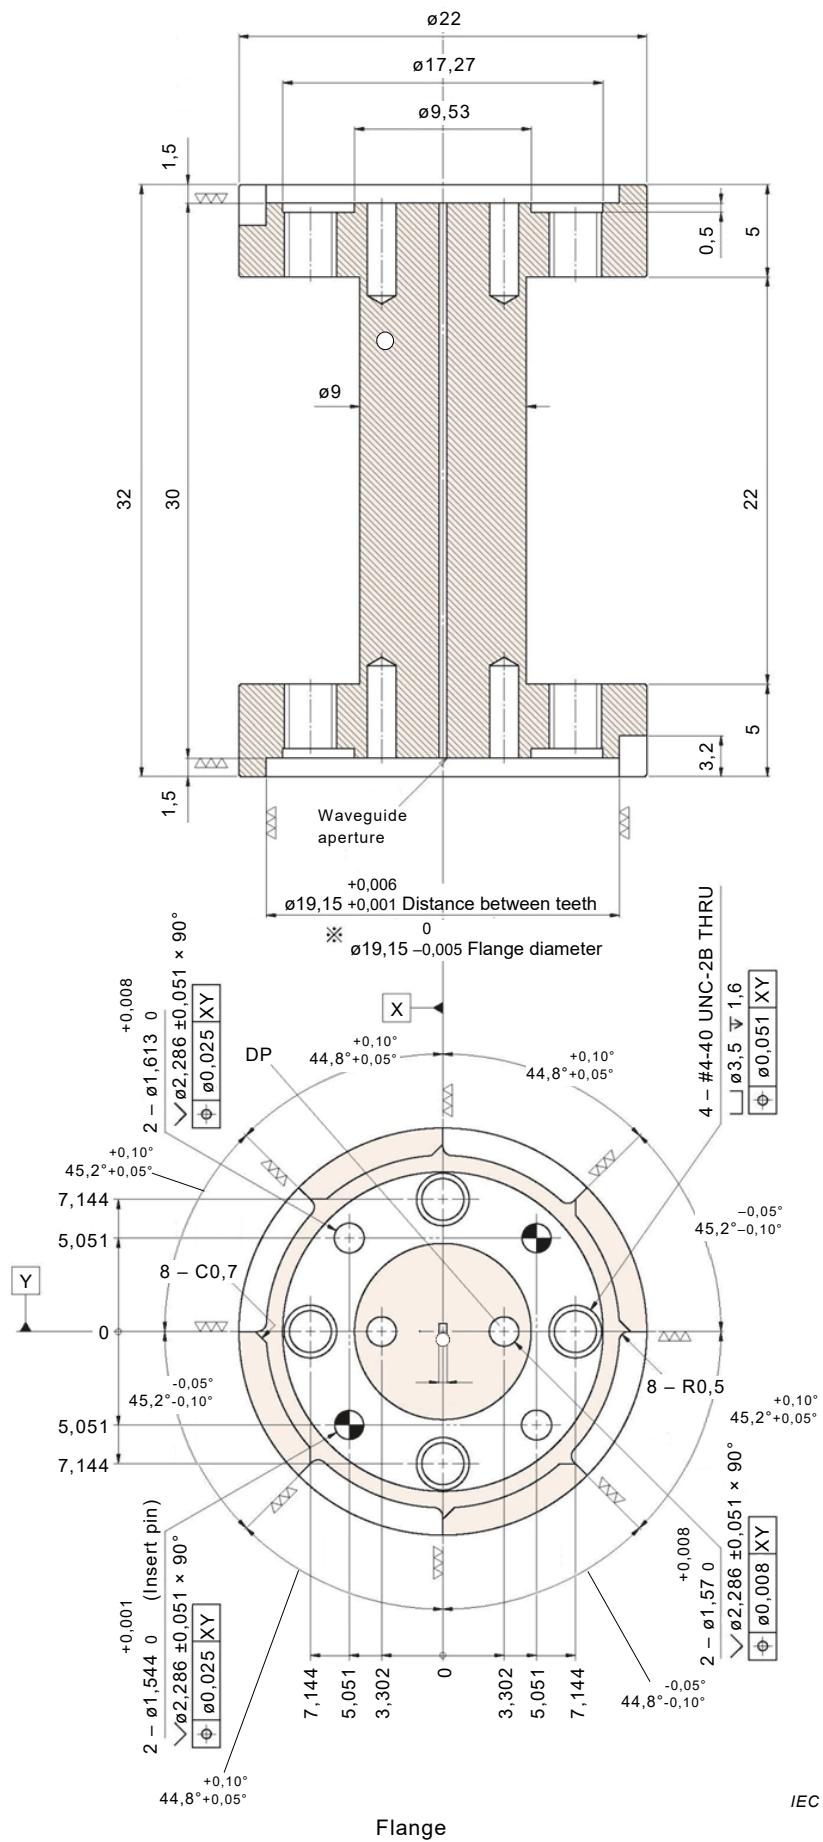

Dimensions in millimetres

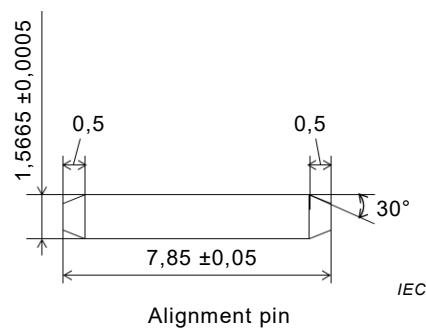


Figure B.4 – TYPE G Flange for waveguide sizes C580 up to C 29000

Bibliography

IEC 60153 (all parts), *Hollow metallic waveguides*

IEC 60153-4, *Hollow metallic waveguides – Part 4: Relevant specifications for circular waveguides*

ISO/IEC Guide 98-1, *Uncertainty of measurement – Part 1: Introduction to the expression of uncertainty in measurement*

ISO/IEC Guide 98-3:2008, *Uncertainty of measurement – Part 3: Guide to the expression of uncertainty in measurement (GUM:1995)*

ISO/IEC 17025:2005, *General requirements for the competence of testing and calibration laboratories*

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 2016* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website- www.bis.gov.in or www.standardsbis.

This Indian Standard has been developed from Doc No.: LITD 06 (17925).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002	<i>Telephones</i> 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091	 2367 0012 2320 9474
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019	 265 9930
Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113	 2254 1442 2254 1216
Western : Plot No. E-9, Road No.-8, MIDC, Andheri (East), Mumbai 400093	 2821 8093

Branches : AHMEDABAD. BENGALURU. BHOPAL. BHUBANESHWAR. CHANDIGARH. CHENNAI.
COIMBATORE. DEHRADUN. DELHI. FARIDABAD. GHAZIABAD. GUWAHATI.
HIMACHAL PRADESH. HUBLI. HYDERABAD. JAIPUR. JAMMU & KASHMIR.
JAMSHEDPUR. KOCHI. KOLKATA. LUCKNOW. MADURAI. MUMBAI. NAGPUR.
NOIDA. PANIPAT. PATNA. PUNE. RAIPUR. RAJKOT. SURAT. VISAKHAPATNAM.