
सूचना प्रौद्योगिकी — कनेक्शनलैस मोड
नेटवर्क सेवा उपलब्ध कराने के लिए
प्रोटोकॉल आईएसडीएन सर्किट —
स्विच बी — चैनलों द्वारा अंडरलाईंग
सेवा का प्रावधान

**Information Technology — Protocol
for Providing the Connectionless-
Mode Network Service : Provision of
the Underlying Service by ISDN
Circuit-Switched B-Channels**

ICS 35.100.30

© BIS 2017



भारतीय मानक ब्यूरो

BUREAU OF INDIAN STANDARDS

मानक भवन, 9 बहादुरशाह ज़फर मार्ग, नई दिल्ली-110002

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG

NEW DELHI-110002

www.bis.gov.in www.standardsbis.in

NATIONAL FOREWORD

This Indian Standard (Part 5) which is identical with ISO/IEC 8473-5 : 1997 'Information technology — Protocol for providing the connectionless-mode network service: Provision of the underlying service by ISDN circuit-switched B-channels' issued by the International Organization for Standardization (ISO) and International Electro technical Commission (IEC) jointly was adopted by the Bureau of Indian Standards on the recommendation of the Information and Communication Technology Sectional Committee and approval of the Electronics and Information Technology Division Council.

This standard was originally published in 1993 identical to ISO 8473: 1988. This ISO standard has been divided into 05 parts (ISO/IEC 8473-1 : 1998 , ISO/IEC 8473-2 : 1996, ISO/IEC 8473-3 : 1995, ISO/IEC 8473-4 : 1995, ISO/IEC 8473-5 : 1997). IS 13611 has now been revised and has been divided in 05 parts in order to align it with the latest Publication of ISO/IEC 8473. The other parts of the series are:

- Part 1 Protocol specification
- Part 2 Provision of the underlying service by an ISO/IEC 8802 subnetwork
- Part 3 Provision of the underlying service by an X.25 subnetwork
- Part 4 Provision of the underlying service by a subnetwork that provides the OSI data link service

The text of ISO/IEC Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standard also exist. The corresponding Indian Standard which is to be substituted in their respective places is listed below along with its degree of equivalence for the edition indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO/IEC 7498-1 : 1994 Information technology — Open Systems Interconnection –Basic Reference Model : The Basic Model	IS 12373 (Part 1) : 1987 Basic reference model of open systems interconnection for information processing systems	Identical with ISO 7498 : 1984
ISO/IEC 8348 : 1993 Information technology — Open Systems Interconnection — Network service definition.	IS 13868 : 1993 Network service definition in data communications for information processing systems	Identical with ISO 8348 : 1987
ISO/IEC 8473-1 : 1994 Information technology — Protocol for providing the connectionless-mode network service: Protocol specification	Doc no. LITD 13 (3637) Information technology — Protocol for providing the connectionless-mode network service: Protocol specification (<i>under print</i>)	Identical
ISO/IEC 8473-3 : 1995 Information technology - Protocol for providing the connectionless-modenetwork service: Provision of the underlying service by an X.25 subnetwork	Doc no. LITD 13 (3498) Information technology — Protocol for providing the connectionless-modenetwork service: Provision of the underlying service by an X.25 subnetwork (<i>under print</i>)	do

(Continued on third cover)

Indian Standard

INFORMATION TECHNOLOGY — PROTOCOL FOR PROVIDING THE CONNECTIONLESS-MODE NETWORK SERVICE : PROVISION OF THE UNDERLYING SERVICE BY ISDN CIRCUIT-SWITCHED B-CHANNELS

1 Scope

This Recommendation | International Standard specifies the way in which the underlying service assumed by the protocol defined by ITU-T Rec. X.233 | ISO/IEC 8473-1 is provided by a subnetwork that conforms to Recommendation Q.931 through the operation of a Subnetwork Dependent Convergence Function (SND CF) as described in ISO/IEC 8648.

This Recommendation | International Standard also provides the PICS proforma for this protocol, in compliance with the relevant requirements, and in accordance with the relevant guidance, given in CCITT Rec. X.290 and ISO/IEC 9646-1.

2 Normative references

The following Recommendations and International Standards contain provisions which, through reference in this text, constitute provisions of this Recommendation | International Standard. At the time of publication, the editions indicated were valid. All Recommendations and Standards are subject to revision, and parties to agreements based on this Recommendation | International Standard are encouraged to investigate the possibility of applying the most recent edition of the Recommendations and Standards listed below. Members of IEC and ISO maintain registers of currently valid International Standards. The Telecommunication Standardization Bureau of the ITU maintains a list of currently valid ITU-T Recommendations.

2.1 Identical Recommendations | International Standards

- ITU-T Recommendation X.200 (1994) | ISO/IEC 7498-1:1994, *Information technology – Open Systems Interconnection – Basic Reference Model: The Basic Model*.
- CCITT Recommendation X.213 (1992) | ISO/IEC 8348:1993, *Information technology – Open Systems Interconnection – Network service definition*.
- ITU-T Rec. X.233 (1993) | ISO/IEC 8473-1:1994, *Information technology – Protocol for providing the connectionless-mode Network service: Protocol specification*.
- ITU-T Rec. X.622 (1994) | ISO/IEC 8473-3:1995, *Information technology – Protocol for providing the connectionless-mode Network service: Provision of the underlying service by an X.25 subnetwork*.
- ITU-T Rec. X.623 (1994) | ISO/IEC 8473-4:1995, *Information technology – Protocol for providing the connectionless-mode Network service: Provision of the underlying service by a subnetwork that provides the OSI data link service*.

2.2 Paired Recommendations | International Standards identical in technical content

- CCITT Recommendation X.290 (1992), *OSI conformance testing methodology and framework for protocol Recommendations for CCITT applications – General concepts*.
ISO/IEC 9646-1:1994, *Information technology – Open Systems Interconnection – Conformance testing methodology and framework – Part 1: General concepts*.

2.3 Additional references

- CCITT Recommendation I.231 (1988), *Circuit-mode bearer service categories*.
- ITU-T Recommendation I.430 (1993), *Basic user-network interface – Layer 1 specification*.
- ITU-T Recommendation I.431 (1993), *Primary rate user-network interface – Layer 1 specification*.

- ITU-T Recommendation Q.921 (1993), *ISDN user-network interface – Data link layer specification*.
- ITU-T Recommendation Q.931 (1993), *Digital Subscriber Signalling System No. 1 (DSS 1) – ISDN user-network interface layer 3 specification for basic call control*.
- ITU-T Recommendation X.25 (1993), *Interface between Data Terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in the packet mode and connected to public data networks by dedicated circuit*.
- CCITT Recommendation X.121 (1992), *International numbering plan for public data networks*.
- ISO/IEC 7776:1995, *Information technology – Telecommunications and information exchange between systems – High-level data link control procedures – Description of the X.25 LAPB-compatible DTE data link procedures*.
- ISO/IEC 8208:1995, *Information technology – Data communications – X.25 Packet Layer Protocol for Data Terminal Equipment*.
- ISO 8648:1988, *Information processing systems – Open Systems Interconnection – Internal organization of the Network Layer*.
- ISO/IEC 11575:1995, *Information technology – Telecommunications and information exchange between systems – Protocol mappings for the OSI Data Link service*.

3 Definitions

3.1 Reference model definitions

This Recommendation | International Standard makes use of the following terms defined in ITU-T Rec. X.200 | ISO/IEC 7498-1:

- a) network entity;
- b) Network layer;
- c) service;
- d) service data unit;
- e) protocol control information.

3.2 Network layer architecture definitions

This Recommendation | International Standard makes use of the following terms defined in ISO/IEC 8648:

- a) subnetwork;
- b) subnetwork dependent convergence protocol;
- c) subnetwork dependent convergence function;
- d) subnetwork access protocol.

3.3 Network layer addressing definitions

This Recommendation | International Standard makes use of the following term defined in CCITT Rec. X.213 | ISO/IEC 8348:

- subnetwork point of attachment.

4 Abbreviations

For the purposes of this Recommendation | International Standard, the following abbreviations apply:

CLNP	Connectionless-mode Network Protocol
DCE	Data Circuit-terminating Equipment
DTE	Data Terminal Equipment
ES	End System
IS	Intermediate System

ISDN	Integrated Services Digital Network
PDU	Protocol Data Unit
PVC	Permanent Virtual Circuit
QOS	Quality of Service
SDU	Service Data Unit
SN	Subnetwork
SND CF	Subnetwork Dependent Convergence Function
SND CP	Subnetwork Dependent Convergence Protocol
SNICP	Subnetwork Independent Convergence Protocol
SNAC P	Subnetwork Access Protocol
SNPA	Subnetwork Point of Attachment
SNCR	Subnetwork Connection Reference
SNSDU	Subnetwork Service Data Unit
TA	Terminal Adapter
TE	Terminal Equipment

5 Subnetwork dependent convergence function

5.1 General model

The general model for providing the underlying service assumed by the protocol in conjunction with a real subnetwork that uses a connectionless subnetwork access protocol is as follows. The generation of an SN-UNIT-DATA Request by the CLNP results in the generation of a corresponding subnetwork-specific UNIT-DATA request by the subnetwork dependent convergence function. The receipt of a subnetwork-specific UNIT-DATA indication associated with delivery of a connectionless data unit to its destination causes the SND CF to generate an SN-UNIT-DATA indication to the CLNP.

The general model for providing the underlying service assumed by the CLNP in conjunction with a real subnetwork that uses a connection-mode subnetwork access protocol is as follows. The generation of an SN-UNIT-DATA request by the CLNP causes a connection (logical channel, logical link, or the equivalent) to be made available for the transmission of SN-User-data. If a connection cannot be made available, the SN-UNIT-DATA Request is discarded. The receipt of subnetwork-specific PDUs containing SN-User-data causes the SND CF to generate an SN-UNIT-DATA indication to the CLNP.

Where a real subnetwork is designed to use either a connectionless-mode or a connection-mode subnetwork access protocol, the provision of the underlying service assumed by the CLNP is achieved by using the connectionless-mode alternative.

5.2 Subnetwork user data

The SN-Userdata is an ordered multiple of octets, and is transferred transparently between the specified subnetwork points of attachment.

The underlying service assumed by the CLNP is required to support a service data unit size of at least 512 octets.

If the minimum service data unit sizes supported by all of the subnetworks involved in the transmission of a particular PDU are known to be large enough that segmentation is not required, then either the full protocol or the non-segmenting protocol subset may be used.

Data received from a subnetwork with protocol identification specifying this protocol (see ITU-T Rec. X.233 | ISO/IEC 8473-1) shall be processed according to this Recommendation | International Standard.

NOTE – Data with other protocol identification should be ignored, since it may have been sent by an implementation supporting additional protocols intended for use with this protocol.

5.3 Subnetwork dependent convergence functions used with ISDN circuit-switched B-channel

5.3.1 The ISDN environment

This SNDCF applies when an ISDN B-channel is used to carry the PDUs as defined in ITU-T Rec. X.233 | ISO/IEC 8473-1 between systems. In this context a system may be either an End System (ES) or an Intermediate System (IS), as shown in Figure 1. The underlying ISDN service is the 64 kbit/s bearer service as described in Recommendation I.231.

NOTE – The use of more than one B-channel between a pair of systems is not precluded. When more than one B-channel is used, the single link procedures of ISO/IEC 7776 shall be used on each.

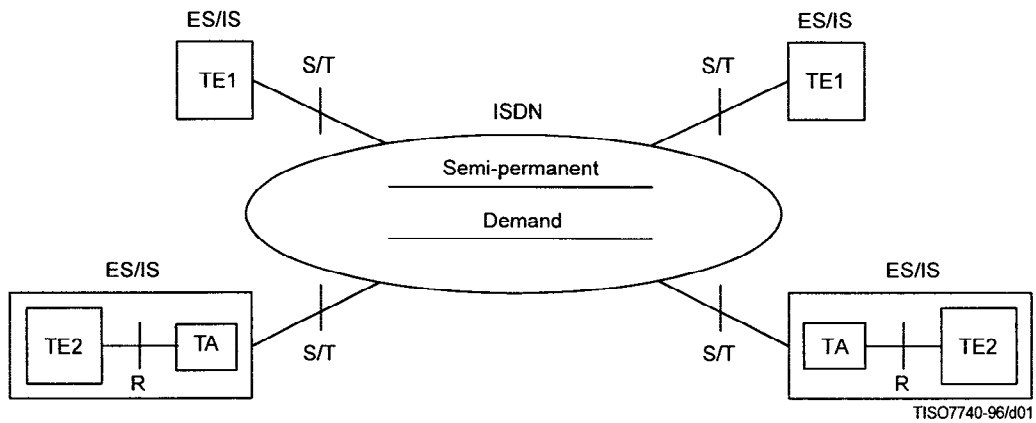


Figure 1 – ES-to-IS, IS-to-IS, or ES-to-ES directly connected via ISDN

Once the B-channel has been established (see 5.3.2.2 or 5.3.2.3) the requirements of ITU-T Rec. X.623 | ISO/IEC 8473-4 shall be applied, i.e. the SNDCF for operation over a subnetwork which provides the OSI Data Link service.

The ES or IS may be either a TE1 or TE2/TA terminal supporting the ISDN B-channel presenting the protocol stacks at the S- or T- reference point in accordance with the Recommendations and International Standards shown in Figure 2.

Network Layer	ISO/IEC 8473-1	
	SNDCF for ISDN ← This Recommendation International Standard	
Data Link Layer	Q.931	ISO/IEC 8473-4
	Q.921	ISO/IEC 11575 (Use of ISO/IEC 7776 to provide the DL service)
Physical Layer	D-channel I.430	or B-channel I.431

TISO7750-96/d02

Figure 2 – Protocol layers at S- and T-reference points

5.3.2 Procedures for a TE1 or TE2/TA

This subclause covers the use of semi-permanent or demand access B-channel connections that can be available to the TE1 or TE2/TA terminals.

NOTE – The use of the D-channel to operate the CLNP is outside the scope of this Recommendation | International Standard.

The mapping of elements of the CLNS to the protocol and procedures of ISO/IEC 8473 is specified in CCITT Rec. X. 213 | ISO/IEC 8348. The following subclauses specify the provision required in addition to these mappings by systems attached to the S/T reference points.

5.3.2.1 Additional procedures for a TE1 or TE2/TA when using the ISDN B-channel to directly connect to a remote terminal.

The ES or IS shall implement at the S/T reference points the protocol stacks shown in Figure 2. One of the stacks is used to support signalling necessary to establish the ISDN circuit switched connection to the remote terminal, and the other is used to support the CLNP itself. At the physical layer, Recommendation I.430 shall be used if the access is via the basic rate interface, and Recommendation I.431 shall be used if the access is via the primary rate interface. At the data link layer, Recommendation Q.921 shall be used over the D-channel and ISO/IEC 7776 shall be used over the B-channel after it has been established. At the network layer, Recommendation Q.931 shall be used over the D-channel to convey signalling information to the ISDN for the purposes of ISDN connection establishment, and ISO/IEC 8473 shall be used over the B-channel for information transfer.

5.3.2.2 Semi-permanent B-channel connection

ISO/IEC 7776 shall be used in accordance with ISO/IEC 11575 to provide the OSI Connection-mode Data Link Service. This service may be used either:

- a) in accordance with ITU-T Rec. X.623 | ISO/IEC 8473-4 to provide the ISO/IEC 8473 underlying service; or
- b) in accordance with ISO/IEC 8208 to operate the X.25 packet layer protocol. In this case the ISO/IEC 8473 underlying service shall be provided in accordance with ITU-T Rec. X.622 | ISO/IEC 8473-3.

The two terminals shall agree, *a priori*, on the values of the addresses permitted by ISO/IEC 7776 that each will use.

5.3.2.3 Demand access B-channel connection

The receipt of an SN-UNIT-DATA request primitive, destined for a remote ES or IS to which no ISDN connection already exists, shall cause the SNDCEF to initiate ISDN D-channel procedure for demand access to establish a B-channel connection. A circuit switched bearer service is requested and the called party number information element (of Recommendation Q.931) is set to the ISDN address corresponding to the remote ES/IS, to which the connection is to be established. The lower layer compatibility information element may also be sent indicating that layer 2 uses the X.25 Data Link control procedures (ISO/IEC 7776) and that layer 3 is either ISO/IEC 8473 (in the case that the procedures of ITU-T Rec. X.623 | ISO/IEC 8473-4 are used), or is ISO/IEC 8208 (in the case that the procedures of ITU-T Rec. X.622 | ISO/IEC 8473-3 are used).

Following successful establishment of the B-channel connection, including its entering of the data transfer phase at layer 1, the following procedures are recommended for establishing the data link connection using ISO/IEC 7776 for the data link entities in the two communicating systems:

- a) upon notification of a B-channel connection, activate the receiver;
- b) send a sequence of flags;
- c) upon receipt of the first flag from the remote entity start the data link establishment procedures as defined in ISO/IEC 7776 (i.e. the SABM/UA exchange).

The entity that initiates the establishment of the B-channel (i.e. the calling party) shall use address A as specified in ISO/IEC 7776. The remote entity (i.e. the called party) shall use address B.

ISO/IEC 7776 shall be used in accordance with ISO/IEC 11575 to provide the OSI Connection-mode Data Link Service. This service may be used either:

- a) in accordance with ITU-T Rec. X.623 | ISO/IEC 8473-4 to provide the ISO/IEC 8473 underlying service; or
- b) in accordance with ISO/IEC 8208 to operate the X.25 packet layer protocol. In this case the ISO/IEC 8473 underlying service shall be provided in accordance with ITU-T Rec. X.622 | ISO/IEC 8473-3.

When a Data link connection is released, the B-channel may, as a local decision, be disconnected using the procedures of Recommendation Q.931.

The address parameters and the Quality of Service parameters in the SN-UNIT-DATA primitives shall be treated in accordance with 8.1 and 8.2 of ITU-T Rec. X.233 | ISO/IEC 8473-1, respectively.

5.3.3 Call set-up considerations

The mechanism and timing for opening a connection prior to the transmission of SN-User-data are a local matter. The opening of a connection may be initiated by:

- a) the arrival of an SNSDU to be transmitted over ISDN at a time when no suitable connection is available;
- b) the local queue of requests waiting for an existing connection reaching a threshold size at which an additional connection shall be made available (if possible) to maintain the requested QOS; or
- c) the explicit intervention of system management.

When it has been determined that a (new) connection must be made available, the calling SND CF performs all functions associated with establishing a connection. The called SND CF performs those operations associated with accepting a call, but generates no SN-UNIT-DATA indication until the call set-up is completed.

5.3.4 Call clearing considerations

The mechanisms for determining when a connection is to be cleared following the transmission of SN-User-data by the SND CF are local matters. Examples of circumstances which would cause the SND CF to clear a connection are:

- a) the expiration of a timeout period following the transmission of one or more PDUs (see 5.3.3);
- b) the need to use a specific interface to open an alternate connection from the local network entity to a different remote network entity;
- c) the explicit intervention of system management; or
- d) a provider-initiated clear of a connection.

When it has been determined that a connection shall be cleared, the SND CF performs all functions associated with clearing a call. In these circumstances, the SND CF will retain user data submitted via SN-UNIT-DATA requests while attempting to establish a new circuit; however, the SND CF shall discard the user data if the transit delay indicated to the CLNP is likely to be exceeded.

NOTE – It is not a requirement that connections be dynamically opened or closed for the correct operation of the SND CF herein described. The use of permanent connections or the maintenance of connections in a open state from system initialization is not precluded.

5.3.5 Timeout periods

Timeout periods may be used to determine when a connection should be cleared (for example, when a connection has been idle for a long period of time) or when additional connections should be opened (for example, when there is an excessively long queue of data units waiting for transmission).

Implementations may choose to clear a connection after it has been idle for some period of time. If a timer is selected for this purpose, it is used in the following manner. When a connection is made available for the transmission of SNSDUs, a timer is initiated with a value representing the maximum period of time this connection may remain idle. Each time a data unit is transmitted by the underlying service, the timer is reset to this initial value. If no data units are queued for processing and this timer expires, the connection is cleared.

The selection of timeout values is a local matter.

NOTES

1 Additional connections may be opened when there is an excessively long queue of data units waiting for the initial logical channel. The timeout periods for determining when such additional connections are to be cleared may be shorter than the timeout period for the initial connection. (The timeout period may also be a fixed period of time.) Implementations may choose to close all additional connections if the queue of data units to be transmitted reaches some threshold (possibly zero).

2 Timeout periods are selected on the basis of economic and implementation-specific criteria. If there is no duration charge imposed by a given subnetwork authority for leaving a connection open, and if there is a charge for opening connections, then the timeout period may be selected so that the connection remains open for a long period of time. Timeout periods may also vary according to the time of day, traffic load (averaged over the recent past), or other factors.

5.3.6 Priority

As part of its operation to manage connections, the SNDCF may perform a priority function with respect to SN-UNIT-DATA requests that specify priority as a QOS parameter. Specifically, the SNDCF may open a new connection to handle the higher-priority traffic, or close an existing connection in order to free local system resources to enable it to process higher-priority traffic for which no resources would otherwise be available.

6 Conformance

6.1 Static conformance

An implementation claiming conformance to this Recommendation | International Standard shall support the use of either Semi-permanent B-channel connections or Demand access to B-channel connections, or both.

6.2 Dynamic conformance

Implementations supporting Semi-permanent B-channels shall conform to the procedures specified in 5.3.2.2, 5.3.3-5.3.6

Implementations supporting Demand Access to B-channels shall conform to the procedures specified in 5.3.2.3, 5.3.3-5.3.6.

6.3 PICS proforma

The supplier of a protocol implementation that claims conformance to this Recommendation | International Standard shall complete a copy of the PICS proforma provided in Annex A, including the information necessary to identify both the supplier and the implementation.

Annex A¹⁾

PICS proforma

(This annex forms an integral part of this Recommendation | International Standard)

A.1 Introduction

The supplier of a protocol implementation which is claimed to conform to this Recommendation | International Standard shall complete the following Protocol Implementation Conformance Statement (PICS) proforma.

A completed PICS proforma is the PICS for the implementation in question. The PICS is a statement of which capabilities and options of the protocol have been implemented. The PICS can have a number of uses, including use:

- by the protocol implementor, as a check-list to reduce the risk of failure to conform to the standard through oversight;
- by the supplier and acquirer – or potential acquirer – of the implementation, as a detailed indication of the capabilities of the implementation, stated relative to the common basis for understanding provided by the standard PICS proforma;
- by the user – or potential user – of the implementation, as a basis for initially checking the possibility of interworking with another implementation (note that, while interworking can never be guaranteed, failure to interwork can often be predicted from incompatible PICSs);
- by a protocol tester, as the basis for selecting appropriate tests against which to assess the claim for conformance of the implementation.

A.2 Abbreviations and special symbols

A.2.1 Status symbols

- M Mandatory
O Optional
O.<n> Optional, but support of at least one of the group of options labelled by the same numeral <n> is required
X Prohibited
<pred>: Conditional-item symbol, including predicate identification (see A.3.4)
^ Logical negation, applied to a conditional item's predicate

A.2.2 Other symbols

- <r> Receive aspects of an item
<s> Send aspects of an item

A.3 Instructions for completing the PICS proforma

A.3.1 General structure of the PICS proforma

The first part of the PICS proforma – Implementation Identification and Protocol Summary – is to be completed as indicated with the information necessary to identify fully both the supplier and the implementation.

The main part of the PICS proforma is a fixed-format questionnaire divided into a number of major clauses; these can be divided into further subclauses each containing a group of individual items. Answers to the questionnaire items are to be provided in the rightmost column, either by simply marking an answer to indicate a restricted choice (usually Yes or No), or by entering a value or a set or range of values.

NOTE 1 – There are some items for which two or more choices from a set of possible answers can apply. All relevant choices are to be marked in these cases.

¹⁾ Copyright release for PICS proforma:

Users of this Recommendation | International Standard may freely reproduce the PICS proforma in this annex so that it can be used for its intended purpose and may further publish the completed PICS.

Each item is identified by an item reference in the first column; the second column contains the question to be answered; and the third column contains the reference or references to the material that specifies the item in the main body of this Recommendation | International Standard. The remaining columns record the status of the item – whether support is mandatory, optional, prohibited, or conditional – and provide space for the answers (see also A.3.4).

A supplier may also provide further information, categorized as either Additional Information or Exception Information. When present, each kind of further information is to be provided in a further subclause of items labelled A<i> or X<i>, respectively, for cross-referencing purposes, where <i> is any unambiguous identification for the item (e.g. a number); there are no other restrictions on its format or presentation.

A completed PICS proforma, including any Additional Information and Exception Information, is the Protocol Implementation Conformance Statement for the implementation in question.

NOTE 2 – Where an implementation is capable of being configured in more than one way, a single PICS may be able to describe all such configurations. However, the supplier has the choice of providing more than one PICS, each covering some subset of the implementation's configuration capabilities, in cases where this makes for easier and clearer presentation of the information.

A.3.2 Additional Information

Items of Additional Information allow a supplier to provide further information intended to assist in the interpretation of the PICS. It is not intended or expected that a large quantity will be supplied, and a PICS can be considered complete without any such information. Examples might be an outline of the ways in which a (single) implementation can be set up to operate in a variety of environments and configurations, or a brief rationale – based perhaps upon specific application needs – for the exclusion of features which, although optional, are nonetheless commonly present in implementations of this protocol.

References to items of Additional Information may be entered next to any answer in the questionnaire, and may be included in items of Exception Information.

A.3.3 Exception Information

It may occasionally happen that a supplier will wish to answer an item with mandatory or prohibited status (after any conditions have been applied) in a way that conflicts with the indicated requirement. No pre-printed answer will be found in the support column for this; instead, the supplier shall write the missing answer into the Support column, together with an X<i> reference to an item of Exception Information, and shall provide the appropriate rationale in the Exception Information item itself.

An implementation for which an Exception Information item is required in this way does not conform to this Recommendation | International Standard.

NOTE – A possible reason for the situation described above is that a defect in the standard has been reported, a correction for which is expected to change the requirement not met by the implementation.

A.3.4 Conditional status

A.3.4.1 Conditional items

The PICS proforma contains a number of conditional items. These are items for which the status – mandatory, optional, or prohibited – that applies is dependent upon whether or not certain other items are supported, or upon the values supported for other items.

In many cases, whether or not the item applies at all is conditional in this way, as well as the status when the item does apply.

Where a group of items is subject to the same condition for applicability, a separate preliminary question about the condition appears at the head of the group, with an instruction to skip to a later point in the questionnaire if the “Not Applicable” answer is selected. Otherwise, individual conditional items are indicated by one or more conditional symbols (on separate lines) in the status column.

A conditional symbol is of the form “<pred>:<x>” where “<pred>” is a predicate as described in A.3.4.2, and “<x>” is one of the status symbols M, O, O.<n>, or X.

If the value of the predicate in any line of a conditional item is true (see A.3.4.2), then the conditional item is applicable, and its status is that indicated by the status symbol following the predicate; the answer column is to be marked in the usual way. If the value of a predicate is false, the Not Applicable (N/A) answer is to be marked in the relevant line. Each line in a multi-line conditional item should be marked: at most one line will require an answer other than N/A.

A.3.4.2 Predicates

A predicate is one of the following:

- a) An item-reference for an item in the PICS proforma – The value of the predicate is true if the item is marked as supported, and is false otherwise.
- b) A predicate name, for a predicate defined elsewhere in the PICS proforma (usually in the Major Capabilities section or at the end of the section containing the conditional item) – See below; or
- c) The logical negation symbol “^” prefixed to an item-reference or predicate name – The value of the predicate is true if the value of the predicate formed by omitting the “^” is false, and vice versa.

The definition for a predicate name is one of the following:

- a) an item-reference, evaluated as at (a) above;
- b) a relation containing a comparison operator (=, < , etc.) with at least one of its operands being an item-reference for an item taking numerical values as its answer; the predicate is true if the relation holds when each item-reference is replaced by the value entered in the Support column as an answer to the item referred to; or
- c) a boolean expression constructed by combining simple predicates, as in a) and b), using the boolean operators AND, OR, and NOT, and parentheses, in the usual way; the value of such a predicate is true if the boolean expression evaluates to true when the simple predicates are interpreted as described above.

Each item whose reference is used in a predicate or predicate definition is indicated by an asterisk in the Item column.

A.4 Identification

A.4.1 Implementation identification

Supplier	
Contact point for queries about the PICS	
Implementation name(s) and version(s)	
Other information necessary for full identification [e.g. name(s) and version(s) of machines and/or operating systems, system name(s)]	
<p>NOTES</p> <p>1 Only the first three items are required for all implementations; other information may be completed as appropriate in meeting the requirement for full identification.</p> <p>2 The term Name and Version should be interpreted appropriately to correspond with a supplier’s terminology (e.g. Type, Series, Model).</p>	

A.4.2 Protocol summary

Identification of protocol specification	ITU-T Rec. X.625 (1996) ISO/IEC 8473-5:1995
Identification of corrigenda and amendments to the PICS proforma	
Protocol version(s) supported	
<p>Have any Exception Information items been required (see A.3.3)? YES <input type="checkbox"/> NO <input type="checkbox"/></p> <p>(The answer YES means that the implementation does not conform to this Recommendation International Standard)</p>	
Date of Statement	

A.5 Subnetwork dependent convergence functions for use with X.25 subnetworks

A.5.1 Applicability

Subclause A.5 is applicable to all implementations that claim conformance to this Recommendation | International Standard.

A.5.2 B-Channel capabilities

Item	Function	Reference	Status	Support
PERM	Semi-permanent B-channel connection	5.3.2.2	O.1	YES <input type="checkbox"/> NO <input type="checkbox"/>
SW	Demand access B-channel connection	5.3.2.3	O.1	YES <input type="checkbox"/> NO <input type="checkbox"/>

A.5.3 Underlying Protocol Support

Item	Function	Reference	Status	Support
ISO 7776	OSI Data Link service	5.3.2.2 a)	O.2	YES <input type="checkbox"/> NO <input type="checkbox"/>
ISO 8208	X.25 Packet layer	5.3.2.3 b)	O.2	YES <input type="checkbox"/> NO <input type="checkbox"/>

A.5.4 User Data requirements

Item	Function	Reference	Status	Support
XSNUD	Is Subnetwork User Data of at least 512 octets transferred by the SNDCEF?	5.2	M	YES <input type="checkbox"/>
XSNTD	Is Transit Delay determined by the SNDCEF prior to the processing of the user data?		M	YES <input type="checkbox"/>

A.5.5 Call setup Considerations

Item	Function	Reference	Status	Support
	Is a new call setup:	5.3.3		
XCalla	a) when no suitable call exists?	5.3.3.a)	O.3	YES <input type="checkbox"/> NO <input type="checkbox"/>
XCallb	b) When queue threshold reached?	5.3.3.b)	O.3	YES <input type="checkbox"/> NO <input type="checkbox"/>
XCallc	c) by systems management?	5.3.3.c)	O.3	YES <input type="checkbox"/> NO <input type="checkbox"/>
XCalld	d) when queue threshold reached and timer expires?	5.3.5	O.3	YES <input type="checkbox"/> NO <input type="checkbox"/>
XCalles	e) by other local means?	5.3.3	O.3	YES <input type="checkbox"/> NO <input type="checkbox"/>

A.5.6 Call clearing Considerations

Item	Function	Reference	Status	Support
	Are calls cleared:	5.3.4		
XClra	a) when idle timer expires?	5.3.4 a)/5.3.5	O.4	YES <input type="checkbox"/> NO <input type="checkbox"/>
XClrb	b) when need to re-use circuit?	5.3.4 b)	O.4	YES <input type="checkbox"/> NO <input type="checkbox"/>
XClrc	c) by systems management?	5.3.4 c)	O.4	YES <input type="checkbox"/> NO <input type="checkbox"/>
XClrd	d) by provider?	5.3.4 d)	M	YES <input type="checkbox"/>
XClrc	e) by other local means?	5.3.4	O.4	YES <input type="checkbox"/> NO <input type="checkbox"/>

A.5.7 SNDCF Timers

Item	Timer	Reference	Status	Support	Values Supported
XIDL	Connection Idle Timer	5.3.5	Clra:O	YES <input type="checkbox"/> NO <input type="checkbox"/>	
XAC	Additional Connection	5.3.5	O	YES <input type="checkbox"/> NO <input type="checkbox"/>	

(Continued from second cover)

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO/IEC 8473-4 : 1995 Information technology - Protocol for providing the connectionless-mode network service: Provision of the underlying service by a subnetwork that provides the OSI data link service	Doc no. LITD 13(3499) Information technology - Protocol for providing the connectionless-mode network service: Provision of the underlying service by a subnetwork that provides the OSI data link service (<i>under print</i>)	Identical

The technical committee has reviewed the provisions of the following international standards referred in this adopted standard and has decided that they are acceptable for use in conjunction with these standards:

<i>International/Other Standard</i>	<i>Title</i>
ISO/IEC 7776 : 1995	Information technology - Telecommunications and information exchange between systems - High-level data link control procedures - Description of the X.25 LAPB-compatible DTE data link procedures.
ISO/IEC 8208 : 1995	Information technology - Data communications - X.25 Packet Layer Protocol for Data Terminal Equipment
ISO 8648 : 1988	Information processing systems - Open Systems Interconnection - Internal organization of the Network Layer
ISO/IEC 9646-1 : 1991	Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts.
ISO/IEC 11575 : 1995	Information technology - Telecommunications and information exchange between systems - Protocol mappings for the OSI Data Link service
CCITT Recommendation I.231 (1988)	Circuit-mode bearer service categories.
CCITT Recommendation X.121 (1992)	International numbering plan for public data networks.
ITU-T Recommendation I.430 (1993)	Basic user-network interface - Layer I specification.
ITU-T Recommendation I.431 (1993)	Primary rate user-network interface - Layer I specification.
ITU-T Recommendation Q.921 (1993)	ISDN user-network interface - Data link layer specification.
ITU-T Recommendation Q.931 (1993)	Digital Subscriber Signalling System No. 1 (DSS 1) ISDN user-network interface layer 3 specification for basic call control
ITU-T Recommendation X.25 (1993)	Interface between Data Terminal Equipment (DTE) and Data Circuit-terminating Equipment (DCE) for terminals operating in the packet mode and connected to public data networks by dedicated circuit.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards: Monthly Additions'.

This Indian Standard has been developed from Doc No.: LITD 13 (3500).

Amendments Issued Since Publication

Amendment No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

Telephones

Central	: Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110002	{ 2323 7617 2323 3841
Eastern	: 1/14, C.I.T. Scheme VII M, V.I.P. Road, Kankurgachi KOLKATA 700054	{ 2337 8499, 2337 8561 2337 8626, 2337 9120
Northern	: Plot No. 4-A, Sector 27-B, Madhya Marg, CHANDIGARH 160019	{ 26 50206 265 0290
Southern	: C.I.T. Campus, IV Cross Road, CHENNAI 600113	{ 2254 1216, 2254 1442 2254 2519, 2254 2315
Western	: Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400093	{ 2832 9295, 2832 7858 2832 7891, 2832 7892

Branches : AHMEDABAD. BENGALURU. BHOPAL. BHUBANESWAR. COIMBATORE.
DEHRADUN. DURGAPUR. FARIDABAD. GHAZIABAD. GUWAHATI.
HYDERABAD. JAIPUR. JAMMU. JAMSHEDPUR. KOCHI. LUCKNOW. NAGPUR.
PARWANOO. PATNA. PUNE. RAIPUR. RAJKOT. VISAKHAPATNAM.