

---

---

तुल्यकालिक बेल्ट ड्राइव —  
ऑटोमोटिव बेल्ट

Synchronous Belt Drives —  
Automotive Belts

ICS 21.220.10, 43.060.10

© BIS 2017



भारतीय मानक ब्यूरो  
BUREAU OF INDIAN STANDARDS  
मानक भवन, 9 बहादुरशाह ज़फर मार्ग, नई दिल्ली-110002  
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG  
NEW DELHI-110002  
[www.bis.org.in](http://www.bis.org.in) [www.standardsbis.in](http://www.standardsbis.in)

## NATIONAL FOREWORD

This Indian Standard which is identical with ISO 9010 : 1997 'Synchronous belt drives — Automotive belts' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of the Transmission Devices Sectional Committee and approval of the Production and General Engineering Division Council.

The text of ISO Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain terminology and conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

The technical committee has reviewed the provisions of following International Standard referred in this adopted standard and has decided that it is acceptable for use in conjunction with this standard:

<i>International Standard</i>	<i>Title</i>
ISO 9011 : 1997	Synchronous belt drives — Automotive pulleys

Details of BIS Certification Marking is given in National Annex A.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

*Indian Standard*  
**SYNCHRONOUS BELT DRIVES — AUTOMOTIVE  
BELTS**

## **1 Scope**

This International Standard specifies the characteristics of synchronous endless belts for use in automotive applications such as engine camshaft drives.

The characteristics include

- nominal tooth dimensions;
- pitch spacing;
- width and width tolerance;
- pitch length and pitch length tolerance.

Test methods for measuring pitch length and lateral runout are also included.

## **2 Normative reference**

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 9011:1997, *Synchronous belt drives — Automotive pulleys*.

## **3 Belt types**

The following types of synchronous belts for automotive application are standardized:

- type ZA: trapezoidal tooth;
- type ZB: trapezoidal tooth;
- type ZH: curvilinear tooth, "H" system;

- type YH: curvilinear tooth, "H" system;
- type ZR: curvilinear tooth, "R" system;
- type YR: curvilinear tooth, "R" system;
- type ZS: curvilinear tooth, "S" system;
- type YS: curvilinear tooth, "S" system.


Corresponding pulleys are standardized in ISO 9011.

## 4 Designation

A belt is designated by a series of numbers and letters as follows:

- a) the first set of numbers indicates the number of teeth;
- b) the first letter indicates tooth pitch;
- c) the second letter indicates tooth profile;
- d) the second set of numbers indicates the width in millimetres.


EXAMPLE

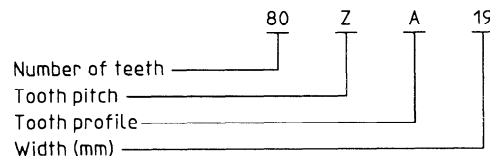

## 5 Dimensions and tolerances

### 5.1 Belt tooth dimensions — Trapezoidal tooth belts of types ZA and ZB

The nominal belt tooth dimensions for trapezoidal tooth belts of types ZA and ZB are shown in figure 1 and given in table 1.

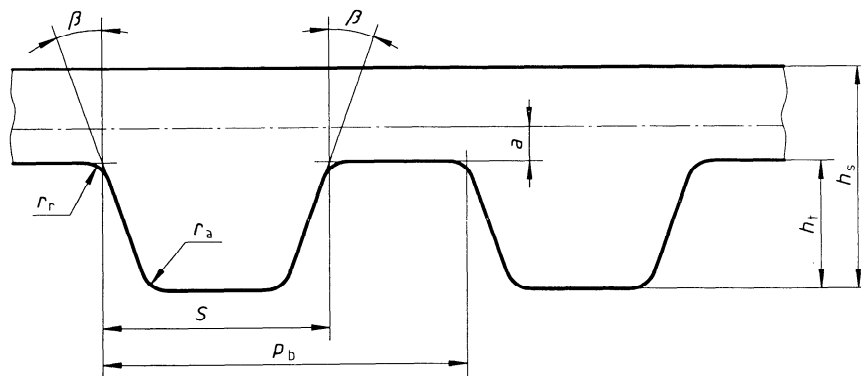

**Figure 1 — Nominal tooth dimensions (profile) for types ZA and ZB**


**Table 1 — Nominal tooth dimensions for types ZA and ZB**

Dimensions in millimetres, angles in degrees

Term	Symbol	Nominal profile	
		Type ZA	Type ZB
Tooth pitch	$p_b$	9,525	9,525
Tooth angle	$2\beta$	40	40
Height	$h_s$	4,1	4,5
Pitch line differential	$a$	0,686	0,686
Root radius	$r_r$	0,51	1,02
Tip radius	$r_a$	0,51	1,02
Tooth height	$h_t$	1,91	2,29
Tooth width	$S$	4,65	6,12

## 5.2 Belt tooth dimensions — Curvilinear tooth belts of types ZH and YH

The nominal belt tooth dimensions for curvilinear tooth belts of types ZH and YH are shown in figure 2 and given in table 2.

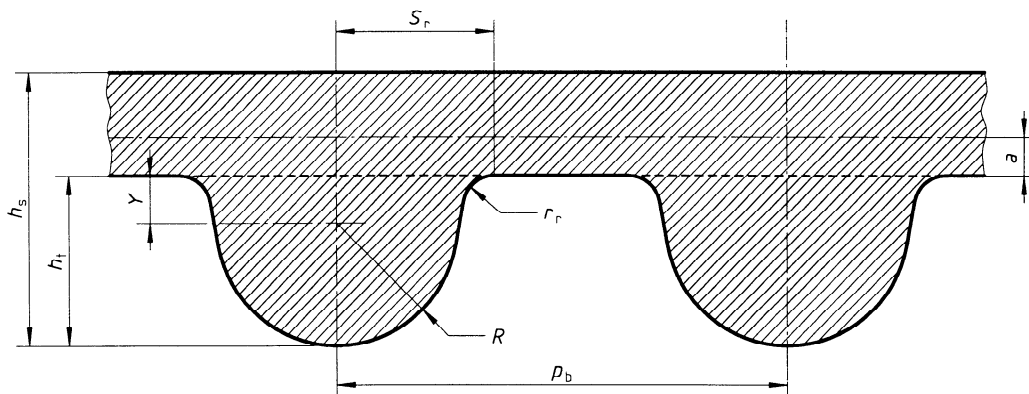

**Figure 2 — Nominal tooth dimensions (profile) for types ZH and YH**

**Table 2 — Nominal tooth dimensions for types ZH and YH**

Dimensions in millimetres

Term	Symbol	Nominal profile	
		Type ZH	Type YH
Tooth pitch	$p_b$	9,525	8
Height	$h_s$	5,5	5,2
Pitch line differential	$a$	0,686	0,686
Root radius	$r_r$	0,76	0,64
Tooth height	$h_t$	3,5	3,04
Tooth radius	$R$	2,45	2,11
Vertical offset	$Y$	1,05	0,93
Root radius distance	$S_r$	3,27	2,84

### 5.3 Belt tooth dimensions — Curvilinear tooth belts of types ZR and YR

The nominal tooth dimensions for curvilinear tooth belts of types ZR and YR are shown in figure 3 and given in table 3.

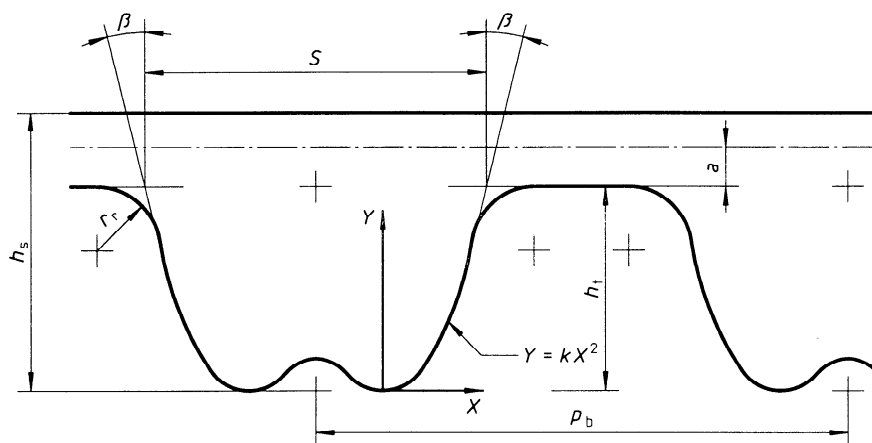


Figure 3 — Nominal tooth dimensions (profile) for types ZR and YR

Table 3 — Nominal tooth dimensions for types ZR and YR

Dimensions in millimetres, angles in degrees

Term	Symbol	Nominal profile	
		Type ZR	Type YR
Tooth pitch	$p_b$	9,525	8
Tooth angle	$2\beta$	32	30
Height	$h_s$	5,4	5,1
Pitch line differential	$a$	0,75	0,75
Root radius	$r_r$	1	0,8
Tooth height	$h_t$	3,2	2,8
Tooth width	$S$	5,5	5,3
Tooth form parameter	$k$	1,228	1,692

#### 5.4 Belt tooth dimensions — Curvilinear tooth belts of types ZS and YS

The nominal tooth dimensions for curvilinear tooth belts of types ZS and YS are shown in figure 4 and given in table 4.

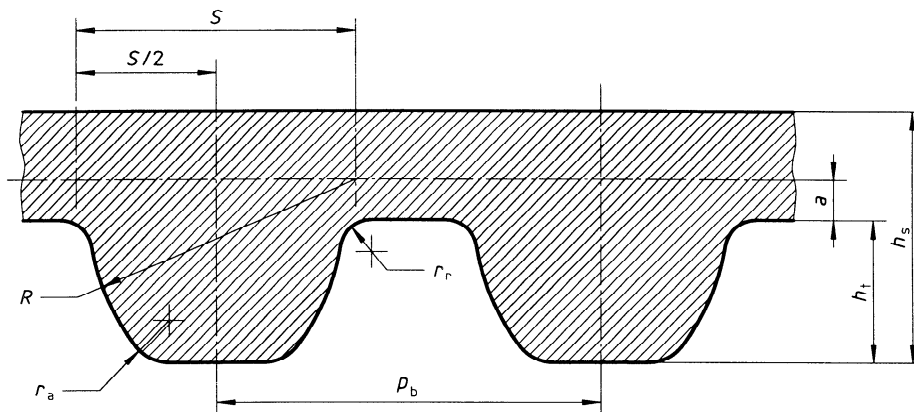


Figure 4 — Nominal tooth dimensions (profile) for types ZS and YS

Table 4 — Nominal tooth dimensions for types ZS and YS

Dimensions in millimetres

Term	Symbol	Nominal profile	
		Type ZS	Type YS
Tooth pitch	$p_b$	9,525	8
Height	$h_s$	5,7	5,2
Pitch line differential	$a$	0,686	0,686
Root radius	$r_r$	0,95	0,8
Tip radius	$r_a$	0,95	0,8
Tooth height	$h_t$	3,53	2,95
Tooth width	$S$	6,19	5,2
Tooth radius	$R$	6,19	5,2

## 5.5 Belt pitch length and tolerances

Belt pitch length is defined by the number of teeth multiplied by tooth pitch,  $p_b$ . The belt pitch length,  $L_p$ , shall be agreed between the parties concerned. Pitch length tolerances are given in table 5.

**Table 5 — Pitch length tolerances**

Dimensions and tolerances in millimetres

Pitch length	
Range	Tolerance
$L_p \leq 381$	$\pm 0,45$
$382 \leq L_p \leq 505$	$\pm 0,5$
$506 \leq L_p \leq 762$	$\pm 0,6$
$763 \leq L_p \leq 991$	$\pm 0,65$
$992 \leq L_p \leq 1\ 220$	$\pm 0,75$
$1\ 221 \leq L_p \leq 1\ 524$	$\pm 0,8$
$1\ 525 \leq L_p \leq 1\ 782$	$\pm 0,85$
$1\ 783 \leq L_p \leq 2\ 030$	$\pm 0,9$
$2\ 031 \leq L_p \leq 2\ 286$	$\pm 0,95$
$2\ 287 \leq L_p \leq 2\ 544$	$\pm 1$

## 5.6 Belt widths and tolerances

The belt width,  $b_s$ , shall be agreed between the parties concerned. Width tolerances are given in table 6.

**Table 6 — Width tolerances**

Dimensions and tolerances in millimetres

Range	Width, $b_s$	
	Tolerance	
	Pitch length	
	$L_p < 840$	$L_p \geq 840$
$b_s < 40$	$\pm 0,8$	$\pm 0,8$
$b_s \geq 40$	$\pm 0,8$	+ 0,8 - 1,3

NOTE — For special applications, smaller tolerances may be used.

## 6 Pitch length measurement

### 6.1 Measuring fixture

The pitch length of a synchronous belt shall be determined by placing the belt on a measuring fixture composed of the following elements. (See figure 5.)



**6.1.1 Two pulleys of equal diameter**, as specified in table 7 and ISO 9011 of the proper belt type and having standard tooth space dimensions. These pulleys should be made to the tolerances shown in table 7 and tables 8, 9 or 10, as appropriate. One pulley shall be free to rotate on a fixed-position shaft, while the other shall be free to rotate on a movable shaft to permit the centre distance to change.

**6.1.2 Means of applying a total measuring force** to the movable pulley.

**6.1.3 Means of measuring the centre distance** between the two pulleys with the necessary degree of accuracy to check the allowed tolerances (tolerances for centre distance measurement should be one-half of the allowed length tolerances in table 5).

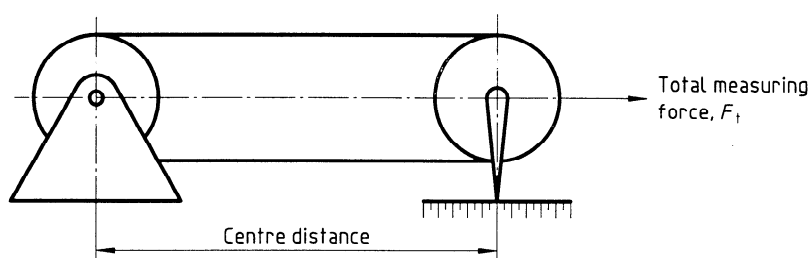


Figure 5 — Pitch length measuring fixture

Table 7 — Belt pitch length measuring pulleys

Dimensions and tolerances in millimetres

Belt type	Number of teeth $z$	Pitch circumference $p_b \times z$	Outside diameter $d_o$	Runout		$2a$
				radial	axial	
<b>ZA, ZB, ZH, ZS</b>	20	190,5	$59,266 \pm 0,013$	0,013	0,025	1,372
<b>YH, YS</b>	22	176	$54,651 \pm 0,013$	0,013	0,025	1,372
<b>ZR</b>	20	190,5	$59,138 \pm 0,013$	0,013	0,025	1,5
<b>YR</b>	22	176	$54,522 \pm 0,013$	0,013	0,025	1,5

NOTE — Pulleys of other diameters may be used provided that the diameters of the two pulleys are equal and that they are larger than those specified in table 7.

### 6.2 Total measuring force

The total measuring force,  $F_t$ , to be applied for measuring belts shall be calculated as follows:

- Types ZA, ZB, ZH, YH, ZR and YR:

$$F_t = (b_s \times 29) - 100$$

- Types ZS and YS:

$$F_t = 1\,020 \times (b_s/25)^{1,14}$$

where

$b_s$  is the width in millimetres;

$F_t$  is the total force, in newtons.

### 6.3 Procedure

When measuring the pitch length of a synchronous belt, the belt should be rotated at least two revolutions to seat it properly and to divide the total force equally between the two strands of the belt.

The pitch length shall be calculated by adding the pitch circumference of one of the pulleys to twice the measured centre distance.

### 6.4 Dimensions and clearance between measuring pulley and belt, and measuring pulley grooves

See figures 6 to 11 and tables 8 to 11.

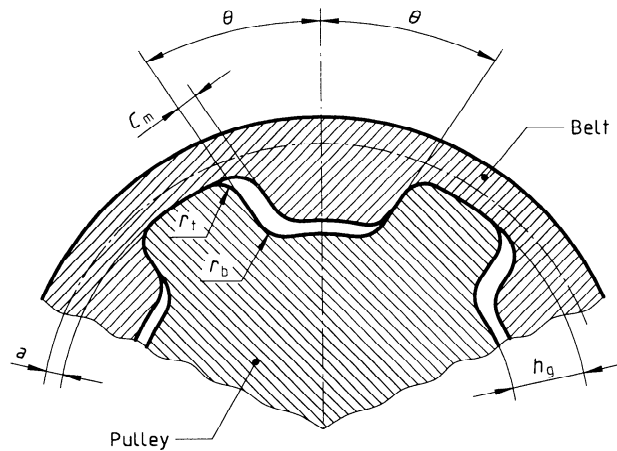


Figure 6 — Dimensions and clearance between measuring pulley and belt for types ZA and ZB (see table 8)

Table 8 — Dimensions of measuring pulley grooves for types ZA and ZB (see figure 6)

Dimensions in millimetres, angle in degrees

Type	Minimum clearance $C_m$	$h_g$	$r_b$	$r_t$	$\theta$	$a$
ZA	0,33	$2,68 \pm 0,1$	$0,85 \pm 0,1$	$0,85 \pm 0,1$	$20 \pm 1,5$	0,686
ZB	0,38	$3 \pm 0,1$	$1,23 \pm 0,1$	$1,23 \pm 0,1$	$20 \pm 1,5$	0,686

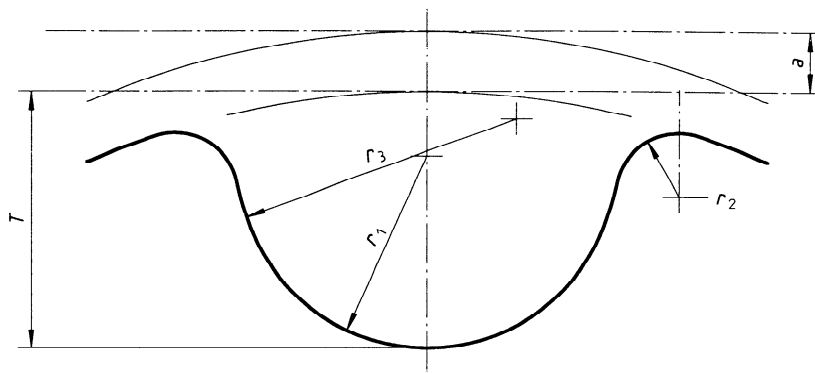


Figure 7 — Measuring pulley grooves for types ZH and YH (see table 9)

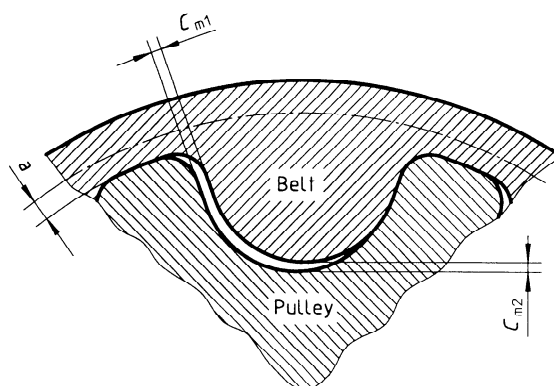


Figure 8 — Clearance between measuring pulley and belt types ZH and YH (see table 9)

Table 9 — Dimensions of measuring pulley grooves for types ZH and YH (see figures 7 and 8)

Dimensions in millimetres

Type	$a$	Minimum clearance		$r_1$ $\pm 0,05$	$r_2$ $\pm 0,05$	$r_3$ $\pm 0,05$	$T$ $\pm 0,05$
		$C_{m1}$	$C_{m2}$				
ZH	0,686	0,34	0,11	2,78	0,89	— <sup>1)</sup>	3,61
YH	0,686	0,3	0,11	2,22	0,69	3,45	3,16

1) Blend radius  $r_3$  is not used on ZH section.

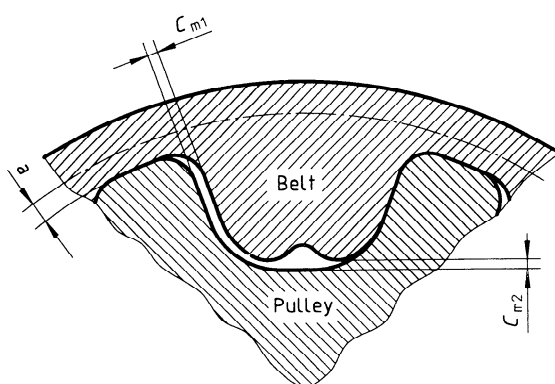


Figure 9 — Clearance between measuring pulley and belt types ZR and YR (see table 10)

Table 10 — Clearance between measuring pulley and belt types ZR and YR (see figure 9)

Dimensions in millimetres

Type	Number of teeth $z$	Minimum clearance		$a$
		$C_{m1}$	$C_{m2}$	
ZR	20	0,34	0,11	0,75
YR	22	0,3	0,11	0,75

NOTE — The pulley groove profile dimensions are determined by the generating tool rack described in ISO 9011:1997, figure 5 and table 3.

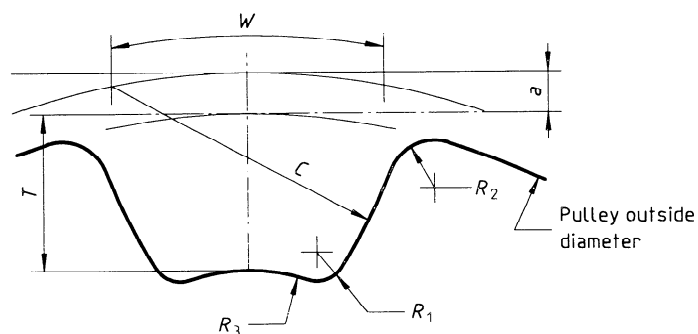


Figure 10 — Measuring pulley grooves for types ZS and YS (see table 11)

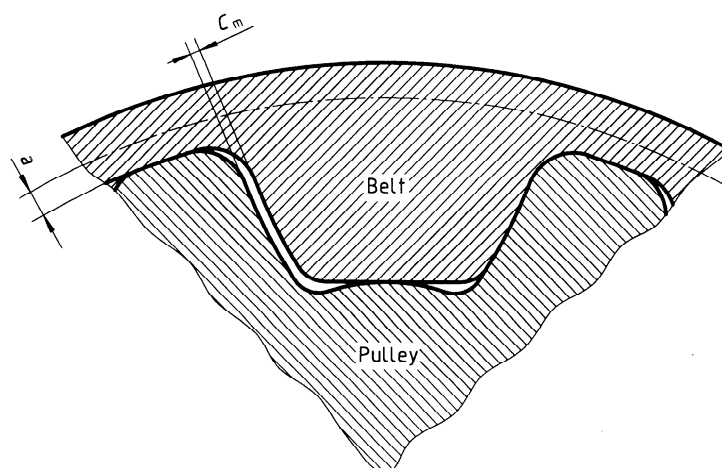


Figure 11 — Clearance between measuring pulley and belt for types ZS and YS (see table 11)

Table 11 — Dimensions of measuring pulley grooves for types ZS and YS (see figures 10 and 11)

Dimensions in millimetres

Type	$a$	Minimum clearance $C_m$	$W$ $+0,1$ $0$	$C$ $+0,1$ $0$	$T$ $\pm 0,03$	$R_1$ $\pm 0,05$	$R_2$ $+0,05$ $0$	$R_3$ $\pm 0,05$
ZS	0,686	0,2	6,19	6,31	3,37	0,48	0,89	4,81
YS	0,686	0,24	5,2	5,3	2,83	0,4	0,75	4,04

## 7 Lateral runout measurement

### 7.1 Fixture

#### 7.1.1 Belt

The lateral run out of a synchronous belt shall be measured using the same machine described in clause 6 and shown in figure 5. The total force shall be as specified in 6.2.

#### 7.1.2 Pulleys

The number of grooves and groove dimensions shall be as specified in 6.1.1 and table 7 for pitch length measuring.

The fixed position pulley (driving pulley) shall be flanged on both sides. The width between flanges shall be at least 2 mm wider than the belt being measured. The movable pulley shall be unflanged and of width at least 25 mm wider than the flanged pulley face. (See figure 12.)

### 7.2 Measuring device

Sensors of either mechanical or optical type are positioned at a point 125 mm from the centreline of the unflanged pulley and on the strand of the belt entering the unflanged pulley. A single sensor may be used or sensors may be placed on each side of the belt.

NOTE — Belts of 690 mm length or shorter may require optional sensor location as agreed between customer and supplier.

### 7.3 Procedure

Place the belt on the measuring device as shown in figure 12 with the label as shown, readable from the front of the fixture.

Position the sensor(s) at the edge of the belt at a position of 125 mm from the centreline of the unflanged, movable pulley. Rotate the belt clockwise at least two revolutions after reaching a stable position against a flange.

As the belt rotates the edge of the belt moves axially with respect of the sensor(s). The lateral runout is measured at the sensor on the edge of the belt which is in contact with the flange.

### 7.4 Results

The sensor shall measure full indicator movement (FIM) and shall be manually or automatically recorded to the nearest 0,1 mm. This measurement method provides a single lateral runout measurement for the belt.

NOTE — It should be understood that the reading which is taken as lateral runout is a combination of the static or dimensional characteristic "width variation" and the dynamic characteristic "lateral runout". Values should be agreed upon between customer and supplier.

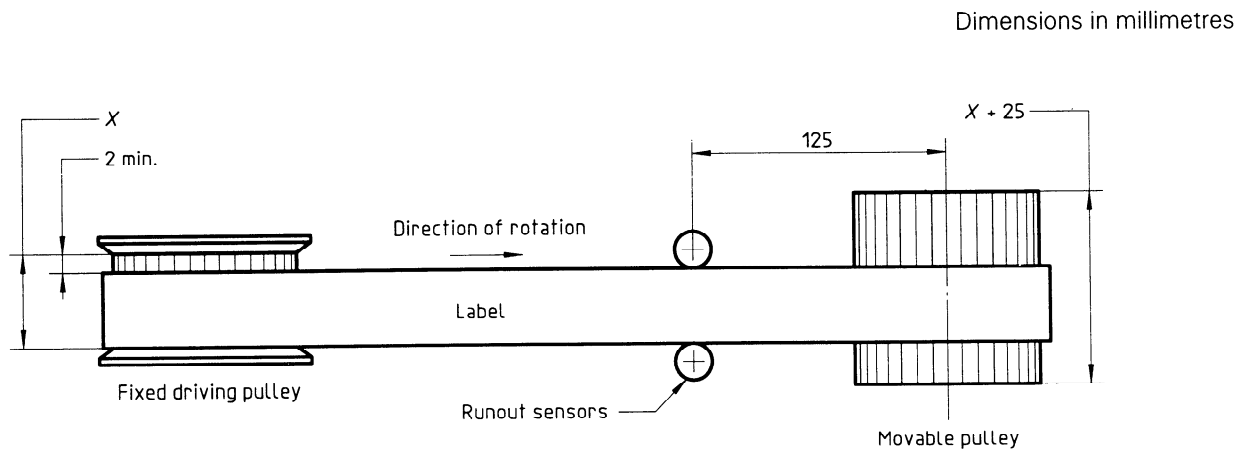


Figure 12 — Lateral runout measuring fixture (top view)

**NATIONAL ANNEX A**  
*(National Foreword)*

**A-1 BIS CERTIFICATION MARKING**

**A-1.1** The product may also be marked with the Standard Mark.

**A-1.2** The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the rules and regulations made thereunder. The details of conditions under which the license for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.





## Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

### Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

### Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards : Monthly Additions'.

This Indian Standard has been developed from Doc No.: PGD 33 (1421).

### Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

### BUREAU OF INDIAN STANDARDS

#### Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002  
Telephones : 2323 0131, 2323 3375, 2323 9402      Website: www.bis.org.in

#### Regional Offices:

	Telephones
Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110002	{ 2323 7617 2323 3841
Eastern : 1/14 C.I.T. Scheme VII M, V. I. P. Road, Kankurgachi KOLKATA 700054	{ 2337 8499, 2337 8561 2337 8626, 2337 9120
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, CHANDIGARH 160019	{ 26 50206 265 0290
Southern : C.I.T. Campus, IV Cross Road, CHENNAI 600113	{ 2254 1216, 2254 1442 2254 2519, 2254 2315
Western : Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400093	{ 2832 9295, 2832 7858 2832 7891, 2832 7892

**Branches:** AHMEDABAD. BENGALURU. BHOPAL. BHUBANESHWAR. COIMBATORE.  
DEHRADUN. DURGAPUR. FARIDABAD. GHAZIABAD. GUWAHATI.  
HYDERABAD. JAIPUR. JAMMU. JAMSHEDPUR. KOCHI. LUCKNOW. NAGPUR.  
PARWANOO. PATNA. PUNE. RAIPUR. RAJKOT. VISAKHAPATNAM.