

कृषि ट्रैक्टरों और पावर टिलर के लिए
स्पार्क अरेस्टर — परीक्षण पद्धतियाँ
(पहला पुनरीक्षण)

Spark Arrester for Agricultural
Tractors and Power Tillers —
Methods of Test
(First Revision)

ICS 65.060.01

© BIS 2024



भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS
मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI - 110002
www.bis.gov.in www.standardsbis.in

FOREWORD

This Indian Standard (First Revision) was adopted by the Bureau of Indian Standards, after the draft finalized by the Agricultural Machinery and Equipment Sectional Committee had been approved by the Food and Agriculture Division Council.

While using the tractors for harvesting, threshing and transportation of dry agricultural material, it has been observed that glowing carbon particles coming out from the exhaust silencer, create fire hazards. In order to arrest these glowing carbon particles, spark arresters are used in tractors and power tillers. To streamline methods for evaluation of these spark arresters, the standard was published in 1986 based on SAE J350.1980 'Spark arrester test procedure for medium size engine' published by Society of Automotive Engineers' USA. In formulation of the standard, assistance was also derived from Central Farm Machinery Training and Testing Institute, Budni and Northern Region Farm Machinery Training and Testing Institute, Hissar.

The standard primarily covers the methods of test for evaluation of spark arrester for agricultural tractors and power tillers, however the methods may also be used for other powered equipment like combine harvester.

The revision of this standard has been brought out to incorporate the amendment issued to the earlier version with necessary editorial corrections and to bring it in the latest style and format of Indian Standards. Referred Indian Standard has also been updated.

The composition of the Committee responsible for the formulation of this standard is given in [Annex C](#).

In reporting the results of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS 2 : 2022 'Rules for rounding off numerical values (*second revision*)'.

*Indian Standard***SPARK ARRESTER FOR AGRICULTURAL TRACTORS AND
POWER TILLERS — TEST METHODS***(First Revision)***1 SCOPE**

This standard covers **methods of tests** for spark arresters fitted on engines used for agricultural tractors and power tillers.

2 REFERENCE

This standard given below contain provision which, through reference in this text, constitute provisions of this standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent edition of this standard:

<i>IS No.</i>	<i>Title</i>
IS 4905 : 2015/ ISO 24153 : 2009	Random sampling and randomization procedures (<i>first revision</i>)

3 TERMINOLOGY

3.0 For the purpose of this standard, the following definitions shall apply.

3.1 Agricultural Tractors — A self-propelled wheeled vehicle having two axles, or a track-laying or semi-track-laying machine, more particularly designed to pull, push, carry and operate implements and machines used for agricultural work (including forestry work).

3.2 Spark Arrester — A device fitted with the exhaust system of an engine to arrest the glowing carbon particles.

4 SELECTION AND GENERAL REQUIREMENTS**4.1 Selection**

The spark arrester shall be selected at random (*see* IS 4905) from the production lot by a representative of testing authority. However, in case of prototype, the sample shall be submitted directly

to the testing authority. The spark arrester shall be complete in all respects.

4.2 Specification

The applicant manufacturer shall supply specifications of the spark arrester as per [Annex A](#) as well as any further technical details as may be required to carry out the test. A line sketch should be provided by the manufacturer/applicant giving the details of the specification.

5 RUNNING IN AND CHECKING OF SPECIFICATION**5.1 Running in**

The spark arrester shall be run-in as per schedule and duration specified by the applicant/manufacturer.

5.2 Checking of Specifications

The information given by the manufacturer/applicant in the specification sheet as per [Annex A](#) shall be verified by the testing authority and reported.

6 TESTS**6.1 General**

6.1.1 The tests shall be conducted under laboratory conditions with air. The spark arrester shall be tested at flows creating back pressure up to 6.8 kPa. If the spark arrester is considered for back pressure above 6.8 kPa, additional testing may be carried out at the higher flow rate necessary to develop the actual maximum back pressure.

6.1.2 Test Equipment

The test unit consists of a suitable blower with air directed through the metering instruments, spark arrester, and a positive trap for collecting particles. The apparatus shall permit mounting of arresters in all positions in which they may be used and shall


To access Indian Standards click on the link below:

https://www.services.bis.gov.in/php/BIS_2.0/bisconnect/knowyourstandards/Indian_standards/isdetails/

discharge into the positive trap in a manner similar to that shown in Fig. 1.

The measuring apparatus shall be such that the following items have the tolerances within the limits shown against each:

- | | | | |
|----------------------------|---------------|--|---------------|
| a) Rotational speed, r/min | ± 0.5 percent | e) Mass, kg | ± 0.5 percent |
| b) Time, s | ± 0.2 s | f) Atmospheric pressure, kPa | ± 0.2 kPa |
| c) Distance, m or mm | ± 0.5 percent | g) Hydraulic pressure, kPa | ± 2.0 percent |
| d) Force, N and torque, Nm | ± 1.0 percent | h) Temperature of fuels, etc, °C | ± 2 °C |
| | | j) Temperature readings of wet and dry bulb thermometers, °C | ± 0.5 °C |

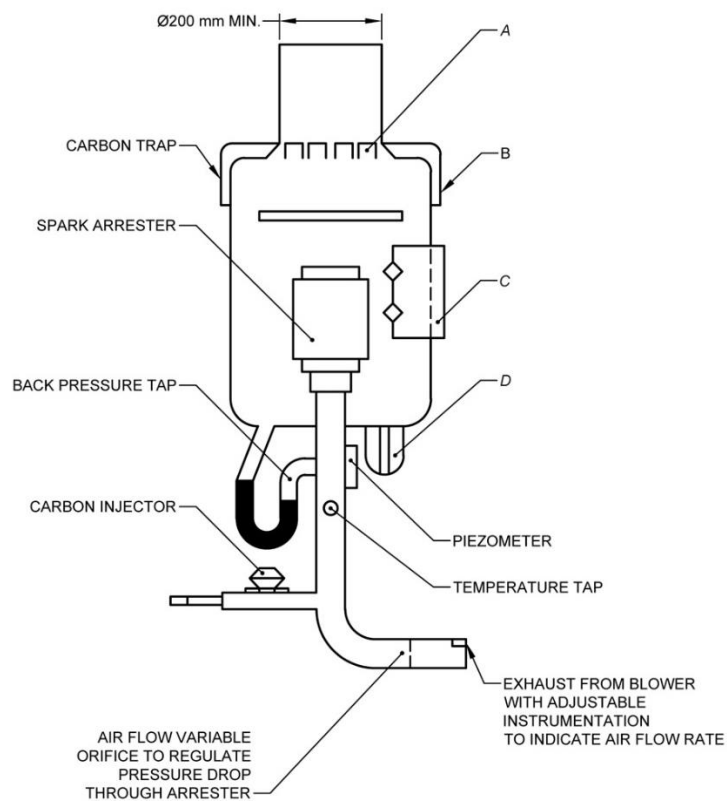

key

- A — Diameter should be large enough to ensure negligible back pressure at maximum air flow screen (IS sieve 600 micron opening)
- B — Soft target (optional), plywood or equivalent, to be used when necessary to prevent carbon from being pulverized through the screen and shall be capable of being thoroughly cleaned, if used
- C — Air tight access hatch to permit clean sweep down of all material collected (optional)
- D — Trap for removal of carbon passed through arrester

FIG. 1 TEST APPARATUS FOR MEASURING SPARK ARRESTER EFFICIENCY

6.1.3 Test Carbon

The test carbon used shall conform to the following specifications:

<i>Sl No.</i>	<i>Type of Carbon</i>	<i>IS Sieve No.</i>	<i>Percent Retained</i>
(1)	(2)	(3)	(4)
i)	Fine carbon	1.40 mm	0 to 5
		1.18 mm	10 to 30
		850 mm	50 to 70
		600 mm	0 to 25
ii)	Coarse carbon	2.36 mm	0 to 10
		1.70 mm	40 to 60
		1.18 mm	30 to 40
		850 mm	0 to 10

The test carbon shall be petroleum coke and once used may not be used for further tests.

6.1.4 Carbon Injection Mechanism

The test carbon shall be injected by a feeder mechanism that shall not crush or grind the material, nor shall it unduly affect the normal flow of air through the apparatus. It shall be located approximately as shown in [Fig. 1](#).

6.1.5 Differential Pressure

The test equipment as shown in [Fig. 1](#) shall be equipped with a piezometer ring or other device for monitoring pressure to the arrester. The differential pressure shall be measured with a manometer between the piezometer and the pressure tap on the discharge side of the arrester. A piezometer calibration run should be made over the anticipated airflow range with no spark arrester in place. The indicated pressure recorded should be plotted and the resulting calibration curve should be used to correct data recorded during subsequent tests on the same spark arrester. At each test point, the flow rate through the arrester shall be held constant during the carbon feed cycle.

6.2 Test Procedure

6.2.1 The test equipment shall be arranged in a general configuration similar to that shown in [Fig. 1](#). The inlet duct shall be of proper size to fit the arrester as in normal installation.

6.2.2 The following checks can be made with no spark arrester by using a straight pipe equal in length and inlet diameter to that of the test arrester:

- System pressure with maximum expected air delivery down to 10 percent of flow which occurs at 6.8 kPa; and
- Pulverization caused by injection and/or positive test trap for the highest flow point.

NOTE — The outlet screen shall have sufficient cross-sectional area to maintain minimum back pressure in the test apparatus discharge.

6.2.3 The amount of test carbon to be used at each test condition shall be 6 times the flow rate in l/min at 6.8 kPa back pressure with a minimum test sample of 25 g and a maximum test sample of 200 g. The flow rate shall be determined with the test arrester in place.

6.2.4 The test carbon shall be fed into the air stream at a uniform rate over a period of 15 min. A tolerance of 5 min may be allowed.

6.2.5 The observations shall be recorded separately for each size of test carbon, that is, fine and coarse at five evenly spaced air flow rates from the flow at which the spark arrester creates a differential pressure of 6.8 kPa and down to 10 percent of this flow. The observation may be recorded at higher flow rate also if the spark arrester applications indicate a need for it.

6.2.6 Following observations shall be recorded for each flow rate:

- Mass of test sample carbon (W_s) for both coarse carbon and fine test carbon;
- Mass of carbon in the positive trap that is retained on a 600-micron IS sieve (W_t) for each individual run both for coarse and fine test carbon;
- Air flow at the test conditions;
- Air temperature at spark arrester inlet;
- Pressure in the system without the spark arrester installed at air flow rates specified under [6.2.5](#) (P_1);
- Pressure in the system with the spark arrester installed (P_2); and
- Differential pressure induced by the spark arrester $P_a = (P_2 - P_1)$.

7 COMPUTATIONS OF TEST RESULTS

7.1 Spark Arresting Efficiency

$$\mu = \frac{W_s \times W_t}{W_s} \times 100$$

where

μ = spark arresting efficiency, percent; and

W_s and W_t = as defined under in [6.2.6](#).

7.2 Gas Flow

The gas flow can be computed by the formula given below:

$$Q = W_m \times \frac{1}{V} = W_m \times \frac{T}{3.49 \times P}$$

where

Q = flow, dm³/s;

W_m = rate of air flow determined by standard laboratory instrumentation or as specified by the manufacturer, g/s;

V = specific mass, g/m³;

T = gas temperature to spark arrester, °K; and

P = gas pressure to the spark arrester, kPa.

7.3 Presentation of Test Results

The test results shall be presented in a form as given in [Annex B](#). The results shall also be presented graphically as shown in [Fig. 2](#). In general, all tests will be carried out to a flow at which the differential pressure induced is 6.8 kPa. However, the tests can be carried out to gr eater flows if the necessity arises. Curves of arresting efficiency and differential pressure will be presented as shown in [Fig. 2](#).

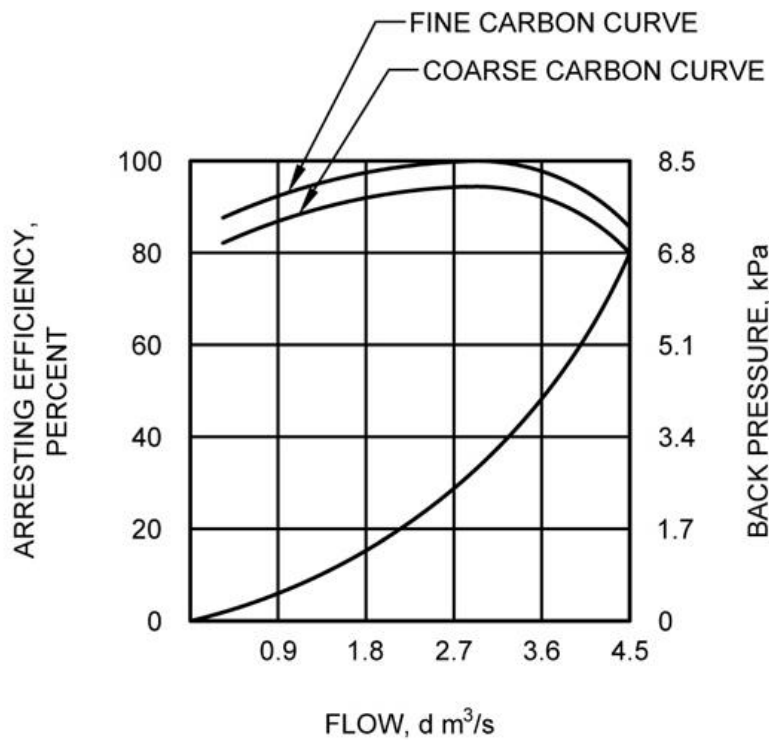


FIG. 2 PERFORMANCE OF SPARK ARRESTER UNDER LABORATORY TEST WITH AIR

ANNEX A

(Clauses [4.2](#) and [5.2](#))

SPECIFICATION SHEET

To be filled in by

Manufacturer

Testing institute

A-1 GENERAL

- a) Make
- b) Model
- c) Type

A-2 DRUM

- a) Construction
- b) Inner diameter, mm
- c) Thickness of sheet, mm
- d) Height, mm

A-3 SEPARATOR

- a) Construction
- b) Number of slots
- c) Length of slot (radial), mm
- d) Opening of slots, mm
 - 1) At inner end
 - 2) At outer end

A-4 INLET

- a) Construction
- b) Inner diameter, mm
- c) Thickness of sheet, mm

A-5 OUTLET

- a) Construction
- b) Inner diameter, mm
- c) Length, mm
- d) Thickness of sheet, mm

A-6 OVERALL DIMENSIONS

- a) Height, mm
- b) Diameter, mm

A-7 MASS, kg

NOTE — A line sketch shall be provided by the manufacturer/applicant detailing the specification.

ANNEX B

(Clause [7.3](#))

DATA SHEET FOR LABORATORY TEST WITH AIR

B-1 DATE OF TEST

B-2 PLACE OF TEST

B-3 DURATION OF TEST

B-4 ATMOSPHERIC CONDITIONS

- a) Temperature °C
- b) Pressure, kPa
- c) Relative humidity, percent

B-5 TEST DATA

Sl No.	Air Flow, dm ³ /s (Q)	Air Temperature, °K (T)	Test Carbon Size		Differential Back Pressure Induced by the Spark Arrester, kPa			Spark Arresting Efficiency, percent			Remark
			Designation	Average Particle Size, mm	Pressure without Spark Arrester (P ₁)	Pressure with Spark Arrester (P ₂)	Induced Pressure (P _a = P ₂ - P ₁)	Mass of Test Sample (W _s)	Mass of Carbon in the Positive Trap (W _t)	Efficiency (μ) = $\frac{(W_s - W_t)}{W_s} \times 100$	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)
			Fine								
			Coarse								

ANNEX C

(Foreword)

COMMITTEE COMPOSITION

Agricultural Machinery and Equipment Sectional Committee, FAD 11

<i>Organization</i>	<i>Representative(s)</i>
ICAR - Central Institute of Agricultural Engineering, Bhopal	DR C. R. MEHTA (<i>Chairperson</i>)
Agricultural Machinery Manufacturers Association (AMMA-India), Gandhinagar	DR SURENDRA SINGH SHRI MITUL PANCHAL (<i>Alternate</i>)
All India Coordinated Research Project on Mechanization of Animal Husbandary, Bhopal	DR S. P. SINGH
All India Farmers Alliance, New Delhi	DR RAJARAM TRIPATHI SHRIMATI APURVA TRIPATHI (<i>Alternate</i>)
Aspee Agro Equipment Private Limited, Mumbai	SHRI JATIN S. PATEL SHRI GANGADHAR VARPE (<i>Alternate</i>)
Automotive Research Association of India, Pune	SHRI A. AKBAR BADUSHA SHRI GIRISH TANAWADE (<i>Alternate I</i>) SHRI GANGARAM AUTI (<i>Alternate II</i>)
CCS Haryana Agricultural University, Hisar	DR VIJAYA RANI
Central Farm Machinery Training and Testing Institute, Budni	SHRI ANIL KUMAR UPADHYAY SHRI BABUL NATH DIXIT (<i>Alternate I</i>) SHRI PARTH LODH (<i>Alternate II</i>)
CLAAS India Private Limited, Chandigarh	SHRI KRISHNA PRABHAKAR SINGH
CNH Industrial India Private Limited, Pune	SHRI SANTHOSH RAO SHRI SUJIT HINGE (<i>Alternate</i>)
Consumer Guidance Society of India, Mumbai	SHRI SITARAM DIXIT
Dasmesh Mechanical Works Private Limited, Malerkotla	SHRI SARBJEET SINGH PANESAR SHRI GURDEEP SINGH PANESAR (<i>Alternate</i>)
ICAR - All India Coordinated Research Project on Ergonomics and Safety in Agriculture, Bhopal	DR SUKHBIR SINGH DR RAHUL R. POTDAR (<i>Alternate I</i>) SHRIMATI SWEETI KUMARI (<i>Alternate II</i>)
ICAR - All India Coordinated Research Project on Farm Implements and Machinery, Bhopal	DR K. N. AGRAWAL
ICAR - Central Institute of Agricultural Engineering, Bhopal	DR V. P. CHAUDHARY DR U. R. BADEGAONKAR (<i>Alternate I</i>) DR DILIP JAT (<i>Alternate II</i>)
Indian Council of Agricultural Research, New Delhi	DR PANNA LAL SINGH
John Deere India Private Limited, Pune	SHRI ANAND RAJ SHRI CHANDRASHEKHAR DESHMUKH (<i>Alternate I</i>) SHRI PRATIK DURAPHE (<i>Alternate II</i>)
Kerala Agro Machinery Corporation Ltd (KAMCO), Athani	SHRI A. UNNIKRISHNAN SHRI P. C. SAJIMON (<i>Alternate</i>)
KisanKraft Limited, Bangaluru	SHRI RAVINDRA AGARWAL SHRI ANKIT CHITALIA (<i>Alternate I</i>) SHRI SUNIL PRASAD (<i>Alternate II</i>)

<i>Organization</i>	<i>Representative(s)</i>
Kubota Agricultural Machinery India Private Limited, Faridabad	SHRI ASHOK KUMAR SHRI ASHISH KUMAR MALLARH (<i>Alternate</i>)
Maharana Pratap University of Agricultural and Technology, Udaipur	DR SANWAL SINGH MEENA
Mahatma Phule Krishi Vidyapeeth, Rahuri	DR SACHIN MADHUKAR NALAWADE SHRI VIKRAM PARASHARAM KAD (<i>Alternate I</i>) DR AVDHUT ASHOK WALUN (<i>Alternate II</i>)
Mahindra and Mahindra Limited, Mumbai	SHRI PRADEEP SHINDE
Ministry of Agriculture, Department of Agriculture, New Delhi	DR V. N. KALE SHRI ARVIND N. MESHRAM (<i>Alternate</i>)
National Innovation Foundation, New Delhi	SHRI RAKESH MAHESHWARI SHRI MAHESH PATEL (<i>Alternate</i>)
National Institute of Plant Health Management, Hyderabad	DR VIDHU KAMPURATH P. SHRI MUTYALA UDAYA (<i>Alternate</i>)
North Eastern Region Farm Machinery Training and Testing Institute, Biswanath Chariali	DR P. P. RAO SHRI S. G. PAWAR (<i>Alternate I</i>) SHRI KHAGENDRA BORA (<i>Alternate II</i>)
Northern Region Farm Machinery Training and Testing Institute, Hisar	DR MUKESH JAIN SHRI SANJAY KUMAR (<i>Alternate</i>)
Power Tillers Manufacturers Association, Kolkata	SHRI A. R. GANESH KUMAR
Punjab Agricultural University, Ludhiana	DR MAHESH KUMAR NARANG DR RAJESH GOYAL (<i>Alternate I</i>) SHRI APOORV PRAKASH (<i>Alternate II</i>)
Southern Region Farm Machinery Training and Testing Institute, Anantpur	DR B. M. NANDEDE
Tamil Nadu Agricultural University, Coimbatore	DR R. KAVITHA DR A. SURENDRA KUMAR (<i>Alternate I</i>) DR A. P. MOHAN KUMAR (<i>Alternate II</i>)
Tirth Agro Technology Private Limited 'Shaktiman', Rajkot	SHRI PARAG DEVIDAS BADGUJAR SHRI V. AUDHI NARAYAN REDDY (<i>Alternate</i>)
Tractor and Mechanization Association, New Delhi	SHRI PHILIP KOSHY SHRI VEENIT NEGI (<i>Alternate I</i>) SHRIMATI DEVYANI (<i>Alternate II</i>)
Tube Investments Clean Mobility Private Limited, Chennai	SHRI ABHISHEK SINHA SHRI S. O. TYAGI (<i>Alternate</i>)
Voluntary Organisation in Interest of Consumer Education (VOICE), New Delhi	SHRI B. K. MUKHOPADHYAY
In Personal Capacity (201, Memnon Tower, Omaxe the Nile, Sector 49, Sohna Road, Gurugram - 122018)	SHRI VIVEK GUPTA
BIS Directorate General	SHRIMATI SUNEETI TOTEJA, SCIENTIST 'F'/SENIOR DIRECTOR AND HEAD (FOOD AND AGRICULTURE) [REPRESENTING DIRECTOR GENERAL (<i>Ex-officio</i>)]

Member Secretary
SHRI VIKRANT CHAUHAN
SCIENTIST 'B'/ASSISTANT DIRECTOR
(FOOD AND AGRICULTURE), BIS

Panel to Formulate and Review Indian Standards on Tractors Panel FAD11/P 5

<i>Organization</i>	<i>Representative(s)</i>
ICAR - Central Institute of Agricultural Engineering, Bhopal	DR C. R. MEHTA (<i>Convener</i>)
Automotive Research Association of India, Pune	SHRI GIRISH TANAWADE
Central Farm Machinery Training and Testing Institute, Budni	SHRI A. K. UPADHYAY
CNH Industrial India Private Limited, Pune	SHRI HIMANSHU MISHRA
John Deere India Private Limited, Pune	SHRI MANSINGH JAGDALE
Kubota Agricultural Machinery India Private Limited, Faridabad	SHRI ASHISH KUMAR MALLARH
Mahindra and Mahindra Limited, Mumbai	SHRI PRADEEP SHINDE
Tractor and Mechanization Association, New Delhi	SHRI VEENIT NEGI
Tube Investments Clean Mobility Private Limited, Chennai	SHRI ABHISHEK SINHA
In Personal Capacity (201, Memmon Tower, Omaxe the Nile, Sector 49, Sohna Road, Gurugram - 122018)	SHRI VIVEK GUPTA

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 2016* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website-www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: FAD 11 (25072).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

	Telephones
Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002	{ 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091	{ 2367 0012 2320 9474
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019	{ 265 9930
Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113	{ 2254 1442 2254 1216
Western : 5 th Floor/MTNL CETTM Technology Street, Hiranandani Gardens, Powai, Mumbai - 400076	{ 25700030 25702715

Branches : AHMEDABAD, BENGALURU, BHOPAL, BHUBANESHWAR, CHANDIGARH, CHENNAI, COIMBATORE, DEHRADUN, DELHI, FARIDABAD, GHAZIABAD, GUWAHATI, HARYANA (CHANDIGARH), HUBLI, HYDERABAD, JAIPUR, JAMMU, JAMSHEDPUR, KOCHI, KOLKATA, LUCKNOW, MADURAI, MUMBAI, NAGPUR, NOIDA, PARWANOO, PATNA, PUNE, RAIPUR, RAJKOT, SURAT, VIJAYAWADA.