
खदान ढुलाई ट्रैक के लिए डॉग स्पाइक्स —
विशिष्टि
(पहला पुनरीक्षण)

**Dog Spikes for Mine Haulage
Tracks — Specification**
(*First Revision*)

ICS 73.100.01

© BIS 2024



भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS
मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI - 110002
www.bis.gov.in www.standardsbis.in

FOREWORD

This Indian Standard (First Revision) was adopted by the Bureau of Indian Standards, after the draft finalized by the Mining Techniques and Equipment Sectional Committee had been approved by the Mechanical Engineering Division Council.

This standard was first published in 1981. This standard is being revised to keep pace with the latest technological developments and international practices. Also, in this revision, the standard has been brought into the latest style and format of Indian Standards, and references of Indian Standards, wherever applicable have been updated. BIS certification marking clause has been modified to align with the revised *Bureau of Indian Standards Act, 2016*.

This standard lays down the requirements for dog spikes (also called dog nails) used in laying of mine haulage-tracks. This standard covers two types of dog spikes: a) a chisel shaped tail (Type C) and b) a rounded tail (Type R).

Of the two, the Type C dog spikes find greater use in Indian mines. These dog spikes are easily driven into the wooden sleeper and are easier to manufacture (may be manufactured in mine workshops). In addition, their use involves lesser damage to sleepers thus increasing the life of sleepers. Due to these advantages, the use of these dog spikes is recommended at places where track layout is frequently changed, high speeds are not involved, rails used are comparatively of lighter section and haulage tracks are not permanent in nature. These dog spikes are therefore, normally used for laying tracks near working faces, at places where locomotive haulage is not used, etc.

On the other hand, the Type R dog spikes, though not in demand, are recommended for use where track is comparatively of permanent nature, high speeds of vehicles are involved, locomotives are expected to run on the tracks and rails are of heavier section. These dog spikes are, therefore, preferred at trunk haulage routes, pit-bottom and pit-top layouts, etc.

For laying the haulage track, Type C dog spikes are driven directly into the sleeper by hammering the head whereas Type R dog spikes are driven into the sleeper after drilling a blind hole in the sleeper with an auger.

The composition of the Committee responsible for the formulation of this standard is given in [Annex A](#).

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 2022 'Rules for rounding off numerical values (*second revision*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

Indian Standard

DOG SPIKES FOR MINE HAULAGE TRACKS — SPECIFICATION

(*First Revision*)

1 SCOPE

This standard lays down the requirements for dog spikes (also called dog nails) for mine haulage and locomotive tracks.

2 REFERENCES

The standard listed below contains provisions which, through reference in this text, constitute provisions of this standard. At the time of publication, the edition indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most

recent edition of this standard:

<i>IS No.</i>	<i>Title</i>
IS 2062 : 2011	Hot rolled medium and high tensile structural steel — Specification (<i>seventh revision</i>)

3 TYPES

- a) *Type C* — Dog spike with chisel shaped tail; and
- b) *Type R* — Dog spike with rounded tail.

4 DIMENSIONS

4.1 Type C Dog Spikes (See [Fig. 1](#))

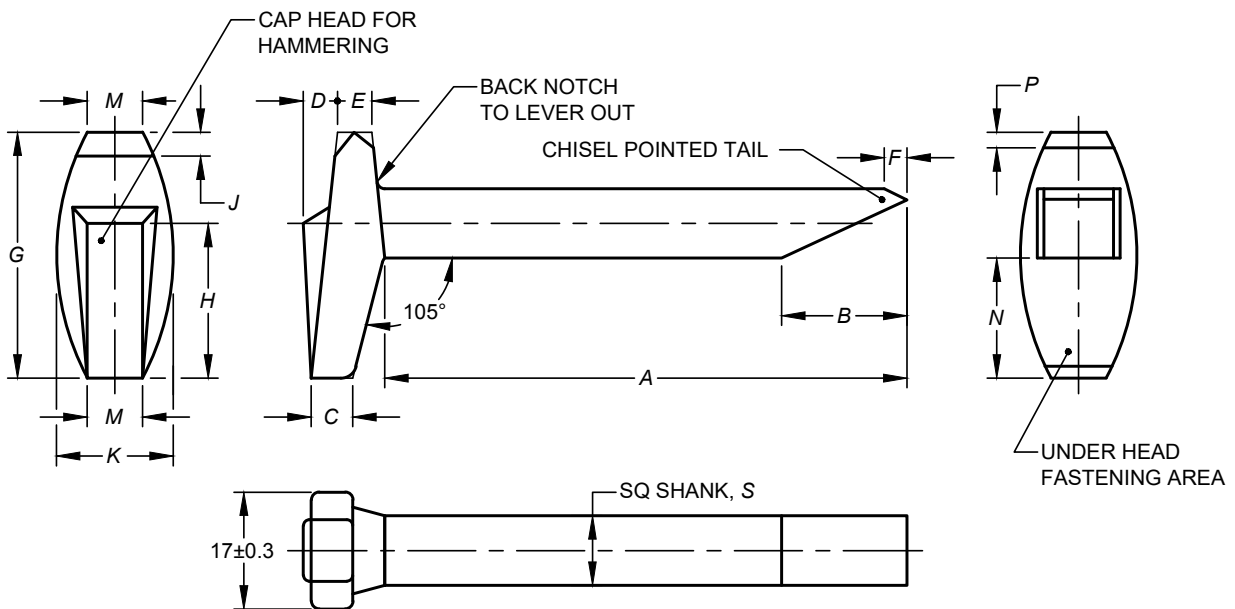



FIG. 1 TYPE C DOG SPIKES

All dimension in millimetres.

<i>Sl No.</i>	<i>Nominal Size</i>	<i>Size of Square Shank</i>	Length of Shank, A	B	C	D	E	F	G ±0.5	H	J	K	M, Min	N	P	Suitable for Rail Section kg/m
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)
i)	10 × 85	10	75 ± 0.5	18	6	5	5	3	35	22	3	17	8	17	2	10

Sl No.	Nominal Size	Size of Square Shank	Length of Shank, A	B	C	D	E	F	G ±0.5	H	J	K	M, Min	N	P	Suitable for Rail Section kg/m
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)
ii)	10 × 100	10	88 ± 1	18	8	5	7	3	35	22	3	17	8	17	2	10, 12
iii)	12 × 100	12	88 ± 1	22	8	5	7	8	42	26	5	22	10	20	3	10, 12, 15
iv)	12 × 15	12	102 ± 1	22	8	5	8	8	42	26	5	22	10	20	3	15, 24

4.2 Type R Dog Spikes (See [Fig. 2](#))

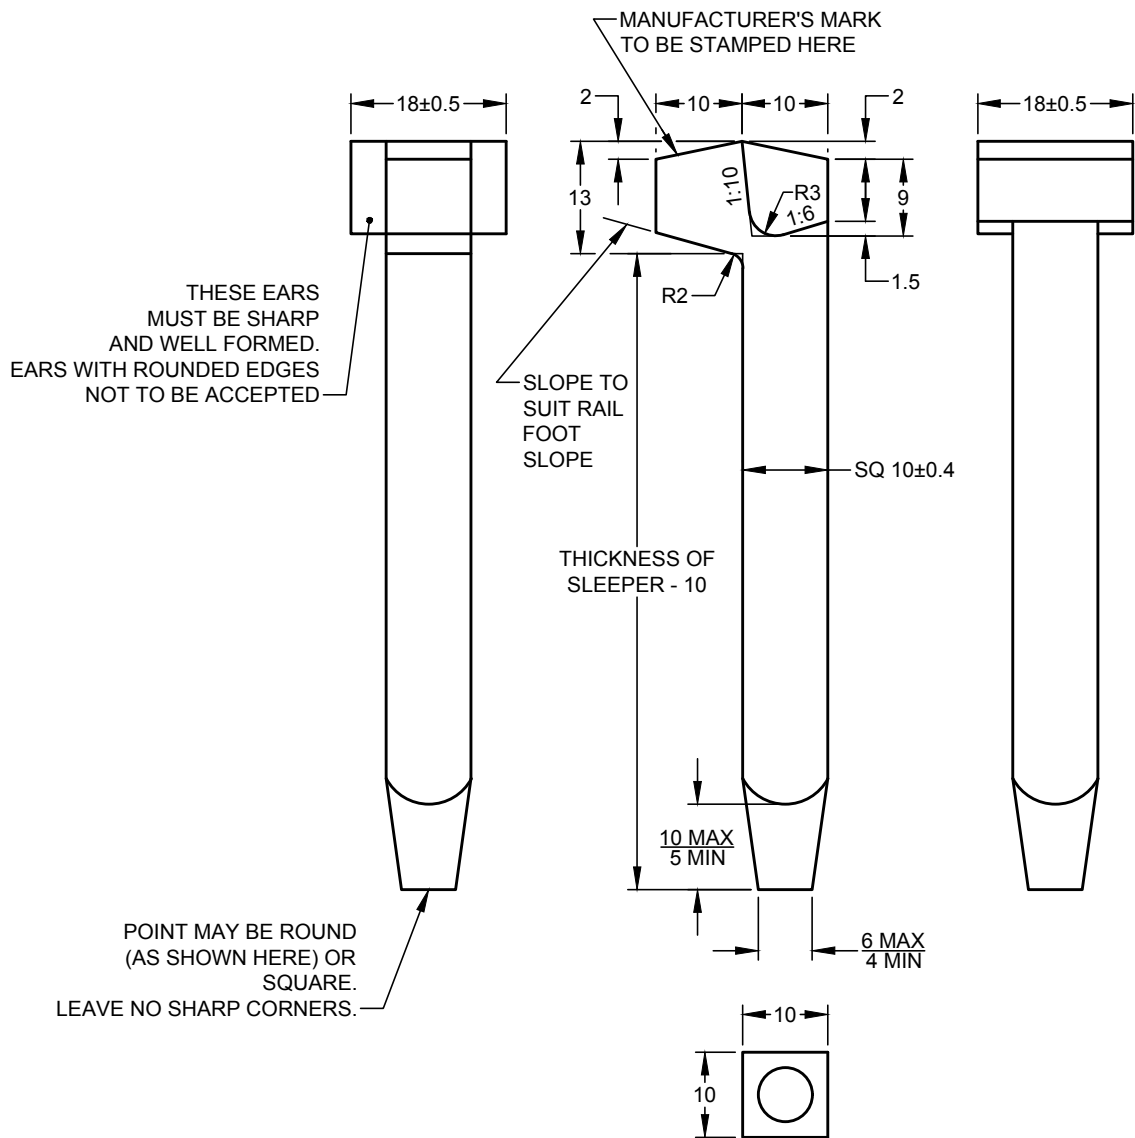

All dimension in millimeters.

FIG. 2 TYPE R DOG SPIKES

5 MATERIAL

Steel used shall be conforming to IS 2062.

6 DESIGNATION

Type C dog spikes of 12×100 nominal size conforming to this standard shall be designated as:

Dog Spike $12 \times 100C$ IS 10046

7 MARKING

Each spike shall be marked with manufacturer's

identification mark or trade-mark and nominal size.

7.1 BIS Certification Marking

The product(s) conforming to the requirements of this standard may be certified as per the conformity assessment schemes under the provisions of the *Bureau of Indian Standards Act, 2016* and the Rules and Regulations framed thereunder, and the products may be marked with the Standard Mark.

ANNEX A

(Foreword)

COMMITTEE COMPOSITION

Mining Techniques and Equipment Sectional Committee, MED 08

<i>Organization</i>	<i>Representative(s)</i>
Directorate General of Mines Safety, Dhanbad	SHRI SAIFULLAH ANSARI (<i>Chairperson</i>)
Automotive Research Association of India, Pune	SHRI MILIND KANDALKAR SHRI DHONDIRAM MOLE (<i>Alternate</i>)
BEML Limited, Bengaluru	SHRI V. R. S. PRASAD RAO SHRI H. G. SURESH (<i>Alternate</i>)
CSIR-Central Institute for Mining and Fuel Research, Dhanbad	DR MANOJ KUMAR SINGH SHRI SURAJIT DEY (<i>Alternate I</i>) PROF S. K. KASHYAP (<i>Alternate II</i>)
Directorate General of Mines Safety, Dhanbad	SHRI M. ARUMUGAM
Eastern Coalfields Limited, Dishergarh	SHRI SARVESH KUMAR SHRI AJAY BHOWMIK (<i>Alternate</i>)
Eimco Elecon (India) Limited, Vallabh Vidyanagar	SHRI RAM RAMESH KALE SHRI VINAY JAYNARAYAN SHARMA (<i>Alternate</i>)
Hutti Gold Mines Company Limited, Bengaluru	DR PRABHAKAR SANGOORMATH SHRI MALLIKARJUN SARAPUR (<i>Alternate I</i>) MS MEGA HIREMATH (<i>Alternate II</i>)
Indian Institute of Technology (ISM), Dhanbad	SHRI L. A. KUMARASWAMIDHAS
Manganese Ore Limited, Nagpur	SHRI RAKESH KUMAR VERMA SHRI ATUL SHARMA (<i>Alternate I</i>) SHRI ASHWINI BAGHELE (<i>Alternate II</i>)
Metso Outotec India Private Limited, Vadodara	SHRI SANDEEP DEOKISAN BHATTAD
Nanda Millar Company, Kolkata	SHRI J. P. GOENKA SHRI MADHUR GOENKA (<i>Alternate</i>)
Tata Steel Limited, Dhanbad	SHRI SOUMENDHU MANJHI SHRI ABINASH JHA (<i>Alternate</i>)
BIS Directorate General	SHRI K. VENKATESWARA RAO, SCIENTIST 'F'/SENIOR DIRECTOR AND HEAD (MECHANICAL) [REPRESENTING DIRECTOR GENERAL (<i>Ex-officio</i>)]

Member Secretary

SHRI SHUBHAM TIWARI
SCIENTIST 'D'/JOINT DIRECTOR
(MECHANICAL), BIS

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 2016* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website-www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: MED 08 (20458).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

Central : 601/A, Konnectus Tower -1, 6th Floor,
DMRC Building, Bhavbhuti Marg, New
Delhi 110002

Telephones

{ 2323 7617

Eastern : 8th Floor, Plot No 7/7 & 7/8, CP Block, Sector V,
Salt Lake, Kolkata, West Bengal 700091

{ 2367 0012
{ 2320 9474

Northern : Plot No. 4-A, Sector 27-B, Madhya Marg,
Chandigarh 160019

{ 265 9930

Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113

{ 2254 1442
{ 2254 1216

Western : 5th Floor/MTNL CETTM, Technology Street, Hiranandani Gardens,
Powai, Mumbai 400076

{ 2570 0030
{ 2570 2715

Branches : AHMEDABAD, BENGALURU, BHOPAL, BHUBANESHWAR, CHANDIGARH, CHENNAI, COIMBATORE, DEHRADUN, DELHI, FARIDABAD, GHAZIABAD, GUWAHATI, HARYANA (CHANDIGARH), HUBLI, HYDERABAD, JAIPUR, JAMMU, JAMSHEDPUR, KOCHI, KOLKATA, LUCKNOW, MADURAI, MUMBAI, NAGPUR, NOIDA, PARWANOO, PATNA, PUNE, RAIPUR, RAJKOT, SURAT, VIJAYAWADA.