चावल — धान और भूसी वाले चावल से संभावित मिलिंग उपज का निर्धारण

IS 18695 : 2024 ISO 6646 : 2011

Rice — Determination of the Potential Milling Yield from Paddy and from Husked Rice

ICS 67.060

© BIS 2024

© ISO 2011



भारतीय मानक ब्यूरो BUREAU OF INDIAN STANDARDS मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002 MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG NEW DELHI - 110002

www.bis.gov.in www.standardsbis.in

NATIONAL FOREWORD

This Indian Standard which is identical to ISO 6646: 2011 'Rice — Determination of the potential milling yield from paddy and from husked rice' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on recommendation of the Foodgrains, Allied Products and Other Agricultural Produce Sectional Committee and approval of the Food and Agriculture Division Council.

The text of ISO standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'; and
- b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards, which are to be substituted in their places, are listed below along with their degree of equivalence for the editions indicated:

ISO 712 Cereals and cereal products — Determination of moisture content — Routine reference method Corresponding Indian Standard Degree of Equivalence

ISO 712 Cereals and cereal products — Determination of Methods of analysis for foodgrains:

Part 2 Determination of moisture content (second revision)

The Committee responsible for the preparation of this standard has reviewed the provisions of the following ISO standard and has decided that it is acceptable for use in conjunction with this standard:

International Standard Title

ISO 7301 : 2021 Rice — Specification

In reporting the result of a test or analysis made in accordance with this standard, if the final value, observed or calculated, is to be rounded off, it shall be done in accordance with IS 2: 2022 'Rules for rounding off numerical values (second revision)'.

NATIONAL EXPLANATORY NOTE

In Indian context, the 'husked rice' is generally referred as 'dehusked rice'. Therefore, 'husked rice' may also be termed as 'dehusked rice' in the Title, Scope (Clause 1) and elsewhere in the standard.

Introduction

The milling yields obtained from abrasive testing mills of the same model, although with differing adjustments, may vary more widely than those obtained from different types of abrasive testing mill.

This International Standard specifies a method for the determination of milling yield, to ensure that results obtained by different operators using abrasive test mills are comparable.

This Pade has been Intentionally left blank

Indian Standard

RICE — DETERMINATION OF THE POTENTIAL MILLING YIELD FROM PADDY AND FROM HUSKED RICE

1 Scope

This International Standard specifies a laboratory method for the determination of the yield of husked rice obtained from paddy or parboiled paddy (*Oryza sativa* L.), and for the determination of the yield of milled head rice obtained from paddy or parboiled paddy, or from husked rice or husked parboiled rice.

This International Standard is only applicable to abrasive milling equipment.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 712, Cereals and cereal products — Determination of moisture content — Reference method

ISO 7301, Rice — Specification

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 7301 and the following apply.

3.1

husked rice yield

amount of husked rice obtained from paddy

3.2

milled rice yield

amount of milled rice (head rice, broken kernels, and chips) obtained from paddy or husked rice

3.3

milled head rice yield

amount of milled whole kernel and head rice obtained from paddy or husked rice

3.4

perfect kernel

husked or milled kernel without any broken part which is not immature or malformed

4 Principle

The husk is mechanically removed from paddy. The resultant husked rice is then weighed. Next, the bran and germ are mechanically removed from the husked rice to a fixed reduction in mass and the resulting milled head rice is weighed.

5 Apparatus

Usual laboratory apparatus and, in particular, the following.

- **5.1 Sample divider**, conical sampler or multiple-slot sampler with distribution system.
- **5.2 Testing husker**, suitable for removal of the husk from paddy without damaging the kernels.
- **5.3 Abrasive testing mill**, suitable for removal of the pericarp and germ from husked rice.
- 5.4 Tweezers.
- 5.5 Small bowls.
- **5.6 Balance**, capable of being read to the nearest 0,01 g.

6 Sampling

Sampling is not part of the method specified in this International Standard. A recommended sampling method is given in ISO 24333^[1].

It is important the laboratory receive a truly representative sample which has not been damaged or changed during transport or storage.

7 Preparation of test sample

The laboratory sample shall have a mass of not less than 1,5 kg.

Carefully mix the laboratory sample to make it as homogeneous as possible, then reduce it through a sample divider (5.1) to obtain the test sample.

Determine the moisture content of the test sample in accordance with ISO 712. The acceptable range is a mass fraction of (13.0 ± 1.0) %.

If the moisture content is outside the acceptable range, the laboratory sample should be kept at ambient temperature and humidity for a sufficient period to obtain balanced moisture content within the specified range.

8 Procedure

8.1 Adjustment of equipment

8.1.1 Testing husker adjustment

Adjustment of the test equipment shall be carried out prior to the determination.

The testing husker (5.2) shall be considered correctly adjusted when, subsequent to dehusking of rice samples with grain dimensions similar to those of the laboratory sample, the following are not present:

- a) husked rice with damage to the pericarp;
- b) grains of paddy or husked rice in the separated husk;
- c) husk particles in the husked rice.

8.1.2 Testing mill adjustment

Adjust the testing mill (5.3) by milling rice samples of grain dimensions similar to those of the laboratory sample in order to remove a mass fraction, ($f \pm 0.5$) %, of the husked rice so that the difference, D, between the mass of milled head rice (head rice includes whole kernels) and the mass of milled whole kernels is needed to meet the requirements as follows:

- a) for grain with an average length of the test sample kernels \leq 7,00 mm: $D \leq$ 3 %;
- b) for grain with an average length of the test sample kernels >7,00 mm: $D \le 5$ %.

The value of *f* shall be agreed by the parties involved.

8.2 Determination of husked rice yield (see Figure A.1)

Take the test sample and divide it to give a portion suitable for the equipment. Pass through an aspiration apparatus to remove light matter, then spread the paddy and remove any extraneous matter. Weigh it to the nearest 0,01 g. A minimum of 200 g is recommended.

Dehusk the paddy in the testing husker (5.2). Any grains of paddy that are not dehusked shall be manually separated from the husked rice, and dehusked once more. Then the residual paddy shall be manually dehusked and added to the husked rice already present.

Weigh the total yield of husked rice to the nearest 0,01 g.

Carry out the test in duplicate.

8.3 Determination of milled head rice yield

8.3.1 Starting from paddy or parboiled paddy (see Figure A.2)

8.3.1.1 Proceed in accordance with 8.2 to obtain the husked rice.

Divide the husked rice to give a portion suitable for the equipment. Weigh and record the mass to the nearest 0,01 g. A minimum of 100 g is recommended.

8.3.1.2 Thoroughly clean the testing mill (5.3). Introduce the husked rice sample and mill it for the time necessary to remove the mass fraction ($f \pm 0.5$) % of its total mass. Predetermine the milling time by trials on each test sample.

Weigh the milled rice obtained and record the mass to the nearest 0,01 g.

Separate the head rice from the broken kernels and place the two fractions in separate bowls.

Weigh the head rice and record the mass to the nearest 0,01 g.

Carry out the test in duplicate.

8.3.2 Starting from husked rice or husked parboiled rice (see Figure A.3)

- **8.3.2.1** Take the test sample and divide it to give a portion suitable for the equipment. Pass through an aspiration apparatus to remove light matter, then spread the husked rice and remove any extraneous matter. Weigh it to the nearest 0,01 g. A minimum of 100 g is recommended.
- **8.3.2.2** Continue in accordance with the procedure specified in 8.3.1.2.

Carry out the test in duplicate.

9 Expression of results

Calculate the results as quotients to four decimal places according to Table 1.

Table 1 — Calculation of milling yields

Parameter	Mass, m, of test portion starting from ^a				
Faranietei	Paddy	Husked rice			
Husked rice, y ₀	$m_{\rm y}/m_{\rm x}$	1			
Milled rice, y ₁	m_1/m_Z	m_1/m_Z			
Milled head rice, y ₂	m_2/m_z	m_2/m_z			

For variable definitions, refer to the procedure schemes in Figure A.1 or A.2 for paddy, and Figure A.3 for husked rice.

Express the yields as percentage mass fractions, with reference to the starting material, as follows:

Potential yield of husked rice, y_h

$$y_h = y_0 \times 100 \%$$

Potential yield of milled rice, y_m

$$y_{\rm m} = y_0 y_1 \times 100 \%$$

Potential yield of milled head rice, y_{mh}

$$y_{\rm mh} = y_0 y_2 \times 100 \%$$

Calculate the results for each category to two decimal places, and report them to the nearest 0,1 %.

10 Precision

10.1 Interlaboratory test

Details of an interlaboratory test on the precision of the method are summarized for information in Annex B. The values derived from this interlaboratory test may not be applicable to concentration ranges and matrices other than those given.

10.2 Repeatability

The absolute difference between two independent single test results, obtained using the same method on identical test material in the same laboratory by the same operator using the same equipment within a short interval of time, will in not more than 5% of cases be greater than the arithmetic mean of the values for the repeatability limit, r, from the interlaboratory study:

- a) for husked rice, 1 %;
- b) for milled head rice, 2 %.

10.3 Reproducibility

The absolute difference between two single test results, obtained using the same method on identical test material in different laboratories with different operators using different equipment, will in not more than 5% of cases be greater than the arithmetic mean of the values for the repeatability limit, R, from the interlaboratory study:

- a) for husked rice, 3 %;
- b) for milled head rice, 5 %.

11 Test report

The test report shall contain at least the following information:

- a) all information necessary for the complete identification of the sample;
- b) the sampling method used, if known;
- c) the test method used, with reference to this International Standard (ISO 6646:2011);
- d) all operating details not specified in this International Standard, or regarded as optional, together with details of any incidents which may have influenced the test result(s);
- e) the test result(s) obtained;
- f) if the repeatability has been checked, the final quoted result obtained.

Annex A (normative)

Procedure schemes

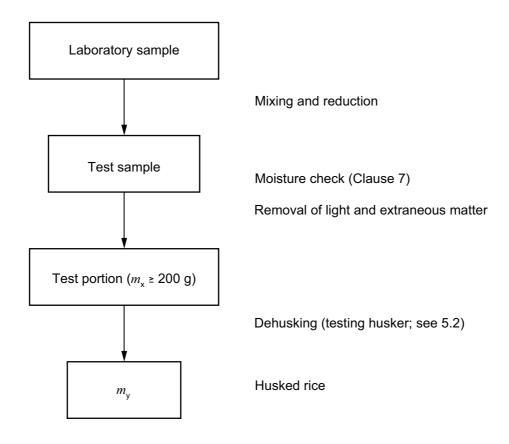


Figure A.1 — Starting from paddy or parboiled paddy: yield of husked rice

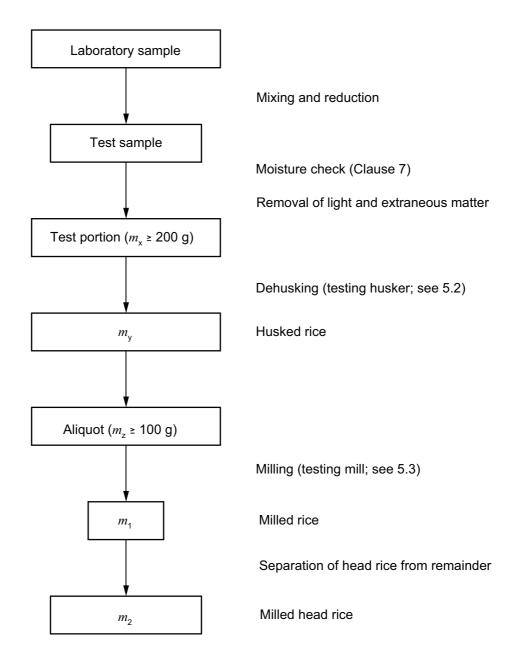


Figure A.2 — Starting from paddy or parboiled paddy: yield of husked rice, milled rice and milled head rice

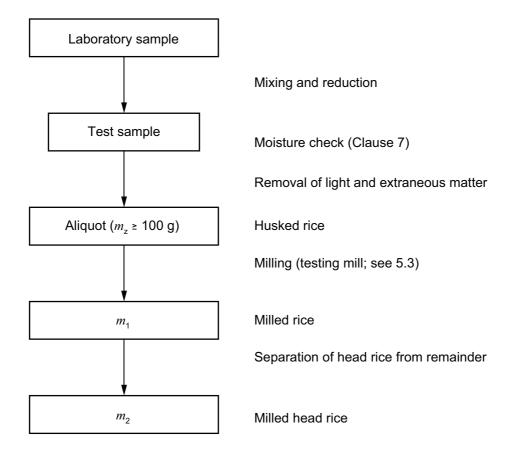


Figure A.3 — Starting from husked rice or husked parboiled rice: yield of milled rice and milled head rice

Annex B (informative)

Results of an interlaboratory test

An interlaboratory study carried out by Henan University of Technology (China), with the participation of 10 laboratories, each of which carried out three determinations on seven different types of kernel, gave the statistical results, analysed in accordance with ISO 5725-1:1994^[2] and ISO 5725-2:1994^[3], shown in Tables B.1 and B.2.

The f value was 10 %.

Table B.1 — Repeatability and reproducibility of y_h

Parameter		Rice sample					
Falanietei	GD	JX	НВ	JS	LJ		
Number of laboratories retained after eliminating outliers		9	9	9	8		
Mean value, g/100 g	79,5	79,3	79,1	83,9	81,7		
Standard deviation of repeatability, s_r , g/100 g	0,27	0,17	0,19	0,24	0,18		
Coefficient of variation of repeatability, %	0,34	0,21	0,24	0,28	0,22		
Repeatability limit, $r (r = 2.83 s_r)$	0,75	0,48	0,53	0,67	0,52		
Standard deviation of reproducibility, s_R , g/100 g		1,70	0,68	0,99	0,64		
Coefficient of variation of reproducibility, %	0,82	2,15	0,86	1,18	0,78		
Reproducibility limit, R ($R = 2.83 s_R$)	1,85	4,82	1,92	2,81	1,80		

Table B.2 — Repeatability and reproducibility of $y_{\rm mh}$

Parameter		Rice sample						
		TG ^a	JX	НВ	JS	LJ	JX-ZG ^b	
Number of laboratories retained after eliminating outliers	8	9	8	9	9	8	8	
Mean value, g/100 g	65,0	80,1	49,5	60,0	71,2	67,3	86,6	
Standard deviation of repeatability, s_r , g/100 g	0,31	0,91	0,82	0,45	0,59	0,61	0,38	
Coefficient of variation of repeatability, %		1,14	1,65	0,75	0,82	0,91	0,44	
Repeatability limit, $r (r = 2,83 s_r)$	0,87	2,58	2,31	1,27	1,66	1,73	1,08	
Standard deviation of reproducibility, s_R , g/100 g	1,23	2,46	4,79	1,89	1,88	1,69	1,54	
Coefficient of variation of reproducibility, %	1,89	3,08	9,69	3,15	2,64	2,51	1,78	
Reproducibility limit, R ($R = 2.83 s_R$)	3,47	6,97	13,57	5,35	5,31	4,78	4,37	

a Brown rice.

b Parboiled brown rice.

Bibliography

- [1] ISO 24333, Cereals and cereal products Sampling
- [2] ISO 5725-1:1994, Accuracy (trueness and precision) of measurement methods and results Part 1: General principles and definitions
- [3] ISO 5725-2:1994, Accuracy (trueness and precision) of measurement methods and results Part 2: Basic method for the determination of repeatability and reproducibility of a standard measurement method

This Pade has been Intentionally left blank

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act*, 2016 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website-www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: FAD 16 (22980).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected	

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 2323 0131, 2323 3375, 2323 9402 Website: www.bis.gov.in

Regional Offices:	Telephones
Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002	{ 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091	2367 0012 2320 9474
Northern: Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019	{ 265 9930
Southern: C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113	2254 1442 2254 1216
Western: Plot No. E-9, Road No8, MIDC, Andheri (East), Mumbai 400093	{ 2821 8093

Branches: AHMEDABAD. BENGALURU. BHOPAL. BHUBANESHWAR. CHANDIGARH. CHENNAI. COIMBATORE. DEHRADUN. DELHI. FARIDABAD. GHAZIABAD. GUWAHATI. HIMACHAL PRADESH. HUBLI. HYDERABAD. JAIPUR. JAMMU & KASHMIR. JAMSHEDPUR. KOCHI. KOLKATA. LUCKNOW. MADURAI. MUMBAI. NAGPUR. NOIDA. PANIPAT. PATNA. PUNE. RAIPUR. RAJKOT. SURAT. VISAKHAPATNAM.