

फसल संरक्षण उपकरण — हस्त-चालित
पीठ पर लादा जाने वाला फुहारा, पिस्टन
प्रकार — विशिष्टि और परिक्षण पद्धति
(पाँचवां पुनरीक्षण)

**Crop Protection Equipment —
Hand-Operated Knapsack Sprayer,
Piston Type — Specification
and Test Method**
(*Fifth Revision*)

ICS 65.060.40

© BIS 2024



भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS
मानक भवन, 9 बहादुर शाह जफर मार्ग, नई दिल्ली - 110002
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI - 110002
www.bis.gov.in www.standardsbis.in

July 2024

Price Group 12

FOREWORD

This Indian Standard (Fifth Revision) was adopted by the Bureau of Indian Standards, after the draft finalized by the Agricultural Machinery and Equipment Sectional Committee had been approved by the Food and Agriculture Division Council.

This standard was first published in 1966 and subsequently revised in 1972, 1974 and 1982. A need was felt again to revise the standard to incorporate certain technical modifications as suggested by the testing centres and the manufacturers. The fourth revision was done in the year 1995, whereby, materials of construction were modified and chemical composition of brass casting components as per relevant Indian Standards were given to ensure conformity, provision of use of adjustable hydraulic spray nozzle and supply of cut-off device were given. Also, test for piston made of synthetic rubber was added.

In this revision the following modifications have been made:

- a) Technical data has been elaborated and explained through respective figures and clauses;
- b) Performance test methods and test for components have been incorporated which were earlier covered in IS 10134 : 1994 'Methods of test for manually-operated sprayers (*first revision*)';
- c) Addition of further details as [Annex D](#) (hand operated cut-off device), [Annex E](#) (spray lance) and [Annex F](#) (hydraulic spray nozzle) has been made which were earlier covered in IS 3652 : 1995 'Crop protection equipment — Foot sprayer — Specification (*fourth revision*)'; and
- d) Necessary editorial changes have been made including updating of referred Indian Standards and schematic diagrams given in the standard.

The figures given in the standard are meant only for illustration of the components. These should not be considered as suggestive of any standard design.

This standard contains [9.3](#) which call for agreement between the purchaser and the supplier. For the guidance of the purchaser, information to be supplied by the manufacturer is given in [Annex B](#).

The composition of the Committee responsible for the formulation of this standard is given in [Annex G](#).

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 2022 'Rules for rounding off numerical values (*second revision*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

Indian Standard

CROP PROTECTION EQUIPMENT — HAND-OPERATED KNAPSACK SPRAYER, PISTON TYPE — SPECIFICATION AND TEST METHOD

*(Fifth Revision)***1 SCOPE**

This standard specifies material, performance, constructional and other requirements of hand-operated knapsack sprayer, piston type used for spraying pesticides.

The sprayers of this type are normally used with an average working pressure of 300 kPa to 500 kPa (100 kPa = 1.019 7 kgf/cm² = 1 bar).

2 REFERENCES

The standards listed in [Annex A](#) contain provisions, which through references in this text constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent edition of these standards.

3 TERMINOLOGY

For the purpose of this standard, the following definitions in addition to IS 8480 shall apply (see also [Fig. 1](#), [Fig. 2](#), [Fig. 3](#) and [Fig. 4](#)).

3.1 Agitator — A device for keeping the pesticide material stirred in the tank.

3.2 Connecting Lever — A lever, connecting the handle with the piston rod or the pressure chamber.

3.3 Cycle — One up and one down stroke.

3.4 Filling Hole — A hole provided for filling liquid in tank.

3.5 Gasket — A compressible insert placed between two surfaces to obtain a liquid or gas tight sealing.

3.6 Guide — A component for guiding the movement of the piston rod.

3.7 Handle — A rod or tube, one end of which is attached to the handle pivot while other end carries the grip.

3.8 Handle Pivot — A pivot on skirt/stand to move the handle.

3.9 Hose Connection — Device for connecting the delivery hose with the discharge outlet and the cut-off device.

3.10 Knapsack Sprayer — A sprayer which can be mounted on the back of an operator for spraying.

3.11 Mass — The mass of the sprayer without any liquid in the tank and without discharge line (that is, hose, cut-off device, lance and nozzle).

3.12 Piston — A component for creating pressure or suction and pressure.

3.13 Piston Displacement — The volume displaced by piston during one stroke.

3.14 Piston Rod — A rod or tube to help the movement of piston.

3.15 Piston Type Sprayer — A sprayer in which a piston is used for creating pressure or suction and pressure.

3.16 Pressure Chamber — A component to even out the fluctuations of the liquid pressure and induce uniform flow of the liquid.

NOTE — In some designs, piston rod is not provided. In such cases, pressure chamber helps in movement of piston.

3.17 Pump Cylinder — A component to guide the movement of piston.

3.18 Skirt Stand — A support to prevent the bottom of the tank from damage.

3.19 Spreader — A component for holding the piston in its shape and position.

3.20 Stroke — The maximum travel of the piston rod or the pressure chamber in one direction when the handle moves from a maximum of 35° above to the maximum of 35° below (that is, total 70° or less) of horizontal plane passing through their centre line of the handle pivot.

3.21 Tank — A container to hold liquid and to act as pressure vessel.

3.22 Tank Capacity — The volume of tank when liquid is filled to its neck level, provided the tank is equipped with all its internal mountings.

3.23 Valve Assembly — A device provided to check or to allow the flow of the fluid.

3.24 Volumetric Efficiency — The quotient of the division of the actual volume of the spray fluid discharged in one stroke by the piston displacement, expressed as percent.

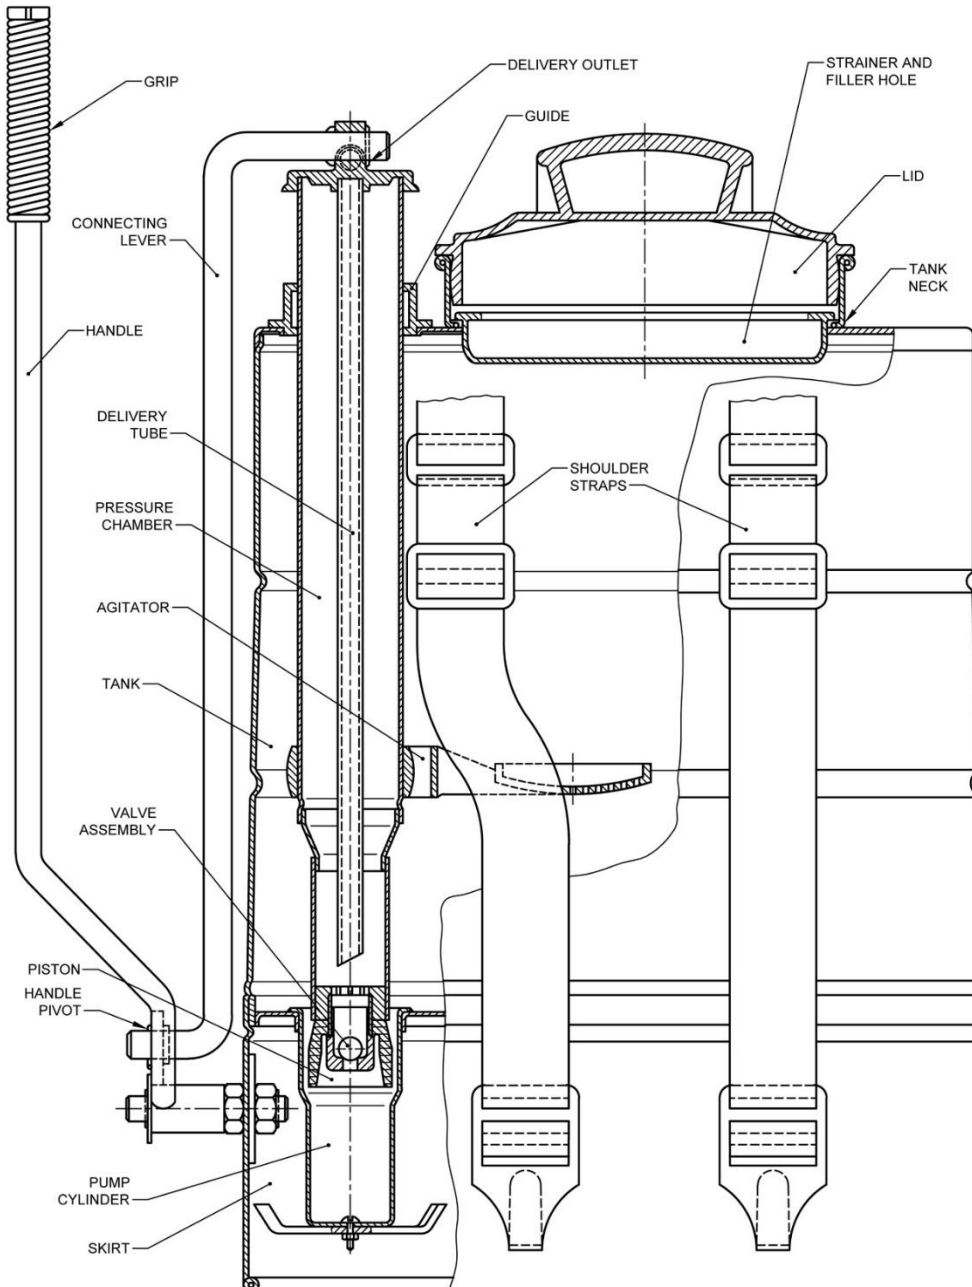


FIG. 1 KNAPSACK SPRAYER, PUMP ASSEMBLY INSIDE TANK

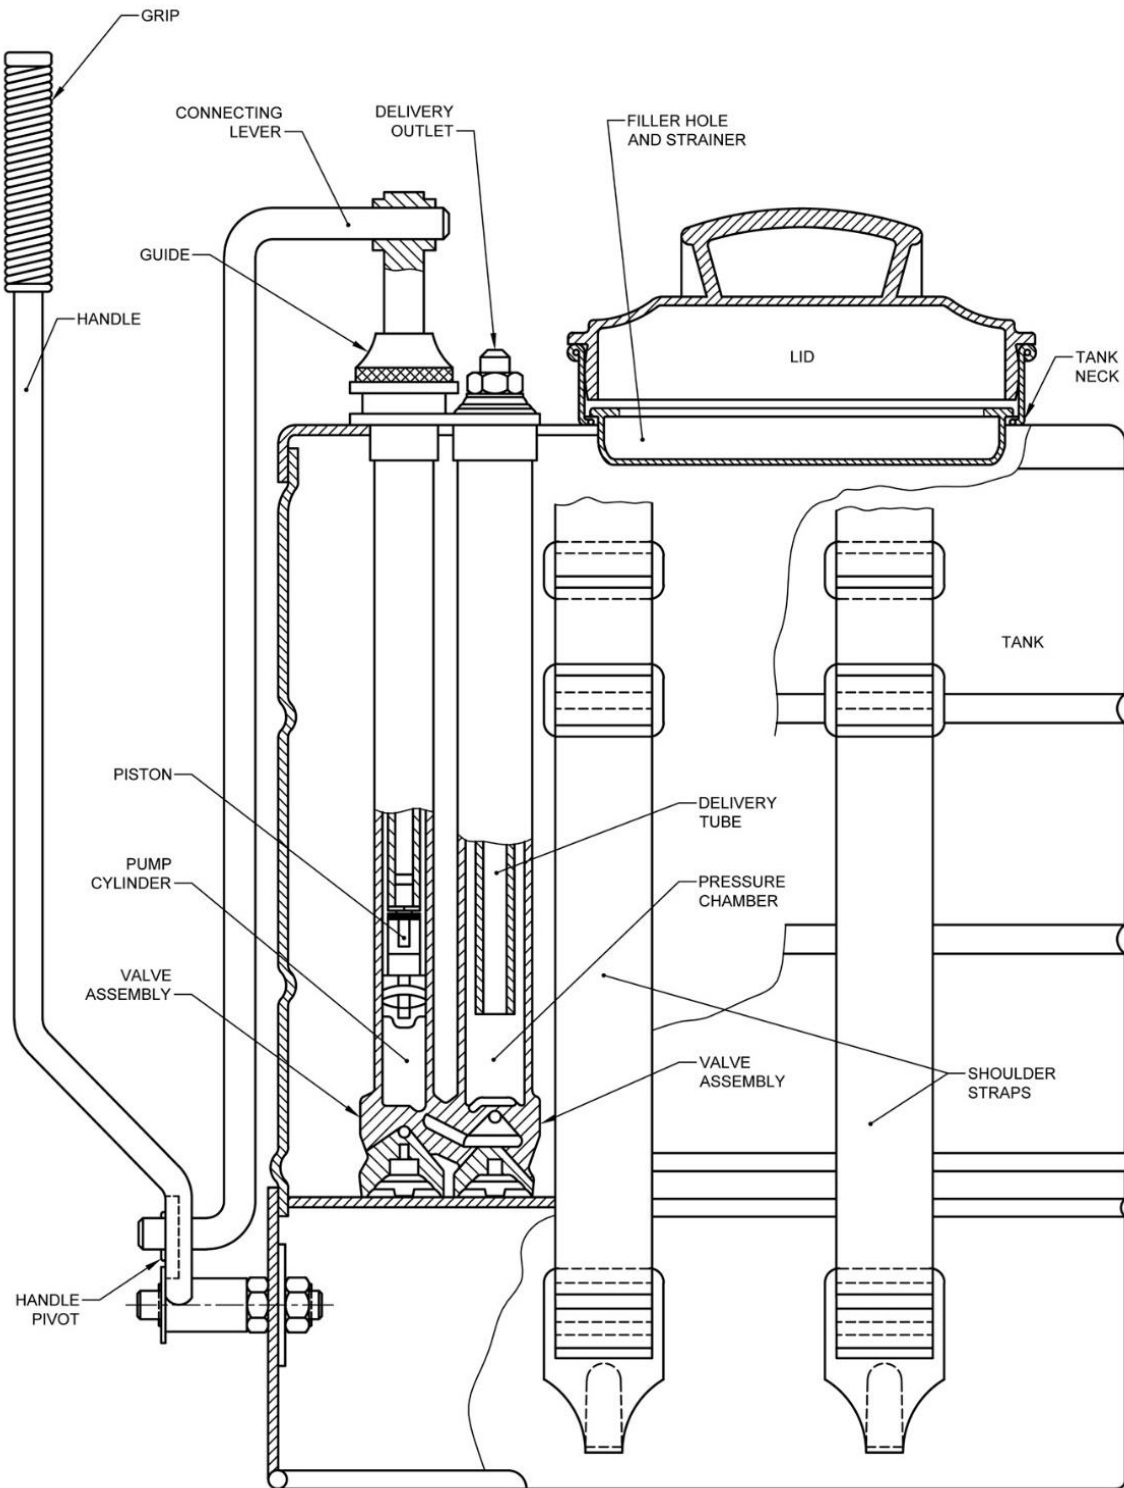


FIG. 2 KNAPSACK SPRAYER, PUMP ASSEMBLY INSIDE TANK

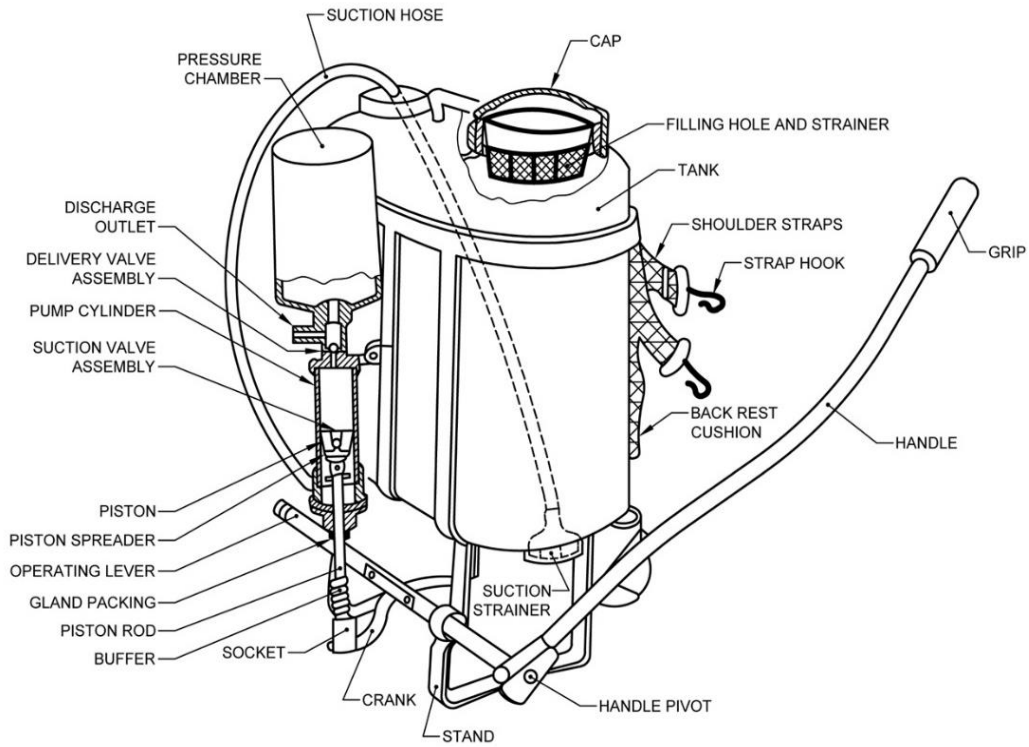


FIG. 3 KNAPSACK SPRAYER, PUMP ASSEMBLY OUTSIDE TANK

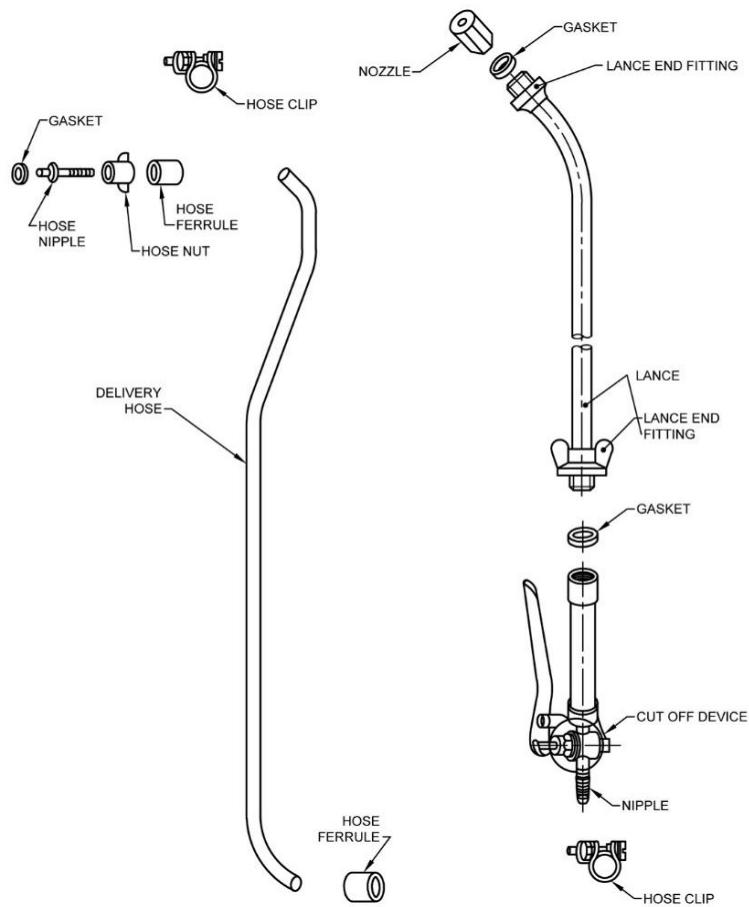


FIG. 4 DISCHARGE LINE OF SPRAYER

4 MATERIALS

4.1 The material of construction of various components of the sprayer shall be selected from col (3) of [Table 1](#). The brass casting components shall conform to chemical composition of IS 292 (grade to be declared by the manufacturer). The material other than brass casting may conform to the relevant Indian Standards. Some of the relevant Indian Standards are given in [Annex C](#) for guidance.

4.2 The material for spray lance, nozzle, cut-off device, and its components shall be as given in [Table 1](#).

4.3 The material used for various parts shall be declared by the manufacturer in the manual (see [7.1](#)).

4.4 All metallic parts coming in contact with the pesticides should preferably be of the same material to minimize bimetallic corrosion.

4.5 The engineering plastics should be used for manufacturing various components as given in [Table 1](#) shall be either acetal co-polymer or del drive-P.

Table 1 Materials of Construction of Various Components

([Clauses 4.1, 4.2 and 4.5](#))

SI No.	Component	Materials
(1)	(2)	(3)
i)	Tank	Brass, engineering plastic, stainless steel
ii)	Lid or cap	Brass, engineering plastic, stainless steel
iii)	Pressure chamber	Brass, engineering plastic, stainless steel
iv)	Pump cylinder	Brass, plastic with brass lining, engineering plastic, stainless steel
v)	Guide	Brass, engineering plastic, stainless steel
vi)	Hose nut	Brass, engineering plastic, stainless steel
vii)	Hose nipple	Brass, engineering plastic, stainless steel
viii)	Agitator	Engineering plastic
ix)	Piston rod	Brass, stainless steel
x)	Crank	Steel, engineering plastic
xi)	Hose ferrule/clip	Steel
xii)	Strainer	Stainless steel, brass, engineering plastic
xiii)	Handle	Steel
xiv)	Operating lever	Steel
xv)	Handle pivot	Steel
xvi)	Handle grip	Plastic
xvii)	Piston	Chrome tanned leather, PVC
xviii)	Spreader	Brass, stainless steel, engineering plastic
xix)	Strap	Woven web cotton, synthetic yarn
xx)	Hose	PVC

Table 1 (Concluded)

SI No.	Component	Materials
(1)	(2)	(3)
xxi)	Gasket	Synthetic rubber, PVC, fibre
xxii)	Valve seat	Brass, stainless steel, engineering plastic
xxiii)	Valve	Brass, stainless steel, engineering plastic
xxiv)	Skirt/stand	Steel, plastic
xxv)	Strap buckle	Steel, engineering plastic
xxvi)	Cushion	Foam rubber, foam plastic
xxvii)	Strap cushion	covering material, canvas, rexine and PVC or plastic-coated fabrics
xxviii)	Back rest cushion	covering material canvas, rexine and PVC or plastic-coated
xxix)	Spray lance	Brass plastic, stainless steel
xxx)	Nozzle components:	
	a) Body and cap	Brass, engineering plastic, stainless steel
	b) Swirl core	Brass, engineering plastic stainless steel,
	c) Disc tip	Brass, ceramic, stainless steel
	d) Spindle, coupling nut and gland nut	Brass, engineering plastic stainless steel
xxxi)	Cut off device components:	
	a) Body, valve stem, valve seat, gland, nut, cap and collar, nipple	Brass, engineering plastic, stainless steel
	b) Valve	Brass, synthetic rubber, stainless steel, plastic
	c) Operating knob/lever	Brass, engineering plastic
	d) Operating trigger	Stainless steel, engineering plastic
	e) Spring	Stainless steel
	f) Gasket	Synthetic rubber, fibre, PVC
	g) Gland seal	PVC
	h) Gland packing	Asbestos rope

NOTES

1 All the components mentioned above may not be available in a particular sprayer.

2 The components other than those listed in above table and coming in direct contact with the pesticides shall be made of corrosion resistant material.

5 PERFORMANCE

5.1 Discharge Rate

When tested in accordance with the method given in [11.1](#), the pump shall be capable of discharging a minimum of 500 ml of water per minute.

5.2 Volumetric Efficiency

When tested in accordance with the method given in [11.2](#), the volumetric efficiency shall not be less than 85 percent.

6 CONSTRUCTIONAL REQUIREMENTS

6.1 Tank

The tank capacity (*see* [3.22](#)) shall be 10 litres to 20 litres with a tolerance of ± 0.5 litre.

6.1.1 The thickness of the sheet used in manufacture of brass tank shall be $0.63 \text{ mm} \pm 0.03 \text{ mm}$.

6.1.2 The tank, when filled up to the neck level with water, shall not show any sign of leakage and shall not buckle.

6.2 Skirt/Stand

The tank shall be provided with a skirt/stand which shall project a minimum of 6 mm beyond the lowest portion of the bottom of the tank.

6.3 Straps

Two straps of not less than 800 mm (when adjusted to maximum possible length) and minimum 38 mm in width shall be provided in order to help carriage of the sprayer. Provision for adjustment of the length of each strap shall also be provided.

The straps and their assembly shall withstand the test prescribed in [11.3](#).

6.4 Filling Hole

A filling hole of minimum 90 mm in diameter if circular or in minor axis, if oval shall be provided on the top of tank.

6.4.1 The filling hole shall be covered with tightly fitted cap or lid. It shall withstand the test given below.

The tank is filled water to its neck level and the cap is tightly fitted. The tank is tilted to 15° from vertical position. There should not be any leakage.

NOTE — The water coming out from the bleeding hole of the cap shall not be considered as leakage.

6.4.2 Strainer

A removable strainer on the filling hole or a separate filling funnel with strainer shall be provided to filter the liquid while filling in the tank. The average size of any side or diameter of the apertures of the strainer shall not be more than $625 \mu\text{m}$.

NOTE — For measuring size of apertures, select 10 consecutive apertures in the strainer and measure each side or diameter as case may be. Average the measured value and report.

6.5 Pressure Chamber

The pressure chamber shall have a minimum effective capacity of 8 times the piston displacement (*see* [3.13](#)).

The pressure chamber shall be able to withstand test prescribed in [12.3](#).

NOTE — The volumetric capacity of the pressure chamber from discharge outlet ends up to the open end of dip tube shall be treated as an effective capacity. However, the dip tube has not been provided the total volumetric capacity of pressure chamber shall be treated as effective capacity.

6.6 Pump Cylinder

The inner diameter of the pump cylinder shall not be more than 55 mm. The inner diameter of the pump shall be measured below the bell mouth of the cylinder.

The pump cylinder shall be able to withstand the test prescribed in [12.1](#).

NOTE — In the pump having suction stroke the test as given in [6.6](#) would be carried.

6.7 Piston

The height of the straight portion piston shall be 6 mm minimum. In case the piston is made out of synthetic rubber, it shall withstand the test prescribed in [12.3](#).

6.7.1 Spreader

If provided it shall be able to hold the piston in its shape and position without distortion against the wall of the pump cylinder.

6.7.2 The highest and lowest position of the piston shall be possible to attain when the piston handle moves 35° above and 35° below (that is, total 70° or less) of horizontal plane passing through their centre line of the handle pivot respectively.

6.8 Threaded Connections

All metallic threaded connections on the sprayer and its components shall conform to IS 2643. The size designation and type of threads are as given in [Table 2](#). The engaged length of the threads shall not be less than 6 mm.

NOTE — The measurement of thread size shall be done by gauges and not by measuring absolute dimensions (see IS 10216).

6.9 Operating Lever, Handle and Piston Rod

The operating lever, handle and piston rod if provided shall be able to withstand the test prescribed in [12.2](#).

NOTE — Lever shall be provided with grip. The gap between connecting lever and handle near pivot and near

knapsack body shall not be less than 25 mm to prevent crushing of fingers of the operator.

6.10 Discharge Outlet

The discharge outlet shall be nipple type or threaded type. The length of the nipple shall not be less than 20 mm.

NOTE — Pivot pins for delivery outlet fitting with connecting rod shall be riveted or with round headed nut and bolt.

6.11 Gaskets

The gaskets of synthetic rubber, wherever provided, shall withstand the test prescribed in [12.3](#).

Table 2 Threaded Connections

([Clause 6.8](#))

SI No.	Component	Type	Size Designation
(1)	(2)	(3)	(4)
i)	Suction spout	External	Minimum G1/2B or similar metric thread
ii)	Delivery spout	External	Minimum G1/4B or similar metric thread
iii)	Hose connection		
	a) For suction spout	Internal	Minimum G1/2 or similar metric thread
	b) For delivery spout	Internal	Minimum G1/4 or similar metric thread
	c) For cut-off device	Internal	Minimum G1/4 or similar metric thread
iv)	Cut-off device		
	a) Inlet end	External	Minimum G1/4B or similar metric thread
	b) Outlet end	Internal	Minimum G1/4 or G1/4 similar metric thread
v)	Spray lance		
	a) Nozzle end	External	Minimum G1/4B or similar metric thread
	b) Cut-off device end	Internal	Minimum G1/4B or similar metric thread
	c) Bent portion for connection with straight portion (in case of type B2)	Internal	Minimum G1/4 or similar metric thread
vi)	Spray gun inlet	External	Minimum G1/4B or similar metric thread
vii)	Nozzle body	Internal	Minimum G1/4 or similar metric thread

6.12 Delivery Hose

A delivery hose of suitable diameter and at least 110 cm in length shall be provided as agreed to between the purchaser and the supplier. The hose shall be connected with the discharge outlet and the cut-off device through hose connection.

In case of suction hose is provided, it shall withstand pneumatic test as given in [12.1](#).

6.12.1 Hose Connection

The hose connection for threaded type and nipple type connection shall be nut-nipple and clamp type and clamp type respectively. The clamp shall be in the form of ferrule or clip.

The hose and hose connection shall withstand the test prescribed in [12.4](#).

6.13 Cut-off Device and Lance

The cut-off device and lance shall conform to the requirements given [Annex D](#) and [Annex E](#).

NOTES

1 In case the cut-off device and spray lance of types other than those specified in [Annex D](#) and [Annex E](#) are required by purchaser, for special purpose, its requirement shall be as agreed to between the purchaser and the supplier.

2 Pivot pins for cut-off device shall be riveted or with round headed nut and bolt. The lever for cut-off device shall not have sharp edge.

6.14 Nozzles

Unless otherwise specified by the purchaser, the nozzles shall conform to the requirements as given in [Annex F](#).

6.15 Lifting Arrangement

A suitable arrangement other than shoulder strap shall be provided to facilitate lifting of sprayer for shifting from one place to another.

6.16 Mass

The bare mass (*see* [3.11](#)) of the sprayer shall not be more than 8.0 kg.

6.17 Endurance

The sprayer shall withstand the test prescribed in [11.4](#).

7 OTHER REQUIREMENTS

7.1 Manual

The manual shall conform to all the requirements as given in [Annex D](#), [Annex E](#) and [Annex F](#). The manual shall include technical specification of the sprayer, material of construction of various component shown in the exploded view of the sprayer, instructions for operations, calibration and maintenance, common faults and their remedies and safety precaution. IS 11429 shall be referred for the purpose of calibration of the sprayer.

7.2 Spare Parts

Spare parts, separately packed for each sprayer according to the number required by the purchaser shall be provided. If no demand for spare parts has been made, a set of nozzles and gaskets shall be provided with each sprayer.

7.3 Safety

Each sprayer shall be provided with a set of masks, hand gloves and safety goggles.

7.4 Optional Items

At the option of the purchaser, the following items, with the requirements indicated against each, shall be provided in the sprayer. Any other optional items required by the purchaser shall be supplied, the requirements for the same shall be as agreed to between the purchaser and the supplier.

7.4.1 Strap Cushion

A cushion of minimum 40 mm width and 20 mm thickness may be provided with each strap at least on the portion that rests on the shoulder of the operator. The cushion, if provided, shall be covered with suitable covering material, such as canvas, rexine and PVC or plastic-coated fabrics.

7.4.2 Back Rest Cushion

The back rest cushion may be provided. The cushion, if provided, shall be covered with suitable covering material, such as canvas, rexine and PVC or plastic-coated.

7.4.3 Agitator

Mechanical agitator can be provided in the event of provision of hydraulic agitation has not been provided.

7.4.4 Choice of Operation

A sprayer may be supplied with the arrangement of operating lever to be fixed either on right or on left side.

8 WORKMANSHIP AND FINISH

8.1 The components of the sprayer shall have a smooth surface finish and shall be free from burrs, sharp edges and other visual defects that may be detrimental for their use.

8.2 The exposed steel parts shall have a protective coating to prevent surface deterioration. The steel used for hose ferrule/clip, piston rod and buffer shall be plated with cadmium, zinc, or nickel-chrome. Exposed brass parts may be given a suitable protective finish with clear transparent lacquer.

9 MARKING AND PACKAGING

9.1 Marking

Each sprayer shall be marked with the following particulars:

- a) Manufacturer's name or recognized trademark;
- b) Batch or serial number, date; and
- c) Tank nominal capacity.

9.2 BIS Certification Marking

The product(s) conforming to the requirements of this standard may be certified as per the conformity assessment schemes under the provisions of the *Bureau of Indian Standards Act, 2016* and the Rules and Regulations framed thereunder, and the products may be marked with the Standard Mark.

9.3 Packing

Each sprayer shall be packed, as agreed to between the purchaser and the supplier, for safe handling in transit.

10 SAMPLING FOR LOT ACCEPTANCE

Unless otherwise agreed to between the purchaser and the supplier, sampling of the sprayers for lot acceptance shall be done in accordance with **3** of IS 7201 (Part 1).

11 PERFORMANCE TESTS

11.1 Test for Discharge Rate

11.1 The hole for agitation purpose, in case of

hydraulic type agitator, shall be sealed.

11.1.1 The sprayer shall be rigidly mounted on the test bench (*see Fig. 5*) in such a way that its handle shall be operated in the direction it is designed for operation.

11.1.2 The handle of the sprayer shall be connected to an adjustable crank mechanism operated by a motor through a speed-step-down drive so as to give movement of 16 ± 1 cycles per minute, in such a manner as to maintain proper alignment between the piston rod and pump cylinder.

11.1.3 One end of the hose of 2 m length shall be connected to the discharge outlet of the sprayer and the other end to the inlet end of a straight rigid tube of 75 cm in length and 6 mm internal diameter.

11.1.4 A pressure regulator shall be fitted at the outlet end of the rigid tube to adjust the pressure.

11.1.5 An extension tube of suitable shape may be fitted at the outlet end of the pressure regulator for collecting the discharge of water in a container.

11.1.6 A pressure gauge (*see IS 3624*) having full scale reading from 0 to not exceeding 2.5 times and not less than 1.5 times the average working pressure of the sprayer, shall be fitted in the rigid tube at a distance of 15 cm from the inlet end of the pressure regulator on its upstream side.

11.1.7 The rigid tube with the pressure gauge and the pressure regulator shall be mounted on a separate test bench, other than the one having driving unit, in order to eliminate vibration.

11.1.8 The crank mechanism shall be adjusted so as to utilize the full stroke of the sprayer.

11.1.9 The tank of the sprayer shall be filled up to its specified capacity with clean water and the piston rod or pressure chamber (as the case may be) shall be operated at a constant speed of 16 ± 1 cycles per minute.

11.1.10 The pressure regulator shall be adjusted to develop a pressure of 300 kPa within a fluctuation of ± 20 percent.

11.1.11 The discharge of water in 1 min shall be collected and measured.

11.1.12 The above test shall be repeated four times, and the average value of the measured discharge shall be calculated.

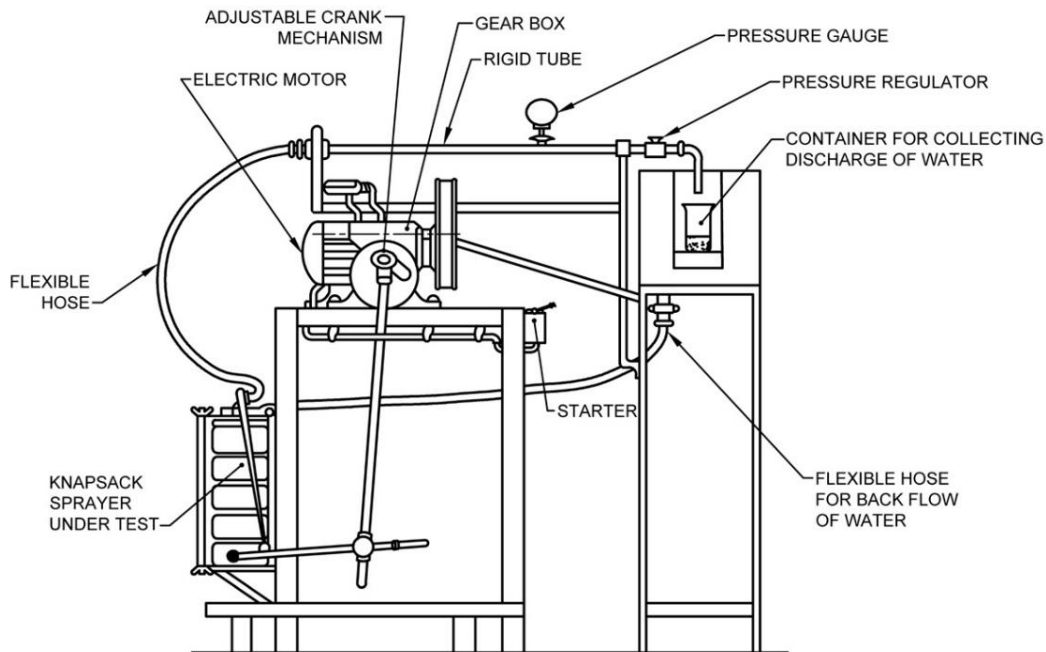


FIG. 5 RIG FOR CONDUCTING PUMP PERFORMANCE AND ENDURANCE TEST ON KNAPSACK SPRAYER (SCHEMATIC)

11.2 Test for Volumetric Efficiency

11.2.1 The discharge of water in 1 min or 10 successive strokes shall be collected and measured in accordance with [11.1](#) for the sprayer. Repeat the test four times and calculate average value of the measured discharge. Calculate the volume of water in one cycle, that is, in one discharge stroke from the average measured discharge.

11.2.2 Calculate the piston displacement by measuring the inner diameter of the pump cylinder and the actual length or one stroke. The inner diameter of the pump cylinder shall be measured below the bell mouth of the cylinder.

The length of one stroke shall be measured by subjecting the pump to a pressure of 300 kPa within a fluctuation of ± 20 percent.

11.2.3 Divide the value obtained in [11.2.1](#) by the value obtained in [11.2.2](#) and express the result in percentage.

11.2.4 The volumetric efficiency shall be recorded in the test report.

11.3 Test for Strap and its Assembly

11.3.1 The tank shall be filled with clean water to its specified capacity.

11.3.2 The sprayer (without discharge line) shall be hung from a solid support by its strap(s) simulating its carriage on the shoulder of an operator.

11.3.3 Raise the tank vertically to a height of 300 mm and allow to drop freely and hang by the strap(s).

11.3.4 Repeat the operation given in [11.3.3](#) for 24 times.

11.3.5 Parts (straps, brackets, etc) of the assembly shall not break during the test.

11.4 Test for Endurance

11.4.1 The sprayer or pump shall be operated in accordance with the method given for discharge rate test [11.1](#) for a minimum period of 48 h without measuring the liquid. The period should be covered minimum with continuous stretch of 6 h.

11.4.2 The sprayer or pump shall not show any leakage, deformation or breakdown during the test.

NOTE — For routine and acceptance test, the sprayer or pump shall be run for a minimum period of 5 min instead of 48 h.

12 TESTS FOR COMPONENTS

12.1 Test for Leakage and Deformation of Pressure Chamber, Pump Cylinder, Pressure Tank and Suction Hose

12.1.1 *Pneumatic Test*

A hose shall be attached to the opening of the pressure chamber or pump cylinder or tank. In case there are a number of openings, other than the one to which the hose is attached shall be sealed. The pressure chamber or pump cylinder or tank shall then be pneumatically pressurized to a minimum of one and a half times the normal working pressure of the sprayer and the pressure shall be retained for a period of 1 min. The component shall be disconnected, immersed in water and examined for any leakage and deformation.

The pressure chamber or pump cylinder or tank shall not show any leakage or deformation during this test.

12.1.2 *Hydraulic Test*

With the similar connection as that of [12.1.1](#), the pressure chamber or pump cylinder or tank shall be pressurized to a static hydraulic pressure of a minimum of two and a half times the normal working pressure of the sprayer and the pressure shall be retained for a period of 1 min. The pressure chamber or pump cylinder or tank shall be examined for any leakage or deformation.

The pressure chamber or pump cylinder or tank shall not show any leakage or deformation during the test.

12.2 Test for Operating Lever, Handle and Piston Rod

12.2.1 The discharge outlet of the spray shall be closed that is, no discharge shall be operated to develop the pressure and the handle shall be operated to develop the pressure in the sprayer until a pressure of minimum two and a half times the

normal working pressure is developed. (In case it is not possible to develop the minimum pressure of two and a half times the normal working pressure by the operation or handle, the pressure shall be developed in the sprayer from any other source).

12.2.2 When the handle, operating lever and piston rod are operated at this pressure these shall not distort, crack or break.

12.3 Test for Gasket and Piston Made up of Synthetic Material

12.3.1 All the gaskets/piston made up of synthetic material in the sprayer shall be immersed in the test mixture of 60 percent kerosene, 5 percent benzene, 20 percent toluene and 15 percent xylene for a period of 72 h at a temperature of 27 °C to 33 °C and then dried in air at the same temperature range for 24 h. The gaskets/piston then be placed in their original positions.

12.3.2 The spray complete with its discharge line shall be operated at its normal working conditions for one hour.

12.3.3 The gaskets/piston fitted to the points shall not show any leakage during the test.

NOTE — This test shall be conducted at the end of all the tests with new set of gaskets/pistons.

12.4 Test for Hose and Hose Connection

The inlet of the hose shall be connected to a hydraulic pump through hose connection. The other end of the hose shall be connected to the appropriate cut-off device. The outlet of the cut-off device shall be dosed, that is, no discharge is allowed. A minimum hydrostatic pressure of 1.5 MPa, using water as a liquid, shall be developed in the hose assembly and the pressure shall be retained for a period of 1 min.

The hose and hose connection shall not show any leakage, crack or breakage during the test.

NOTES

1 Test for hose and hose connection, cut-off device and lance may be conducted at a time.

2 The gaskets and piston test shall be conducted with a new set of gaskets and piston provided with sprayer.

ANNEX A

(Clause 2)

LIST OF REFERRED STANDARDS

<i>IS No.</i>	<i>Title</i>	<i>IS No.</i>	<i>Title</i>
IS 292 : 1983	Specification for leaded brass ingots and casting (<i>second revision</i>)		Hand-tools and hand-operated/animal-drawn equipment (<i>first revision</i>)
IS 2643 : 2005/ ISO 228-1 : 2000	Pipe threads where pressure-tight joints are not made on the threads — Dimensions, tolerances and designation (<i>third revision</i>)	IS 8480 : 2023/ ISO 5681 : 2020	Equipment for crop protection — Vocabulary (<i>second revision</i>)
IS 3624 : 1987	Pressure and vacuum gauges (<i>second revision</i>)	IS 10216 : 1988/ ISO 228-2 : 1987	Pipe threads where pressure tight joints are not made on the threads — Verification by means of limit gauges (<i>first revision</i>)
IS 7201 (Part 1) : 1987	Methods of sampling for agricultural machinery and equipment: Part 1	IS 11429 : 1985	Method for calibration of sprayer

To access Indian Standards click on the link below:

https://www.services.bis.gov.in/php/BIS_2.0/bisconnect/knowyourstandards/Indian_standards/isdetails/

ANNEX B

(Foreword)

SPECIFICATION SHEET

- a) Name of the purchaser
- b) Preference of material for various components (*see* [4](#))
- c) Tank capacity (*see* [6.1](#))
- d) Type of handle (*see* [6.9](#))
- e) Type of cut-off device (*see* [6.13](#))
- f) Type of lance (*see* [6.13](#))
- g) Type of nozzle (*see* [6.14](#))
- h) Length of delivery hose (*see* [6.12](#))
- j) Spare parts needed (*see* [7.2](#))
- k) Optional items (*see* [7.4](#))

ANNEX C

(Clause 4.1)

LIST OF RELEVANT INDIAN STANDARDS FOR MATERIALS OF CONSTRUCTION

<i>IS No.</i>	<i>Title</i>	<i>IS No.</i>	<i>Title</i>
IS 28 : 1985	Phosphor bronze ingots and castings (<i>fourth revision</i>)	IS 2062 : 2011	Hot rolled medium and high tensile structural steel — Specification (<i>seventh revision</i>)
IS 210 : 2009	Grey iron castings — Specification (<i>fifth revision</i>)	IS 2954 : 1978	Specification for vegetable tanned leather for belting (<i>first revision</i>)
IS 277 : 2018	Galvanized steel strips and sheets (plain and corrugated) — Specification (<i>seventh revision</i>)	IS 4170 : 1967	Specification for brass rods for general engineering purposes
IS 292 : 1983	Specification for leaded brass ingots and castings (<i>second revision</i>)	IS 4413 : 1981	Specification for brass wires for general engineering purposes (<i>first revision</i>)
IS 407 : 1981	Specification for brass tubes for general purposes (<i>third revision</i>)	IS 4454 (Part 1) : 2001	Steel wire for mechanical springs — Specification: Part 1 cold drawn unalloyed steel wire (<i>third revision</i>)
IS 410 : 1977	Specification for cold rolled brass sheet, strip and foil (<i>third revision</i>)	IS 4687 : 1995	Gaskets and packings — Gland packings asbestos — Specification (<i>second revision</i>)
IS 617 : 2024	Aluminium and aluminium alloys ingots for remelting and castings for general engineering purposes — Specification (<i>fourth revision</i>)	IS 6528 : 1995	Stainless steel wire — Specification (<i>first revision</i>)
IS 737 : 2008	Wrought aluminium and aluminium alloy sheet and strip for general engineering purposes — Specification (<i>fourth revision</i>)	IS 6603 : 2024	Stainless steel semi-finished products, bars, wire rods and bright bars — Specification (<i>second revision</i>)
IS 739 : 1992	Wrought aluminium and aluminium alloys — wire for general engineering purposes (<i>third revision</i>)	IS 6911 : 2017	Stainless steel plate, sheet and strip — Specification (<i>second revision</i>)
IS 1570 (Part 5) : 1985	Schedules for wrought steels: Part 5 Stainless and heat resisting steels (<i>second revision</i>)	IS 7328 : 2020	Specification for polyethylene material for moulding and extrusion (<i>third revision</i>)
IS 1741 : 2019	Latex foam rubber products — Specification (<i>first revision</i>)	IS 7608 : 1987	Specification for phosphor bronze wire for general engineering purposes (<i>first revision</i>)
		IS 14329 : 1995	Malleable iron castings — Specification

To access Indian Standards click on the link below:

https://www.services.bis.gov.in/php/BIS_2.0/bisconnect/knownyourstandards/Indian_standards/isdetails/

ANNEX D

(Foreword, clauses 6.13 and 7.1)

HAND-OPERATED CUT-OFF DEVICE

D-1 TYPES

The cut-off device shall be the following types (see Fig. 6 and Fig. 7):

- a) Trigger type (Type A); and
- b) Knob type (Type B).

D-2 DIMENSIONS

D-2.1 The cross-sectional area of passage in valve body for liquid shall not be less than 12.0 mm².

D-2.2 The diameter of the valve stem shall be minimum 5 mm.

D-2.3 The length of the operating trigger, in Type A cut-off device, from the pivot axis shall be minimum 100 mm.

D-3 STRAINER

D-3.1 The cut-off device may be provided with a strainer on its outlet side, the flow of the liquid through strainer shall be from outward to inward.

D-3.2 The strainer area shall not be less than 1 000 mm².

The average size of any sides or diameter of apertures of the strainer shall not be more than 450 µm.

NOTE — For measuring the size of apertures, select 10 consecutive apertures in the strainer and measure each side or diameter as the case may be. Average the measured value and report.

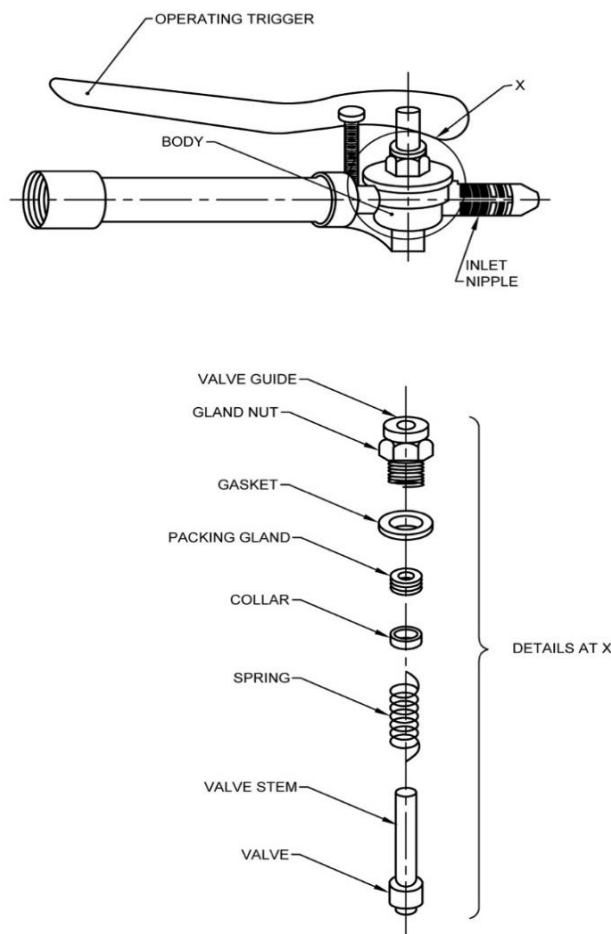


FIG. 6 TRIGGER TYPE (TYPE A) CUT-OFF DEVICE

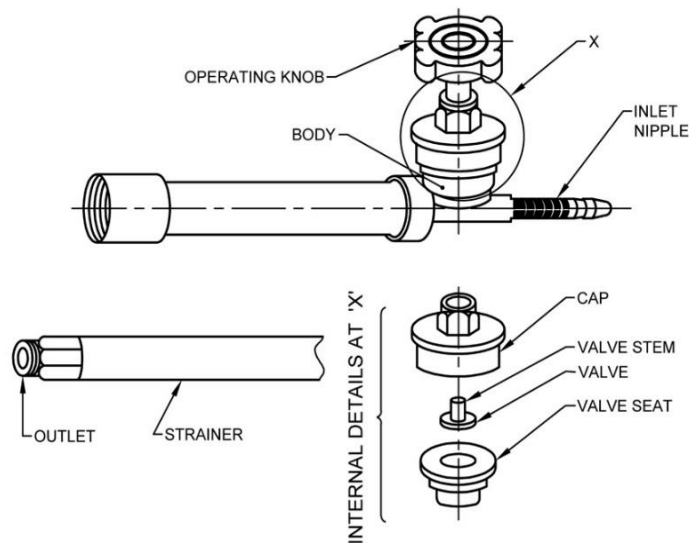


FIG. 7 KNOB TYPE (TYPE B) CUT-OFF DEVICE

D-4 END-FITTINGS

D-4.1 The inlet end-fitting of the cut-off device for connecting the delivery hose, shall be nipple type or thread type. The length of the nipple shall not be less than 20 mm.

D-4.2 The outlet end-fitting of the cut-off device for connecting the lance shall be of thread type.

D-5 GASKETS

End fitting of thread type shall be provided with gaskets. If fitted to the external thread, it shall be recessed for at least one third of its thickness. Where fitted to internal thread, it shall at no time obstruct the passage of the liquid.

D-6 OPERATING TRIGGER/KNOB

D-6.1 The operating trigger in Type A cut-off device shall be attached with valve stem. A locking device shall be fitted which may be in the form of ring sliding over the trigger when the valve is in open position.

D-6.2 When tested in accordance with the method given in [D-6.2.1](#) the maximum torque required for trigger actuation shall be not more than 3.5 Nm (35 kgf/cm).

D-6.2.1 A suggestive arrangement for measuring the torque required to activate the cut-off device is

shown in [Fig. 8](#) the procedure for measurement is as given below:

- a) The cut-off device shall be mounted on a support rigidly;
- b) A U-bolt or other arrangement should be made for putting the weight at the rear most free end of the trigger;
- c) The distance (D) between the pivot point and the point of hanging or bolt or similar arrangement shall be measured;
- d) The weight of known mass shall be applied gradually till the point of application of trigger reaches from its highest position to the lowest possible position. Carefully observe the actions while reaching the lowest possible position. Calculate the total weight W by adding the mass of the weights and the mass of the bolt or arrangement on which the weights were added;
- e) The torque shall be calculated by multiplying D and W ; and
- f) The test shall be repeated and the average value in Nm (kgf/cm), shall be reported.

D-6.3 The operating knob in Type B cut-off device shall be suitably shaped for convenient handling.

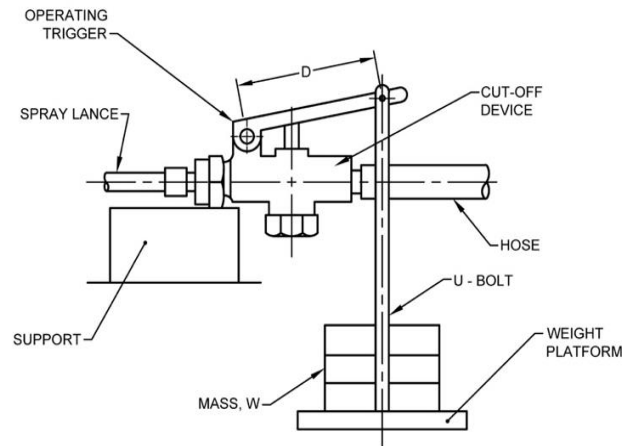


FIG. 8 ARRANGEMENT OF TRIGGER ACTUATION TEST

D-7 TESTS

The cut-off device shall withstand the strength, leakage and reliability test as given in [D-7.1](#) and [D-7.2](#).

D-7.1 Strength Test of Cut-off Device

D-7.1.1 The inlet of the cut-off device shall be attached with a delivery hole and shall be coupled to a hydraulic pump.

D-7.1.2 The outlet of the cut-off device shall be closed, that is, no discharge shall be allowed from the device.

D-7.1.3 A hydraulic pressure of minimum 750 kPa shall be applied at the inlet of the device. The pressure shall be maintained for a period of 5 min.

D-7.1.4 During this test, the cut-off device shall not crack or burst.

D-7.2 Leakage and Reliability Test

D-7.2.1 Test Apparatus

The test apparatus shall be vibration free and shall be so arranged that the valve of cut-off device can be activated at a speed of not more than 15 cycle per minute.

D-7.2.1.1 A typical test apparatus for trigger type cut-off device is given in [Fig. 9](#) and [Fig. 10](#). The dimensional and other details of cam follower and cam follower assembly except for cams given in [Fig. 10](#) are for guidance purpose only. The cam 1 in [Fig. 10](#) shall be used for operating the cut-off device. cam 2, if provided on it may be used to operate a

timing switch for counting the number of cycles.

D-7.2.1.2 A typical test apparatus for knob type cut-off device is given in [Fig. 11](#).

D-7.2.2 Test Liquid

The test liquid shall consist of a 5 percent suspension of any commercially available water dispersible powder.

The test liquid shall be changed after every 6 months of use.

D-7.2.3 Test Method

D-7.2.3.1 The cut-off device or spray gun shall be rigidly mounted on the appropriate test apparatus.

D-7.2.3.2 A spray nozzle or an orifice plate designed to deliver liquid approximately 0.75 litre per minute at a pressure of $300 \text{ kPa} \pm 30 \text{ kPa}$ shall be attached at the outlet of the device. The nozzle or orifice may discharge the liquid directly or through appropriate piping into reservoir from which the liquid is recycled.

D-7.2.3.3 The test liquid shall be applied to the inlet of the cut-off device or spray gun under a static pressure of $300 \text{ kPa} \pm 30 \text{ kPa}$ or $600 \text{ kPa} \pm 60 \text{ kPa}$ respectively. The cut-off device or spray gun shall be operated for 5 000 cycles at a speed of approximately 15 cycles per minute.

D-7.2.3.4 After operating for 5 000 cycles, the test shall be repeated for 500 cycles at a pressure of $600 \text{ kPa} \pm 60 \text{ kPa}$ for cut-off device and at $1 200 \text{ kPa} \pm 120 \text{ kPa}$ for spray gun.

D-7.2.3.5 The cut-off device or spray gun shall not drip or leak through the valve during the test.

D-8 MARKING

Each cut-off device shall be marked with the

following particulars:

- a) Manufacturer's name or recognized trademark; and
- b) Batch or code number.

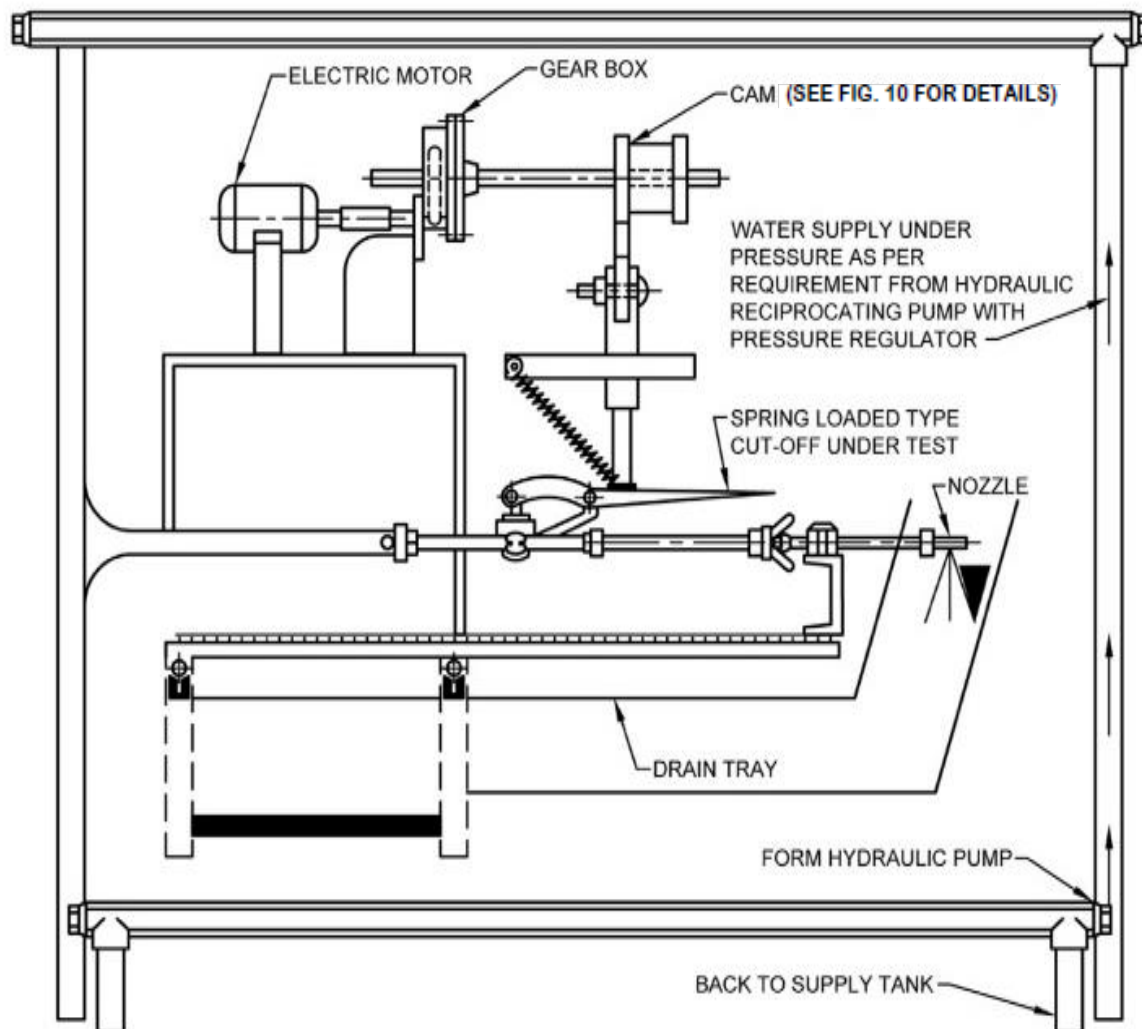


FIG. 9 TRIGGER TYPE CUT-OFF DEVICE DURABILITY TESTER (SCHEMATIC)

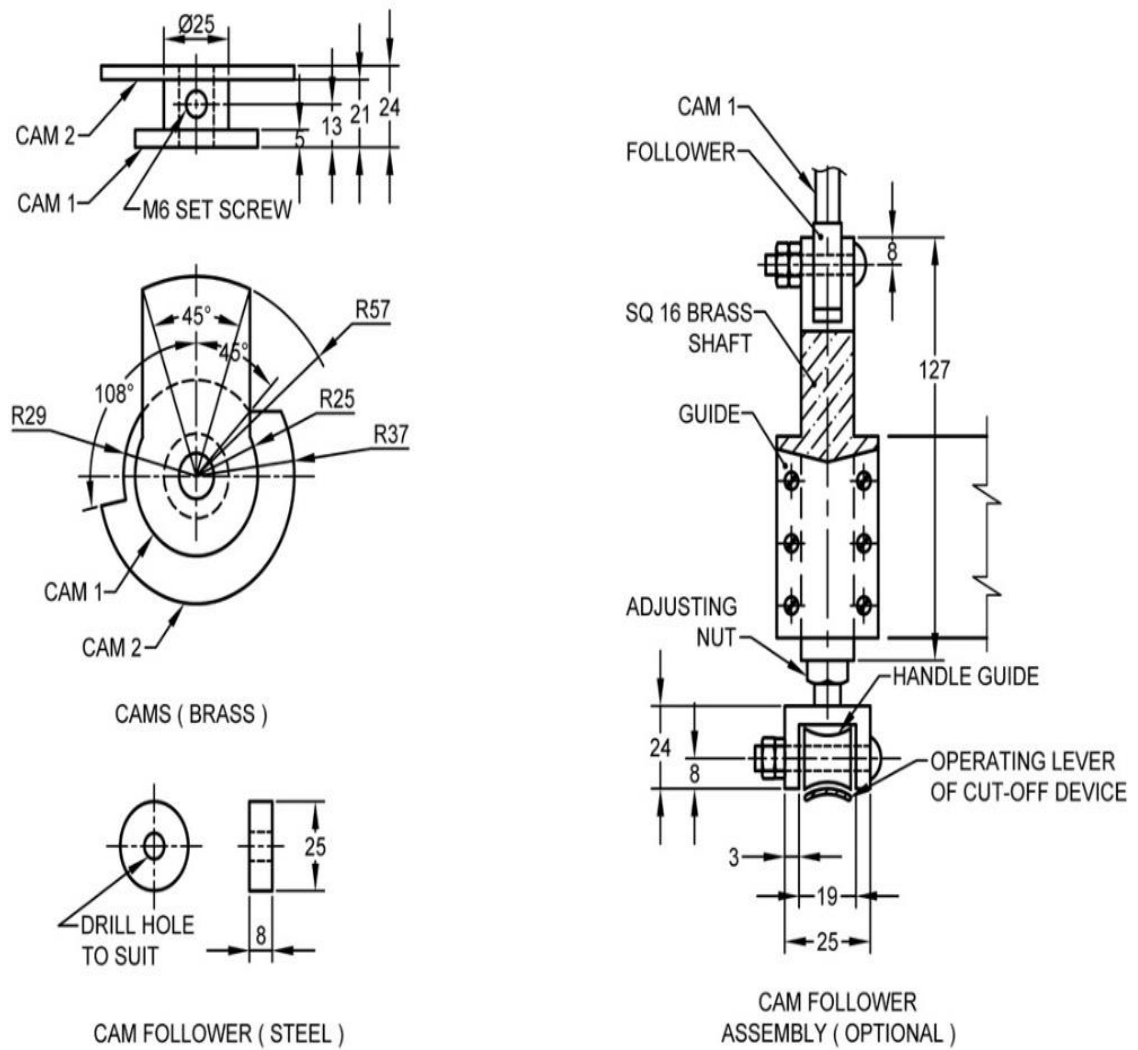


FIG. 10 DETAILS OF CAMS AND CAM FOLLOWER OF DURABILITY TESTER FOR TRIGGER TYPE CUT-OFF DEVICE

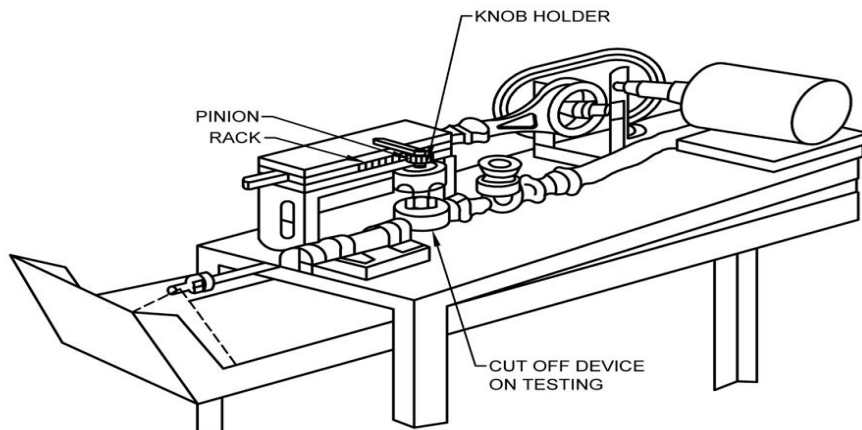


FIG. 11 KNOB TYPE CUT-OFF DEVICE DURABILITY TESTER (SCHEMATIC)

ANNEX E

(Foreword, clauses 6.13 and 7.1)

SPRAY LANCE

E-1 TYPES

The lance shall be of following types (see Fig. 12):

- a) Straight type (Type A);
- b) Gooseneck type (Type B):
 - 1) Single piece (Type B₁); and
 - 2) Two piece (Type B₂).

E-2 MATERIALS

Brass or stainless steel or plastic tube shall be used. The material for end-fittings shall be the same as that of the tube.

E-3 DIMENSIONS

E-3.1 Minimum thickness of the wall of the tube

forming the lance shall be as given below:

- a) Brass tube — 0.60 mm; and
- b) Plastic tube — 3.0 mm.

E-3.2 Internal diameter of the tube shall not be less than 6 mm.

E-3.3 When measured vertically from sealing face to sealing face, as shown in Fig. 12, the nominal length of the lance shall be in between 500 mm and 900 mm \pm 2.5 percent.

E-3.4 At least three-quarter length of Type B lance shall be straight and then provide a bent to the remaining length, a radius of not less than 35 mm at an angle of 45° to 60° (see Fig. 12).

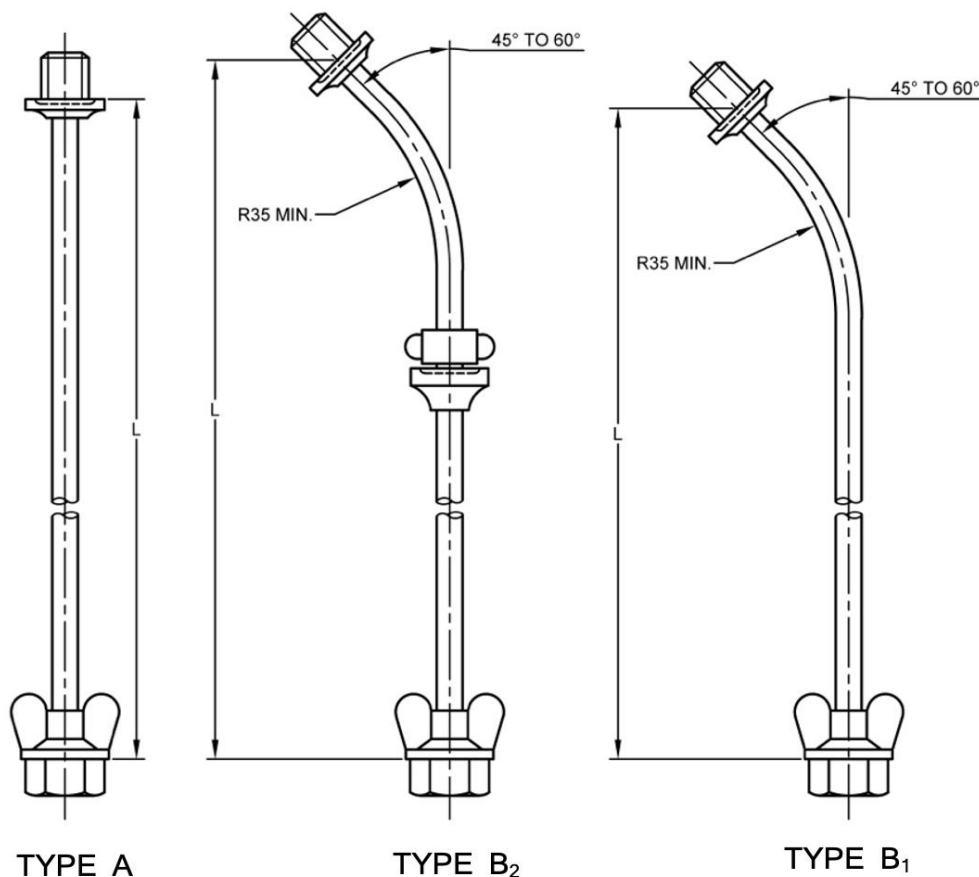


FIG. 12 LANCE

ANNEX F

(Foreword, clauses 6.14 and 7.1)

HYDRAULIC SPRAY NOZZLE

F-1 TYPES

2) Tipple action type (see Fig. 16).

F-1.1 On the basis of spray distribution, the nozzles shall be of the following types:

F-1.2 On the basis of the method of attachment, the nozzles shall be of the following types:

- a) Hollow cone type (see Fig. 13);
- b) Fan type (see Fig. 14);
- c) Adjustable type:
 - 1) Double action type (see Fig. 15); and

- a) Fixed type, or
- b) Swivel type.

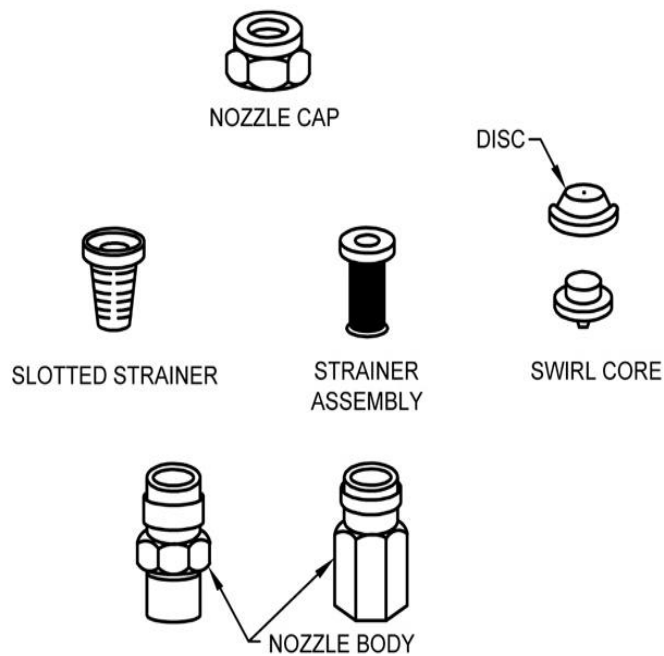


FIG. 13 CONE NOZZLE SHOWING PARTS

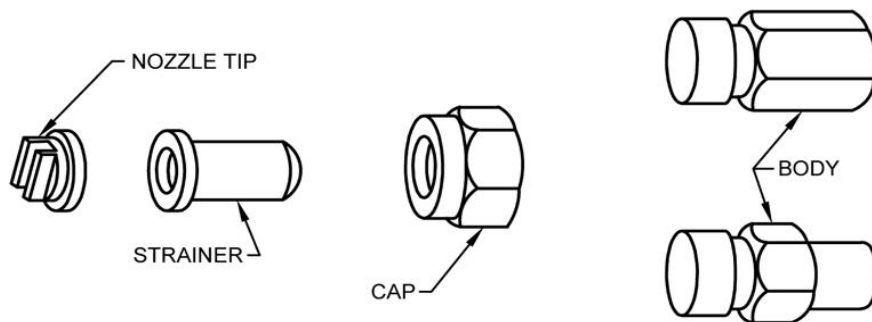


FIG. 14 FAN NOZZLE SHOWING PARTS

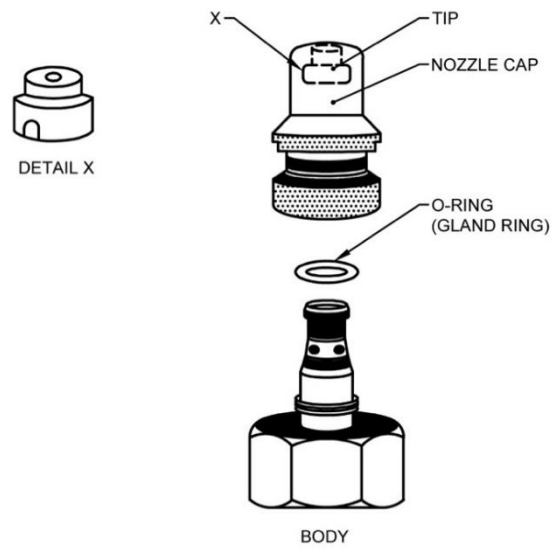


FIG. 15 DOUBLE ACTION NOZZLE

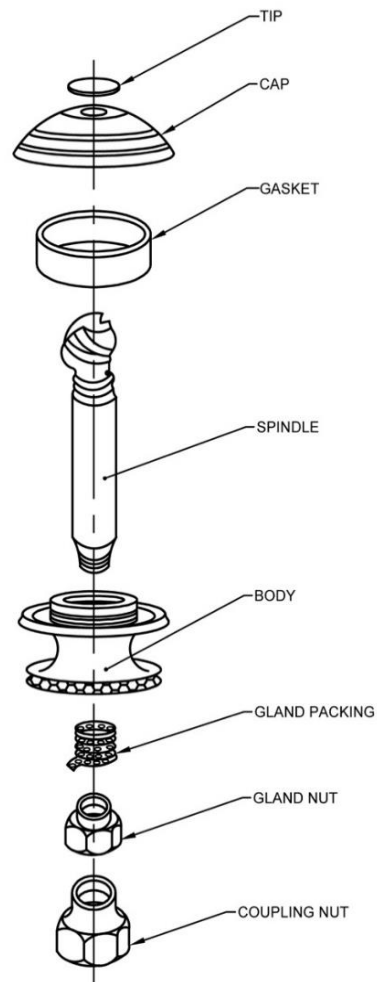


FIG. 16 TRIPLE ACTION NOZZLE

F-2 DESCRIPTION

F-2.1 The nozzle may consist of various components as shown in their respective figures.

F-2.1.1 A tangential velocity in the liquid emerging from cone nozzle orifice could be obtained either by passing it through a tangential or a helical slot in a swirl core or by sending it tangentially in the swirl chamber. Liquid is discharged from the orifice as a hollow cone of spray drops (*see Fig. 17*). Some nozzles of this type are adjustable producing any spray patterns from straight jet to wide angle hollow cone. The degree of atomization is governed by the relative sizes of swirl core and nozzle orifice.

F-2.1.2 Fan nozzles produce a spray pattern in the form of the flat sheet. Generally, the nozzle tip has a narrow hole that is especially shaped to curve inward towards its axis thus narrowing in immediately behind the orifice. The hole in nozzle is either rectangular or more commonly ventricular in shape. The size of the orifice governs the discharge rate at a given pressure.

F-2.1.3 In case of an adjustable nozzle the liquid if discharged from the nozzle orifice in the form of cone spray or jet spray of any pattern upon the axial adjustment of the spindle or body. The swirl core may be integral part of the tip or separately attached.

F-3 PERFORMANCE REQUIREMENTS

F-3.1 Rate of Discharge

F-3.1.1 The discharge rate of the nozzle shall be declared by manufacturer. In case of an adjustable nozzle, the declared value shall be for extreme adjustment for cone and jet spray pattern at a pressure of 300 kPa.

F-3.1.2 When tested in accordance with [F-7](#), the nozzle shall provide a rate of discharge as given in [Table 3](#). The rate of discharge shall be within ± 5 percent for fixed type and ± 10 percent for adjustable type nozzles of the declared value.

F-3.2 Spray Angle

The spray angle of the nozzle shall be declared by the manufacturer. The angle when tested in accordance with the method given in [F-9](#) shall not differ by $\pm 3^\circ$ for fixed type and $\pm 5^\circ$ for adjustable type nozzles from the declared value.

F-3.3 Endurance Test

The hydraulic spray nozzle when tested in accordance with [F-7](#) and [F-9](#) at a pressure of 300 kPa \pm 30 kPa after operating for 48 h duration with continuous stretches of 6 h, variation in discharge rate and spray angle from initial values should not be more than 5 percent and 3° respectively.

F-4 OTHER REQUIREMENTS

F-4.1 If strainer is provided the average size of any side or diameter of the apertures shall not be more than 450 μm .

NOTE — For measuring the size of apertures, select 10 consecutive apertures in the strainer and measure each side or diameter as the case may be. Consider average of the measured values and report.

F-4.2 At the option of the purchaser, the provision shall be made for rotating of nozzle by hand to make it swivel type.

NOTE — With swivel arrangement, it is possible to adjust the nozzle to spray in any direction without changing the position of lance or boom (*see Fig. 18*).

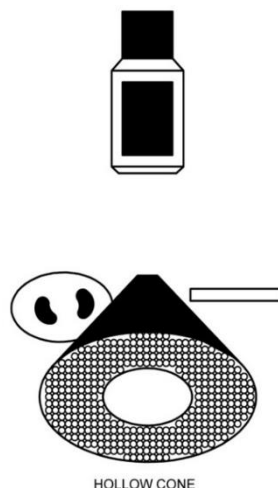


FIG. 17 CONE OR SWIRL NOZZLE

Table 3 Rate of Discharge of Nozzles*(Clauses F-3.1.2 and F-5)*

SI No.	Normal Discharge Rate in ml/min at Pressure of	
	(75 kPa)	(300 kPa)
(1)	(2)	(3)
i)	150	225
ii)	200	300
iii)	225	337
iv)	300	400
v)	337	450
vi)	400	600
vii)	450	675
viii)	600	800
ix)	675	900
x)	900	1 200
xi)	1 200	1 350
xii)	1 350	1 800
xiii)	1 800	2 400
xiv)	2 700	2 700
xv)	3 600	3 600
xvi)	4 500	4 500

NOTE — The nozzle for public health purpose and agricultural purpose would be tested at 75 kPa and 300 kPa.

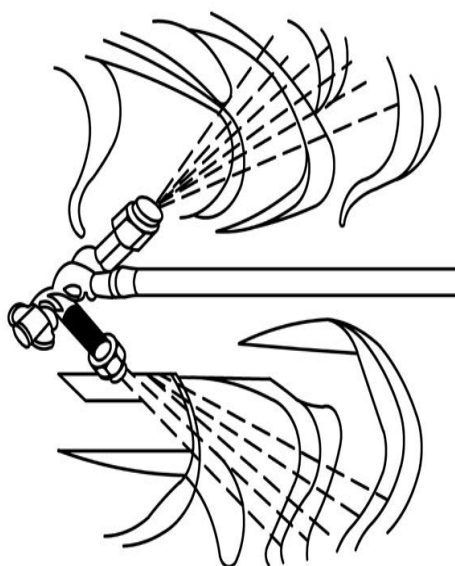


FIG. 18 NOZZLE WITH SWIRL ARRANGEMENT SPRAYING UNDER LEAF

F-5 DESIGNATION

The cone and fan nozzle shall be designated by its identification mark [A for agricultural use and B for public health use (*see* [Note](#) in [Table 3](#))], spray angle and discharge rate. An adjustable nozzle shall be designated by identification mark AN-C-J for cone and jet spray pattern and discharge rate at a controlled pressure of 300 kPa.

Examples:

A nozzle for agricultural use giving 90° spray angle with discharge rate of 300 ml/min shall be designated as: A 90300.

A nozzle for public health use giving 80° spray angle with discharge rate of 900 ml/min shall be designated as: B 80900.

An adjustable nozzle capable of giving 60° spray angle with discharge rate of 600 ml/min during extreme adjustment of cone spray and discharge rate of 1 800 ml/min during jet spray at a controlled pressure of 300 kPa shall be designated as: AN-C60 600-J 1800.

F-6 WORKMANSHIP AND FINISH

F-6.1 The components of the spray nozzle shall be free from burrs and other defects; this applies particularly to the internal surfaces and especially to the orifice.

F-6.2 The mating faces of the cap, tip and nozzle body or boss shall be finished flat so as to seal on the end face of the nozzle body or boss; a gasket may be used, if necessary.

F-6.3 The screw threads shall be well formed, and the crests of the threads shall be free from burrs or any other defects which may prevent free engagement.

F-7 METHOD OF TEST FOR DISCHARGE RATE

F-7.1 The nozzle under test, shall be connected to a supply of clean water or spray materials which are equal in density surface tension and viscosity of water. The water or spray material shall be under a controlled pressure of 75 kPa or 300 kPa or 600 kPa (as the case may be) with pressure gauge (IS 3624). The pressure gauge shall be positioned immediately before the nozzle and shall have full scale reading of pressure from 0 to not exceeding 2.5 times, not less than 1 time, that is to be read. The fluctuation of the pressure during the test shall not be more than 10 percent from the controlled pressure.

F-7.2 Turn of the supply and adjust the pressure and direct the spray for a period timed by stopwatch, into receiving vessel so designed and as to collect to be whole of the spray from the nozzle. The period shall not be less than 60 s or not less than the time required to discharge 500 ml, whichever is higher.

F-7.3 Direct the spray away from the vessel and turn off the supply. Measure the volume of the water or the spray material collected and calculate the discharge rate per minute.

F-7.4 Repeat the above test for at least four times and obtain average rate of discharge per minute.

F-8 METHOD OF TEST FOR SPRAY DISTRIBUTION

F-8.1 Apparatus

F-8.1.1 Patternator

The patternator (*see* [Fig. 19](#)) normally consist of 16 channels each 25 mm \pm 0.5 mm wide and of any convenient length provided that it encompasses the area of the spray. The number of channels may be increased or decreased so that the whole of the spray falls within the patternator. The channels guide the liquid directly to the measuring tube with maximum bore diameter of 24 mm and be long enough to hold minimum of 200 ml test liquid. The depth of channels shall be at least 50 mm and shall have provision to avoid rebound of the spray droplets. The top edge of the trough dividers shall be round (tapered to 2.0 mm \pm 0.5 mm on the top edge) and straight in the horizontal plane, so that no point along with the edge lies more than 1 mm from the straight line joining the corresponding point at each end. The top edges of the dividers shall be positioned so that when a straight edge is laid across the full width of the front and back of the troughs no edge lies more than 1 mm below this. Each divider shall be straight in the vertical plane to within \pm 0.5 mm.

NOTE — The surface of patternator should be such that the droplets should not stick on it.

F-8.1.2 A compressed air supply or small pump giving a steady output, with a liquid supply line from the reservoir of capacity two litres or more.

F-8.1.3 A constant pressure regulator and a pressure gauge should be installed as close to the nozzle as possible.

F-8.1.4 Establish a suitable means of holding the nozzle at the appropriate height with the required facilities for adjustments.

F-8.1.5 A test tube rack so made that the collecting tube can be inserted in the flow when constant flow has been achieved, and retracted after a predetermined period.

F-8.2 Method

F-8.2.1 Carry out the test directing spray, at standard rate of discharge and standard pressure, from the nozzle on the patternator protected by screens from draughts.

F-8.2.2 In the case of fan spray nozzles, mount the nozzle so that the axis of spray sheet is right angle to the upper surface of the trough divisions on the patternator and the nozzle tip at a height of 545 mm above the trough division. In case of cone nozzle, mount the nozzles so that axis of its spray cone is at right angles to the upper surface of the trough division on the patternator and the nozzle tip at a height of 545 mm above trough divisions.

F-8.2.3 Test the cone spray nozzle in three different positions of nozzles, namely, 90°, 180° and 270° (see Fig. 20).

F-8.2.4 The total amount of liquid sprayed for each individual test shall be about a litre.

F-8.2.5 As soon as the amount collected in any of measuring tube has reached 180 ml, collection is

discontinued taking care that no water from the patternator fall into any of measuring tubes.

F-8.2.6 The volume of the water in each measuring tube shall be determined and a graph prepared by plotting the volume of water in each tube against its position in the patternator (see Fig. 21 and Fig. 22).

F-9 METHOD OF TEST FOR SPRAY ANGLE

F-9.1 Carry out test at a place protected from draughts. Mount the nozzle on the test rig as shown in Fig. 23. Connect the nozzle to supply of clean water. A pressure gauge having full scale reading of pressure not exceeding 2.5 times or not less than 1.5 times of the pressure to be read, shall be connected immediately before the nozzle.

F-9.2 Commence the spray at a controlled pressure of 75 kPa or 300 kPa or 600 kPa (as the case may be) within the fluctuation of ± 10 percent. Adjust the arms of the protector as shown in test rig (see Fig. 23) so as to coincide with the clearly visible straight boundary lines of the nozzle spray pattern as shown in Fig. 24. Read the spray angle directly on the protractor and round it off in whole degree.

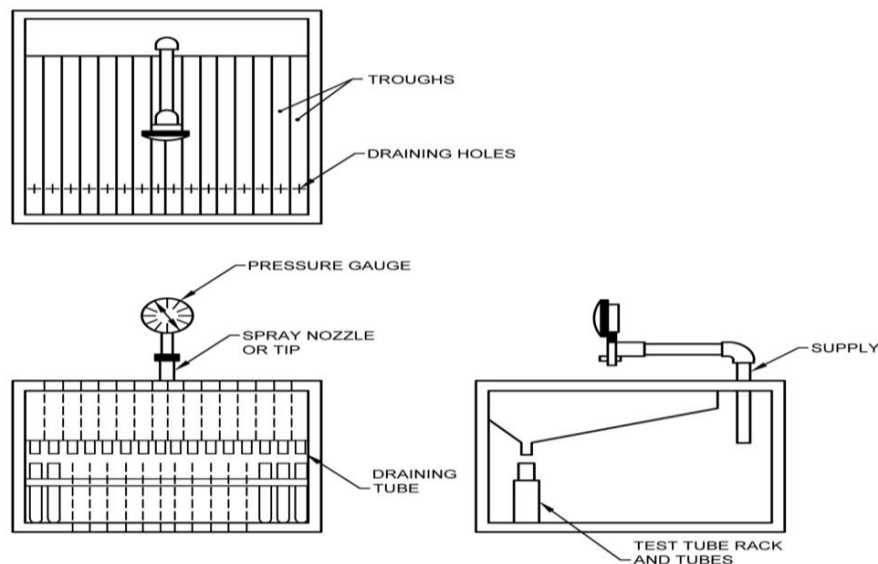


FIG. 19 PATTERNATOR FOR SPRAY DISTRIBUTION TEST

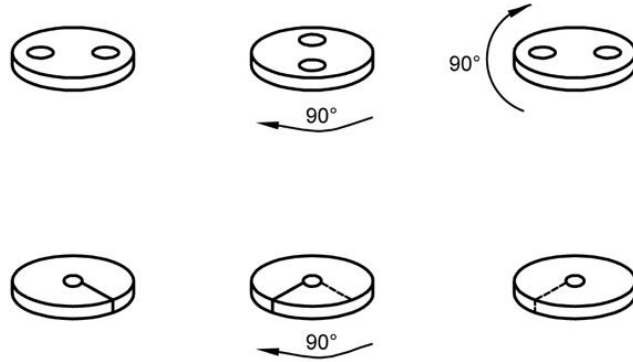


FIG. 20 TEST POSITION FOR CONE SPRAY NOZZLE


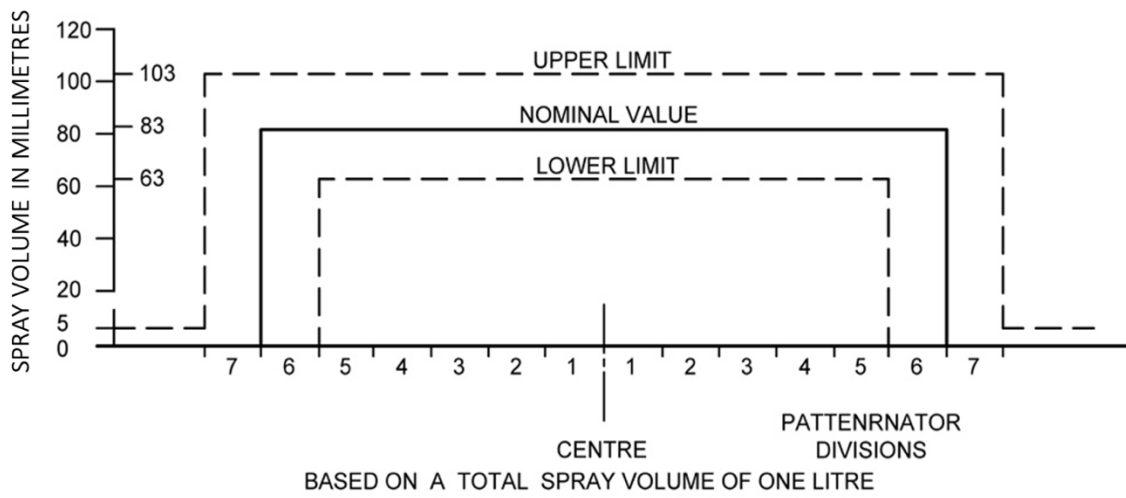


FIG. 21 RECTANGULAR DISTRIBUTION LIMITS

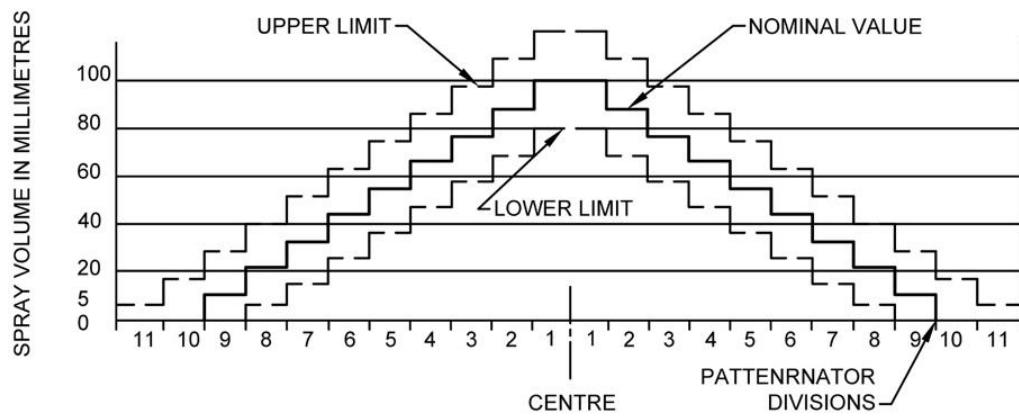

BASED ON A TOTAL SPRAY VOLUME OF ONE LITRE
 TOLERANCE ON EACH DIVISION IS ± 20 ml. DECREMENT OF NOMINAL VALUE
 OUTLINE IS 11.1 ml PER TUBE.

FIG. 22 TRIANGULAR DISTRIBUTION LIMIT

F-10 METHOD OF TEST FOR VARIATION IN DISCHARGE AND DISTRIBUTION DUE TO ABRASION AND CORROSION

This test does not prejudge the life of a nozzle in the actual conditions of use, but is used to compare the resistance of wear of the nozzle and result of deterioration in the distribution.

F-10.1 Test Liquid

F-10.1.1 Clean water with the addition of 20 g/l of abrasive or corrosive material shall be used as a test liquid. The abrasive material may be a synthetic silica powder of following chemical and physical properties:

<i>Sl No.</i>	<i>Property</i>	<i>Requirement</i>
(1)	(2)	(3)
i)	Bulk density	160 kg/m ³
ii)	Specific gravity	1.95
iii)	Average particle size	0.002 2 μm
iv)	Colour	White
v)	Refractive index	135 to 165
vi)	Surface area	140 m ² /g to 160 m ² /g
vii)	pH (5 % water suspension)	7.3
viii)	Loss at 105 °C	5 percent
ix)	Loss at 1 200 °C	10 percent
x)	SO ₂ content	87 percent
xi)	CaO content	0.5 percent
xii)	Fe ₂ O ₃ content	0.2 percent
xiii)	Al ₂ O ₃ content	0.6 percent
xiv)	NaCl content	1.0 percent

F-10.1.2 Ensure that the abrasive material is always well dispersed throughout the liquid. This may be done by means of controlled escape of compressed air with such a pressure so that after 5 min of operation, no deposit of abrasive material is left at bottom of tank.

F-10.1.3 Ensure, if needed by preliminary tests that the liquid retains its effectiveness in relation to the material of nozzle throughout the duration of the test defined in [F-10.2](#). If it does not, replace the abrasive liquid as often as necessary.

NOTE — It is possible to proceed using identical metering orifices from the same batch made from a suitable material in relation to nozzle being tested, measuring the increase in discharge rate after passing through a given volume of the test liquid at a specified pressure.

F-10.1.4 The temperature of the test liquid as all be 20 °C ± 3 °C throughout the test.

F-10.2 Method

F-10.2.1 Measure the discharge rate at the beginning of the test at a controlled pressure (the fluctuation shall not be more than ± 10 percent) and then every hour or at a regular interval chosen according to the speed of wear out of nozzle or at discharge of 4 litres intervals. It shall be continued until the nozzle is abraded to the point where the flow increases beyond the allowable limit of 6 percent.

F-10.2.2 Carry out the spray distribution test at the beginning and the end of the test for about 10 percent, 15 percent and 20 percent of increase in discharge rate if these values are reached.

F-10.3 Result

F-10.3.1 State in the test report the increase in discharge rate thus obtained shall be expressed as a percentage of the initial discharge rate and as function of test period.

F-10.3.2 Also give spray distribution observed at the various degree of wear indicated in [F-10.2.2](#).

F-11 MARKING

Each nozzle shall be marked with the following particulars:

- a) Manufacturer's name or recognized trade-mark; and
- b) Nozzle designation (*see* [F-5](#)).

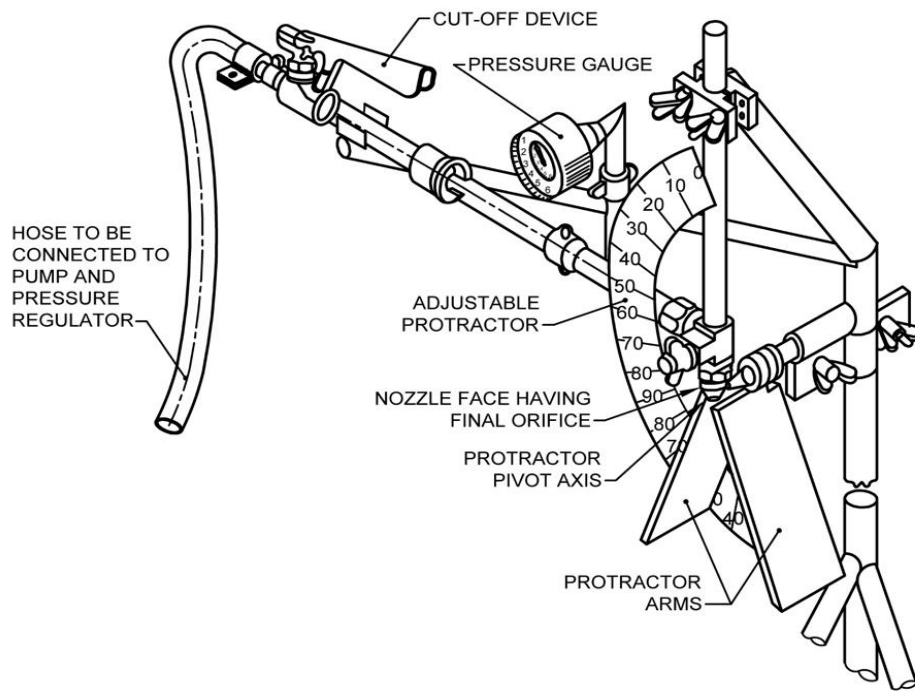


FIG. 23 TEST RIG FOR MEASUREMENT OF NOZZLE SPRAY ANGLE (SCHEMATIC)

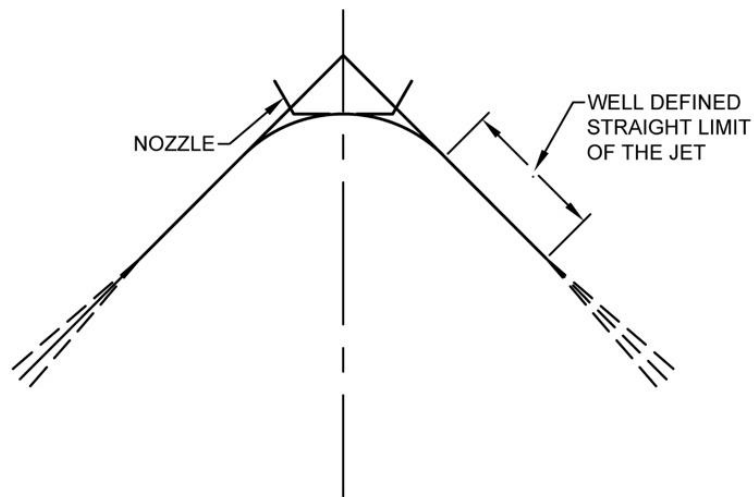


FIG. 24 DIAGRAM OF THE PRINCIPLE FOR MEASURING SPRAY ANGLE

ANNEX G

(Foreword)

COMMITTEE COMPOSITION

Agriculture Machinery and Equipment Sectional Committee, FAD 11

<i>Organization</i>	<i>Representative(s)</i>
ICAR - Central Institute of Agricultural Engineering, Bhopal	DR C. R. MEHTA (<i>Chairperson</i>)
Agricultural Machinery Manufacturers Association (AMMA- India), Gandhinagar	DR SURENDRA SINGH SHRI MITUL PANCHAL (<i>Alternate</i>)
All India Farmers Alliance, New Delhi	DR RAJARAM TRIPATHI SHRIMATI APURVA TRIPATHI (<i>Alternate</i>)
Aspee Agro Equipment Pvt Ltd, Mumbai	SHRI JATIN S. PATEL SHRI GANGADHAR VARPE (<i>Alternate</i>)
Automotive Research Association of India, Pune	SHRI A. AKBAR BADUSHA SHRI GIRISH TANAWADE (<i>Alternate I</i>) SHRI GANGARAM AUTI (<i>Alternate II</i>)
Central Farm Machinery Training and Testing Institute, Budni	SHRI ANIL KUMAR UPADHYAY SHRI BABUL NATH DIXIT (<i>Alternate I</i>) SHRI PARTH LODH (<i>Alternate II</i>)
CCS Haryana Agricultural University, Hisar	DR VIJAYA RANI
CLAAS India Pvt Ltd, Chandigarh	SHRI KRISHNA PRABHAKAR SINGH
CNH Industrial India Pvt Ltd, Pune	SHRI SANTHOSH RAO SHRI SUJIT HINGE (<i>Alternate</i>)
Consumer Guidance Society of India, Mumbai	SHRI SITARAM DIXIT
Dasmesh Mechanical Works Pvt Ltd, Malerkotla	SHRI SARBJEET SINGH PANESAR SHRI GURDEEP SINGH PANESAR (<i>Alternate</i>)
ICAR - All India Coordinated Research Project on Ergonomics and Safety in Agriculture, Bhopal	DR SUKHBIR SINGH DR RAHUL R. POTDAR (<i>Alternate I</i>) SHRIMATI SWEETI KUMARI (<i>Alternate II</i>)
ICAR - All India Coordinated Research Project on Farm Implements and Machinery, Bhopal	DR K. N. AGRAWAL
ICAR - All India Coordinated Research Project on Utilization of Animal Energy, Bhopal	DR S. P. SINGH
ICAR - Central Institute of Agricultural Engineering, Bhopal	DR V. P. CHAUDHARY DR U. R. BADEGAONKAR (<i>Alternate I</i>) DR DILIP JAT (<i>Alternate II</i>)
Indian Council of Agricultural Research, New Delhi	DR PANNA LAL SINGH

<i>Organization</i>	<i>Representative(s)</i>
John Deere India Pvt Ltd, Pune	SHRI ANAND RAJ SHRI CHANDRASHEKHAR DESHMUKH (<i>Alternate I</i>) SHRI PRATIK DURAPHE (<i>Alternate II</i>)
Kerala Agro Machinery Corporation Ltd (KAMCO), Athani	SHRI A. UNNIKRISHNAN SHRI P. C. SAJIMON (<i>Alternate</i>)
Kubota Agricultural Machinery India Pvt Ltd, Faridabad	SHRI ASHOK KUMAR SHRI ASHISH KUMAR MALLARH (<i>Alternate</i>)
Maharana Pratap University of Agricultural and Technology, Udaipur	DR SANWAL SINGH MEENA
Mahatma Phule Krishi Vidyapeeth, Rahuri	DR SACHIN MADHUKAR NALAWADE SHRI VIKRAM PARASHARAM KAD (<i>Alternate I</i>) DR AVDHUT ASHOK WALUN (<i>Alternate II</i>)
Mahindra and Mahindra Ltd, Mumbai	SHRI PRADEEP SHINDE
Ministry of Agriculture, Department of Agriculture, New Delhi	DR V. N. KALE SHRI ARVIND N. MESHRAM (<i>Alternate</i>)
National Innovation Foundation, New Delhi	SHRI RAKESH MAHESHWARI SHRI MAHESH PATEL (<i>Alternate</i>)
National Institute of Plant Health Management, Hyderabad	DR VIDHU KAMPURATH P. SHRI MUTYALA UDAYA (<i>Alternate</i>)
North Eastern Region Farm Machinery Training and Testing Institute, Biswanath Charali	DR P. P. RAO SHRI S. G. PAWAR (<i>Alternate I</i>) SHRI KHAGENDRA BORA (<i>Alternate II</i>)
Northern Region Farm Machinery Training and Testing Institute, Hisar	DR MUKESH JAIN SHRI SANJAY KUMAR (<i>Alternate</i>)
Power Tillers Manufacturers Association, Kolkata	SHRI A. R. GANESH KUMAR
Punjab Agricultural University, Ludhiana	DR MAHESH KUMAR NARANG DR RAJESH GOYAL (<i>Alternate I</i>) SHRI APOORV PRAKASH (<i>Alternate II</i>)
Southern Region Farm Machinery Training and Testing Institute, Anantpur	DR B. M. NANDEDE
Tamil Nadu Agricultural University, Coimbatore	DR R. KAVITHA DR A. SURENDRA KUMAR (<i>Alternate I</i>) DR A. P. MOHANKUMAR (<i>Alternate II</i>)
Tirth Agro Technology Pvt Ltd 'Shaktiman', Rajkot	SHRI PARAG DEVIDAS BADGUJAR SHRI V. AUDI NARAYAN REDDY (<i>Alternate</i>)
Tractor and Mechanization Association, New Delhi	SHRI PHILIP KOSHY SHRI VEENIT NEGI (<i>Alternate I</i>) SHRIMATI DEVYANI (<i>Alternate II</i>)

<i>Organization</i>	<i>Representative(s)</i>
Tube Investments Clean Mobility Pvt Ltd, Chennai	SHRI ABHISHEK SINHA SHRI S. O. TYAGI (<i>Alternate</i>)
Voluntary Organisation in Interest of Consumer Education (VOICE), New Delhi	SHRI B. K. MUKHOPADHYAY
BIS Directorate General	SHRIMATI SUNEETI TOTEJA, SCIENTIST 'E'/DIRECTOR AND HEAD (FOOD AND AGRICULTURE) [REPRESENTING DIRECTOR GENERAL (<i>Ex-officio</i>)]

Member Secretary
SHRI VIKRANT CHAUHAN
SCIENTIST 'B'/ASSISTANT DIRECTOR
(FOOD AND AGRICULTURE), BIS

Sub-committee to Review of Indian Standards Related to Plant Protection Equipment, FAD 11 : 01

<i>Organization</i>	<i>Representative(s)</i>
ICAR – Central Institute of Agricultural Engineering, Bhopal	DR K. N. AGRAWAL (<i>Convenor</i>)
Agriculture Machinery Manufacturers Association, Pune	DR SURENDRA SINGH
ASPEE Agro Equipment Private Limited, Mumbai	SHRI JATIN S. PATEL
Dr. Balasaheb Sawant Konkan Krishi Vidyapeeth, Dapoli	DR PRASHANT U. SHAHARE
John Deere India Private Limited, Pune	SHRI CHANDRASHEKHAR DESHMUKH
Ministry of Agriculture, Department of Agriculture, New Delhi	SHRI ARVIND MESHARAM SHRI P. K. CHOPRA
National Institute of Plant Health Management, Hyderabad	DR VIDHU KAMPURATH P.
Northern Region Farm Machinery Training and Testing Institute, Hisar	DR MUKESH JAIN
Punjab Agricultural University, Ludhiana	DR MAHESH KUMAR NARANG
Southern Region Farm Machinery Training and Testing Institute, Anantapur	DR B.M. NANDEDE

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 2016* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website- www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: FAD 11 (24449).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

	Telephones
Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002	{ 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091	{ 2367 0012 2320 9474
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019	{ 265 9930
Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113	{ 2254 1442 2254 1216
Western : Manakalya, 4 th Floor, NTH Complex (W Sector), F-10, MIDC, Andheri (East), Mumbai 400093	{ 283 25838

Branches : AHMEDABAD, BENGALURU, BHOPAL, BHUBANESHWAR, CHANDIGARH, CHENNAI, COIMBATORE, DEHRADUN, DELHI, FARIDABAD, GHAZIABAD, GUWAHATI, HARYNA, HUBLI, HYDERABAD, JAIPUR, JAMMU & KASHMIR, JAMSHEDPUR, KOCHI, KOLKATA, LUCKNOW, MADURAI, MUMBAI, NAGPUR, NOIDA, PARWANOO, PATNA, PUNE, RAIPUR, RAJKOT, SURAT, VIJAYAWADA.