

ग्राफ़िक प्रौद्योगिकी — मुद्रित सामग्री के लिए
छवि गुणवत्ता मूल्यांकन पद्धतियाँ

भाग 21 माइक्रोस्कोपिक विकृति का मापन
का स्पेक्ट्रोफोटोमीटर के उपयोग से मापन

Graphic Technology — Image
Quality Evaluation Methods for
Printed Matter

Part 21 Measurement of 1D Distortions of
Macroscopic Uniformity Utilizing
Scanning Spectrophotometers

ICS 37.100.10

© BIS 2024
© ISO 2023



भारतीय मानक ब्यूरो
BUREAU OF INDIAN STANDARDS
मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI - 110002
www.bis.gov.in www.standardsbis.in

NATIONAL FOREWORD

This Indian Standard (Part 21) which is identical to ISO 18621-21 : 2023 'Graphic technology — Image quality evaluation methods for printed matter — Part 21: Measurement of 1D distortions of macroscopic uniformity utilizing scanning spectrophotometers' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of the Graphic Art Technology Sectional Committee and approval of the Management and Systems Division Council.

The text of the International Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'; and
- b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to an International Standard for which Indian Standard also exists. The corresponding Indian Standard, which is to be substituted in its place, is listed below along with its degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 13655 : 2017 Graphic technology — Spectral measurement and colorimetric computation for graphic arts images	IS/ISO 13655 : 2017 Graphic technology — Spectral measurement and colorimetric computation for graphic arts images	Identical

[Annex A](#) is 

Contents

Page

Introduction	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Requirements	2
4.1 Principles.....	2
4.2 Apparatus.....	3
4.2.1 General.....	3
4.2.2 Measurement condition.....	3
4.3 Procedure.....	3
4.3.1 Test pattern.....	3
4.3.2 Printing and measuring.....	4
4.4 Evaluation.....	4
4.5 Reporting.....	5
Annex A (informative) Recommended tone value combinations	6
Bibliography	7

Introduction

The subject of image quality is broad and complex, due to its multidimensionality and the apparent characteristics of human vision. Many different methods can be available to provide a measure of a particular visual attribute in some particular viewing context and aimed at a particular printing technology. It is a challenge to have image quality evaluation methods that are independent of the marking technology, i.e. correlate with human perception to provide visual significance to measured differences across many printing technologies. The evaluation of perceived image quality is an active field of research.

The uniformity that can be achieved, or in fact the lack thereof, is an important factor in the evaluation of the overall print quality. Uniformity refers to the subjective impression of the homogeneity of the colour in extended areas up to the document size. Colour uniformity refers to all types of unintended but visible variations in colour, that may go in any direction in colour space and may have any spatial pattern. Spatial patterns include 1D, 2D, periodic, aperiodic, localized, large-scale and small-scale variations. They can be identified as streaks or streakiness, banding, gradients, mottle, moiré and others.

When evaluating perceived uniformity, the intended viewing distance should be taken into account. For practical application it is also common practice to distinguish 2 categories of uniformity that depend on the spatial frequency (or actually the angular frequency as seen by the eye):

- Microscopic uniformity such as graininess that is related to the imaging process and generally consists of a 2D random noise pattern. It is visually relevant for image objects as small as few square mm in size in case of normal reading distance (40 cm).
- Macroscopic uniformity involves distortions in the homogeneity that extend beyond few mm in one or both geometric dimensions. It is generally visible across the document page size with examples called banding, cording stripes or streaks.

This document focuses on the macroscopic uniformity that exhibits 1D type patterns that extend more or less across the printed area of a page. It uses well established colour measurement instruments as the basic measurement device, especially systems that can be combined with automated XY-tables for performing well-defined measurements in a complete 2D grid of measurement locations in an easy way. These systems generally have a minimum pitch in both dimensions of 6 mm. This method takes a much more rigorous approach than the 9-point sample method that is defined in ISO 12647-7 that is applicable to proofing systems.

The measurement method derives a single valued Macro-Uniformity-Score on a scale that ranges from 100 (“perfect uniformity”) to 0 (“extremely poor uniformity”). It is based on the evaluation of the average colour differences that occur in horizontal and vertical rows separately and adds them up to arrive at a single value. Then a formula is applied to compute the Macro-Uniformity-Score that is shown to correlate well with the perception of representative streaks or stripes of toner-based printing systems as well as inkjet based systems.

This document describes a methodology in such a way that other documents can apply it for specific use cases. Such documents will typically need to apply additional constraints on test pages and process control in order to ensure that the resulting Macro-Uniformity-Score can be compared between different printing devices, substrates and ink sets.

*Indian Standard*GRAPHIC TECHNOLOGY — IMAGE QUALITY EVALUATION
METHODS FOR PRINTED MATTER**PART 21 MEASUREMENT OF 1D DISTORTIONS OF MACROSCOPIC
UNIFORMITY UTILIZING SCANNING SPECTROPHOTOMETERS****1 Scope**

This document defines a measurement method for the evaluation of distortions in the macroscopic uniformity of printed areas that are oriented in the horizontal and vertical direction, such as streaks and bands.

It provides requirements for the layout of the test form, the use of a colour measurement device taking measurements in a 2D sampling grid, and the formula to compute the Macro-Uniformity-Score.

This document does not cover any non-adjacent or non-horizontal nor vertical patterns. Due to the used spatial frequency, the Macro-Uniformity-Score does not measure high frequency (fine) patterns such as missing nozzles.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 13655:2017, *Graphic technology — Spectral measurement and colorimetric computation for graphic arts images*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1**banding**

appearance of repeated 1-dimensional patterns within an area that should look homogeneous

Note 1 to entry: The related artefacts are called bands or stripes.

[SOURCE: ISO/TS 15311-1:2020, 3.1, modified — Definition has been made precise and a Note to entry has been added.]

3.2
CIEDE2000

ΔE_{00}

colour difference as defined in ISO/CIE 11664-6 with the default weights for lightness, chroma and hue (1:1:1)

Note 1 to entry: The unit is 1.

3.3
streakiness

appearance of 1-dimensional isolated lines or random patterns within an area that should look homogeneous

Note 1 to entry: In case of a pattern that is clearly repeated, the distortion is mostly indicated as *banding* (3.1). The related artefact are called streaks.

3.4
test element

elemental part of a test pattern used to assess a particular aspect of a printing system

Note 1 to entry: In case of macroscopic uniformity, there is no distinction between the test element and the test pattern because of the fundamental large size of the element.

[SOURCE: ISO/IEC 29112:2018, 3.1.37, modified — A note to entry has been added.]

3.5
test page

arrangement in a printable page of *test elements* (3.4) or *test patterns* (3.6) designed to test one or more particular aspects of a printing system

Note 1 to entry: This is also known as test form.

[SOURCE: ISO/IEC 29112:2018, 3.1.38]

3.6
test pattern

specified arrangement of printable objects (test elements) designed to test a particular aspect of a printing system

Note 1 to entry: In case of macroscopic uniformity there is no distinction between the test element and the test pattern because of the fundamental large size of the element.

[SOURCE: ISO/IEC 29112:2018, 3.1.39, modified — A note to entry has been added.]

4 Requirements

4.1 Principles

The Macro-Uniformity-Score can be evaluated across a printed area with a minimum width or minimum height of 156 mm. This printed area shall originate from a digital input image or rectangular region that is defined by a uniformly tinted area. The colours rendered across the printed area shall be measured in a 2D grid of spot locations. The pitch for these measurement spots shall be maximal 6 mm in both dimensions. In the analysis adjacent CIEDE2000 colour differences^[1] are determined between CIELAB colour values that are averaged along the vertical and horizontal projections separately.

4.2 Apparatus

4.2.1 General

The measurement device shall be in conformance with ISO 13655 and should have a measurement aperture (diameter) not smaller than 3 mm and not larger than 6 mm. The device should be capable of obtaining measurement values from a well-defined 2D sampling grid across the printed area. This may also be accomplished by using a hand-held device mounted in an appropriate XY-table.

4.2.2 Measurement condition

The sample backing shall be white and in conformance with ISO 13655:2017, Annex A. The measurement condition and sample backing material shall be reported.

4.3 Procedure

4.3.1 Test pattern

Each individual test pattern shall be composed as a uniformly tinted area in a given colour space, e.g. K-only, RGB, CMYK or a spot colour. There are no restrictions to the used colour nor the colour encoding, but the values provided in [Annex A](#) may prove useful in enabling Macro-Uniformity-Scores from different uses of this document to be compared. Documentation such as for Fogra M-score^{[2],[5]} can provide guidelines on the selection of colours to test, and how to deal with the series of results from different colours.

The test page containing the test pattern should be in A4 format with at least 156 mm in any of 2 dimensions and preferably stored in PDF format. This corresponds to a matrix of 31 x 26 patches assuming a 6 mm sampling pitch. The patch matrix (n, m) needs to be used for the calculation, see [4.4](#). The dimensions used and the colour encoding shall be reported, see [4.5](#). A typical test pattern is depicted in [Figure 1](#).

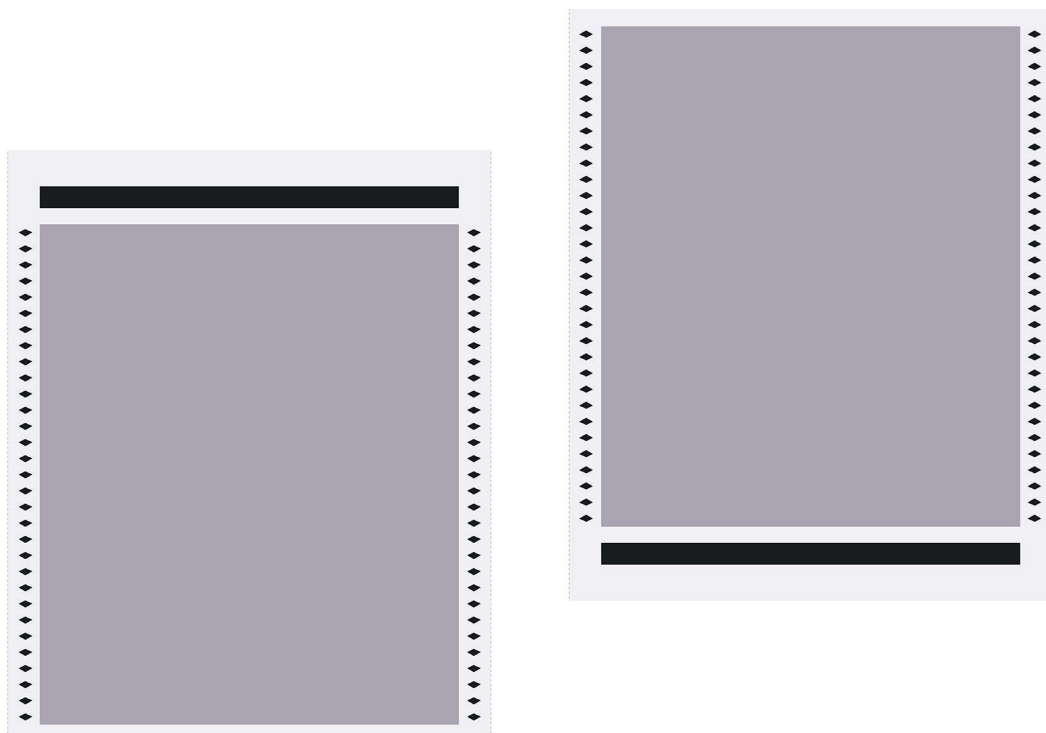


Figure 1 — Example of a test form with markers to enable automated scanning measurements

4.3.2 Printing and measuring

Print the digital test form, defined in [4.3.1](#), in a printing workflow that is appropriate for the print system, taking into account the corresponding output intent profile.

Measure the CIELAB values at all measurement grid locations (806 L*,a*,b*-triplets in case of a grid with 31 x 26 patches) in accordance with ISO 13655, preferably by using M1 method. The colour measurements in the patches around the perimeter should be within the printed area. If this cannot be ensured these colour patches can be omitted in the next processing. This shall be reported.

If there is a reason to omit the measurements of patches around the perimeter (measurements in the 1st row, the last row, the 1st column and the last column) from measurement data because of possibility of measurement error, store and proceed with the remaining CIELAB values (696 L*,a*,b*-triplets in case of the recommended layout) in ISO 28178 compliant format.

4.4 Evaluation

- a) Average all CIELAB measurements across all patches along both dimensions j and i , as shown in [Formulae \(1\)](#) and [\(2\)](#):

$$Lab_{r,j} = \frac{1}{m} \sum_{i=1}^m Lab_{j,i} \quad (1)$$

$$Lab_{c,i} = \frac{1}{n} \sum_{j=1}^n Lab_{j,i} \quad (2)$$

where i and j are the running variables going from 1 to m and 1 to n , respectively, and Lab refers to the triplet of CIELAB values commonly denoted as (L*, a*, b*).

- b) Compute the CIEDE2000 colour difference ΔE_{00} between neighbouring averaged patches in each row and between neighbouring averaged patches in each column using [Formulae \(3\)](#) and [\(4\)](#). For the A4 format with $n = 29$ rows (r) and $m = 24$ (c) columns there will be 28 colour differences for each row and 23 colour difference values for each column.

$$\Delta E_{r,j} = \Delta E_{00}(Lab_{r,j}, Lab_{r,j+1}) \quad (3)$$

$$\Delta E_{c,i} = \Delta E_{00}(Lab_{c,i}, Lab_{c,i+1}) \quad (4)$$

- c) Average colour differences for rows (r) and columns (c) and to get the total colour difference ΔE_t normalize them. See [Formulae \(5\)](#) to [\(7\)](#).

$$\Delta E_r = \frac{\sum_{j=1}^{n-1} \Delta E_{r,j}}{n-1} \quad (5)$$

$$\Delta E_c = \frac{\sum_{i=1}^{m-1} \Delta E_{c,i}}{m-1} \quad (6)$$

$$\Delta E_t = \frac{\Delta E_r + \Delta E_c}{2} \quad (7)$$

- d) Compute the Macro-Uniformity-Score as using [Formula \(8\)](#):

$$S_{MU} = 100 \times \left(\frac{1}{2^{\left(\frac{40 \times \Delta E_t}{15} \right)}} \right) \quad (8)$$

where S_{MU} is the Macro-Uniformity-Score.

Macro-Uniformity-Score has no measurement unit but produces a number in the range 0-100. The values should be rounded to zero decimals. It can be abbreviated as MUS , S_{MU} or MUS -score.

NOTE 1 The factors 40 and 15 reflect best practice parameters that resulted from the fitting with psychophysical data.

NOTE 2 In theory, [Formula \(8\)](#) can include a division by zero, however such a condition is highly unlikely except for synthetic measurements.

4.5 Reporting

The following items shall be reported along with each Macro-Uniformity-Score:

- a) identification of the printing system including the driving software and hardware used, details of the print medium and details of ink set used;
- b) identification of the test form including the size (default: A4) of the page and of the uniformly tinted area;
- c) colour specification of the uniformly tinted area;
- d) measurement condition and sample backing material.

Example

Macro-Uniformity-Score:	70,
Printing system:	Geneva press,
Printer driver:	Fury 1955 RIP,
Print medium:	cardboard,
Test form:	Fogra Homo-Testform A4, 185x155 mm,
Colour:	CMYK = 20,15,15,15,
Measurement condition:	M1, black backing.

Annex A (informative)

Recommended tone value combinations

A.1 In order for a Macro-Uniformity-Score to be compared between devices, substrates and ink sets a specification or standard making use of the method specified in this document will typically need to apply additional constraints on test pages and process control.

A.2 In cases where there is no valid reason to use different values, it is recommended that three forms are created, each with an even tint area using the following tone value combinations from the selected characterization data set:

- a) C, 65 %; M, 50 %; Y, 50 %; K, 50 %;
- b) C, 40 %; M, 30 %; Y, 30 %; K, 30 %;
- c) C, 20 %; M, 15 %; Y, 15 %; K, 15 %.

A.3 In situations where CMYK values are not appropriate, CIELAB values from the selected characterization data set can be used. Alternatively, the following (M1, wb) values may be used:

- a) CIELAB = 32;-2;-2
- b) CIELAB = 52;0;-3
- c) CIELAB = 72;1;-4

Bibliography

- [1] ISO/CIE 11664-6, *Colorimetry — Part 6: CIEDE2000 colour-difference formula*
- [2] ISO/TS 15311-1:2020, *Graphic technology — Requirements for printed matter for commercial and industrial production — Part 1: Measurement methods and reporting schema*
- [3] ISO 28178, *Graphic technology — Exchange format for colour and process control data using XML or ASCII text*
- [4] ISO/IEC 29112:2018, *Information technology — Office equipment — Test pages and methods for measuring monochrome printer resolution*
- [5] KRAUSHAAR, A., Evaluation of within-sheet-uniformity by means of the M-Score Available from: <https://www.fogra.org/M-Score/>
- [6] PEDERSEN Marius et al., Attributes of image quality for color prints, In: *Journal of Electronic Imaging* **19**(1), 011016 (Jan–Mar 2010)

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 2016* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website-www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: MSD 06 (24580).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

	Telephones
Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002	{ 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091	{ 2367 0012 2320 9474
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019	{ 265 9930
Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113	{ 2254 1442 2254 1216
Western : Manakalya, 4 th Floor, NTH Complex (W Sector), F-10, MIDC, Andheri (East), Mumbai 400093	{ 283 25838

Branches : AHMEDABAD, BENGALURU, BHOPAL, BHUBANESHWAR, CHANDIGARH, CHENNAI, COIMBATORE, DEHRADUN, DELHI, FARIDABAD, GHAZIABAD, GUWAHATI, HARYANA, HUBLI, HYDERABAD, JAIPUR, JAMMU & KASHMIR, JAMSHEDPUR, KOCHI, KOLKATA, LUCKNOW, MADURAI, MUMBAI, NAGPUR, NOIDA, PARWANOO, PATNA, PUNE, RAIPUR, RAJKOT, SURAT, VIJAYAWADA.