
मशीनरी की सुरक्षा — आईएसओ 12100
के साथ संबंध

भाग 1 आईएसओ 12100 टाइप-बी और टाइप-सी
मानकों से कैसे संबंधित है

**Safety of Machinery — Relationship
with ISO 12100**

**Part 1 How ISO 12100 Relates to
Type-B and Type-C Standards**

ICS 13.110

© BIS 2024

© ISO 2021



भारतीय मानक ब्यूरो

BUREAU OF INDIAN STANDARDS

मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI - 110002

www.bis.gov.in www.standardsbis.in

NATIONAL FOREWORD

This Indian Standard which is identical to ISO/TR 22100-1: 2021 'Safety of machinery — Relationship with ISO 12100 — Part 1: How ISO 12100 relates to type-B and type-C standards' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on recommendation of the Safety of Machinery Sectional Committee and approval of the Mechanical Engineering Divisional Council.

The text of ISO standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appears referring to this standard, they should be read as 'Indian Standard'; and
- b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards, which are to be substituted in their respective places, are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 12100 : 2010 Safety of machinery — General principles for design — Risk assessment and risk reduction	IS 16819 : 2018/ISO 12100 : 2010 Safety of machinery — General principles for design — Risk assessment and risk reduction	<i>Identical</i>

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 2022 'Rules for rounding off numerical values (*second revision*)'. The number of significant places retained in the rounded-off value should be the same as that of the specified value in this standard.

Contents

Page

Introduction	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General structure of the system of machinery safety standards	2
5 System of type-A, type-B and type-C standards	2
5.1 Type-A standard (ISO 12100).....	2
5.2 Type-B standards.....	6
5.2.1 General.....	6
5.2.2 Type-B1 standards.....	6
5.2.3 Type-B2 standards.....	6
5.3 Type-C standards.....	6
5.3.1 General.....	6
5.3.2 Content provided by type-C standards.....	7
5.3.3 Deviations in a type-C standard from a type-B standard.....	7
6 Practical application of ISO 12100, type-B and type-C standards in order to design a machine to achieve a level of tolerable risk by adequate risk reduction	7
6.1 General.....	7
6.2 Application of an appropriate type-C standard.....	8
6.2.1 General.....	8
6.2.2 Steps to be followed.....	9
7 Navigating appropriate type-B machinery safety standards	10
Annex A (informative) Iterative process of risk assessment and risk reduction	12
Annex B (informative) Types of ISO documents	13
Bibliography	14

Introduction

This document is written to assist the designer/manufacture of machinery and related components in understanding and navigating the different types of ISO machinery safety standards. It presents the different ISO deliverables (see [Annex B](#)) and explains the type-A, type-B and type-C structure of machinery safety standards and their interrelationship with regard to the practical design of machinery subjected to adequate risk reduction to achieve tolerable risk.

This document can be helpful for standard writing committees (type-B and type-C), too. However, it does not provide specification of the general content that is expected to be included in the different types of machinery safety standards. This specification is given in ISO Guide 78.

This document includes a visual representation of many ISO machinery safety standards to assist in improving understanding of the interrelationships and linkages between these documents.

Indian Standard

SAFETY OF MACHINERY — RELATIONSHIP WITH ISO 12100

PART 1 HOW ISO 12100 RELATES TO TYPE-B AND TYPE-C STANDARDS

1 Scope

This document provides assistance to the designer/manufacturer of machinery and related components as to how the system of existing type-A, type-B and type-C machinery safety standards should be applied in order to design a machine to achieve a level of tolerable risk by adequate risk reduction.

This document explains the general principles of ISO 12100 and how this type-A standard is used for practical cases in conjunction with type-B and type-C machinery safety standards.

This document provides assistance to standards-writing committees on how ISO 12100 and type-B and type-C standards relate and explains their function in the risk assessment and risk reduction process according to ISO 12100.

This document includes an overview of existing categories of type-B standards to assist standards readers and writers to navigate the many standards.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 12100:2010, *Safety of machinery — General principles for design — Risk assessment and risk reduction*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 12100 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

adequate risk reduction

risk reduction that is at least in accordance with legal requirements, taking into consideration the current state of the art

[SOURCE: ISO 12100:2010, 3.18, modified — Note 1 to entry has been removed.]

3.2

tolerable risk

level of risk that is accepted in a given context based on the current values of society

Note 1 to entry: The terms “acceptable risk” and “tolerable risk” are considered to be synonymous.

[SOURCE: ISO/IEC Guide 51:2014, 3.15, modified — In Note 1 to entry, the words “For the purpose of this Guide” have been deleted.]

4 General structure of the system of machinery safety standards

Standards on safety of machinery have the following structure:

- **type-A standards** (basic safety standards) giving basic concepts, principles for design, and general aspects that can be applied to machinery;
- **type-B standards** (generic safety standards) dealing with one safety aspect or one type of safeguard that can be used across a wide range of machinery;
- **type-C standards** (machine safety standards) dealing with detailed safety requirements for a particular machine or group of machines.

As shown in [Figure 1](#), ISO 12100 is the type-A standard specifying the general principles for safety of machinery and applies to all machinery.

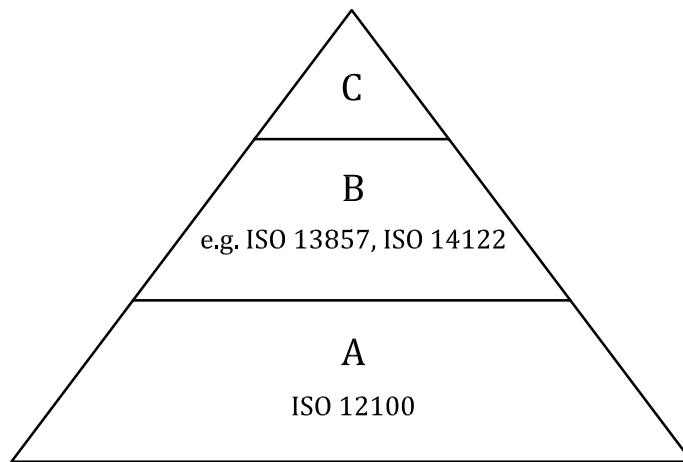


Figure 1 — General structure of the system of machinery safety standards

5 System of type-A, type-B and type-C standards

5.1 Type-A standard (ISO 12100)

ISO 12100 specifies the principle strategy for safety of machinery. Risk assessment and adequate risk reduction by an iterative three-step method are the imperative measures to design a machine to achieve a level of tolerable risk.

To implement risk assessment and risk reduction, the following actions should be taken by the designer in the order given (see [Figure 2](#)):

- a) determine the limits of the machinery, which includes the intended use and any reasonably foreseeable misuse thereof;
- b) identify the hazards and associated hazardous situations;
- c) estimate the risk for each identified hazard and hazardous situation;
- d) evaluate the risk and decision whether a risk reduction is needed or not;
- e) eliminate the hazard or reduction of the risk associated with the hazard by means of protective measures/risk reduction measures.

NOTE 1 For the purposes of this document, the terms “protective measure” (see ISO 12100:2010, 3.19) and “risk reduction measure” are synonymous and referred to any action or means used to eliminate hazards and/or reduce risks.

Actions a) to d) are related to risk assessment and action e) to risk reduction.

Risk assessment is a series of logical steps to enable, in a systematic way, the identification of hazards as well as the estimation and evaluation of the risks associated with machinery.


As a result of the risk assessment, the hazards requiring risk reduction are determined. Iteration of the process of risk assessment can be necessary to eliminate newly generated hazards as far as reasonably practicable or to adequately reduce associated risks by the implementation of protective measures/risk reduction measures in order to achieve tolerable risk.

Protective measures/risk reduction measures are the combination of the measures implemented by the designer and the user in accordance with [Figure 3](#). Measures which can be incorporated at the design stage are preferable to those implemented by the user and usually prove more effective.

The objective to be met is the greatest practicable risk reduction. The strategy defined in this clause is represented by the flowchart in [Figure 2](#). The process itself is iterative and several successive applications can be necessary to reduce the risk, making the best use of available technology. In carrying out this process, it is necessary to take into account these four factors, in the following order of preference:


- the safety of the machine during all the phases of its life cycle;
- the ability of the machine to perform its function;
- the usability of the machine;
- the manufacturing, operational and dismantling costs of the machine.

NOTE 2 The ideal application of these principles requires knowledge of the machine design and its intended use, the practical use of the machine, the accident history and health records, available risk reduction techniques, and the legal framework in which the machine is intended to be used (placed on the market).

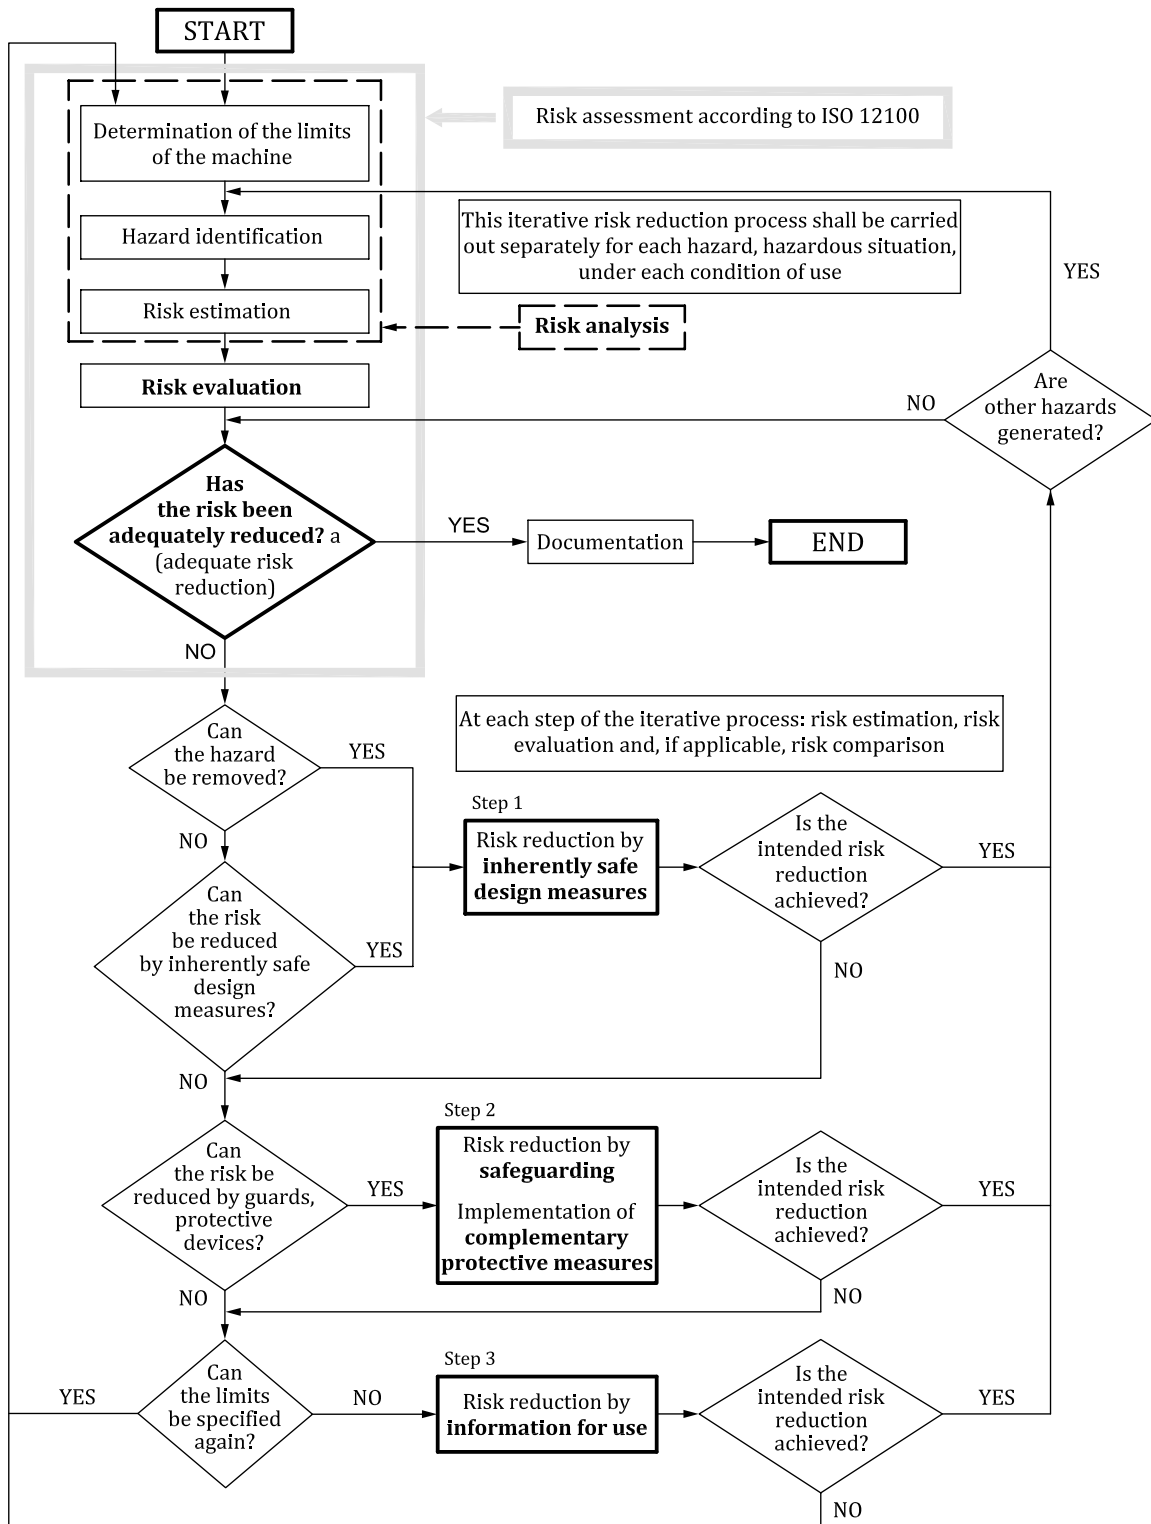

^a The first time the question is asked, it is answered by the result of the initial risk assessment. For further information, see [Annex A](#).

Figure 2 — Schematic representation of risk assessment and risk reduction process including iterative three-step method according to ISO 12100:2010, Figure 1

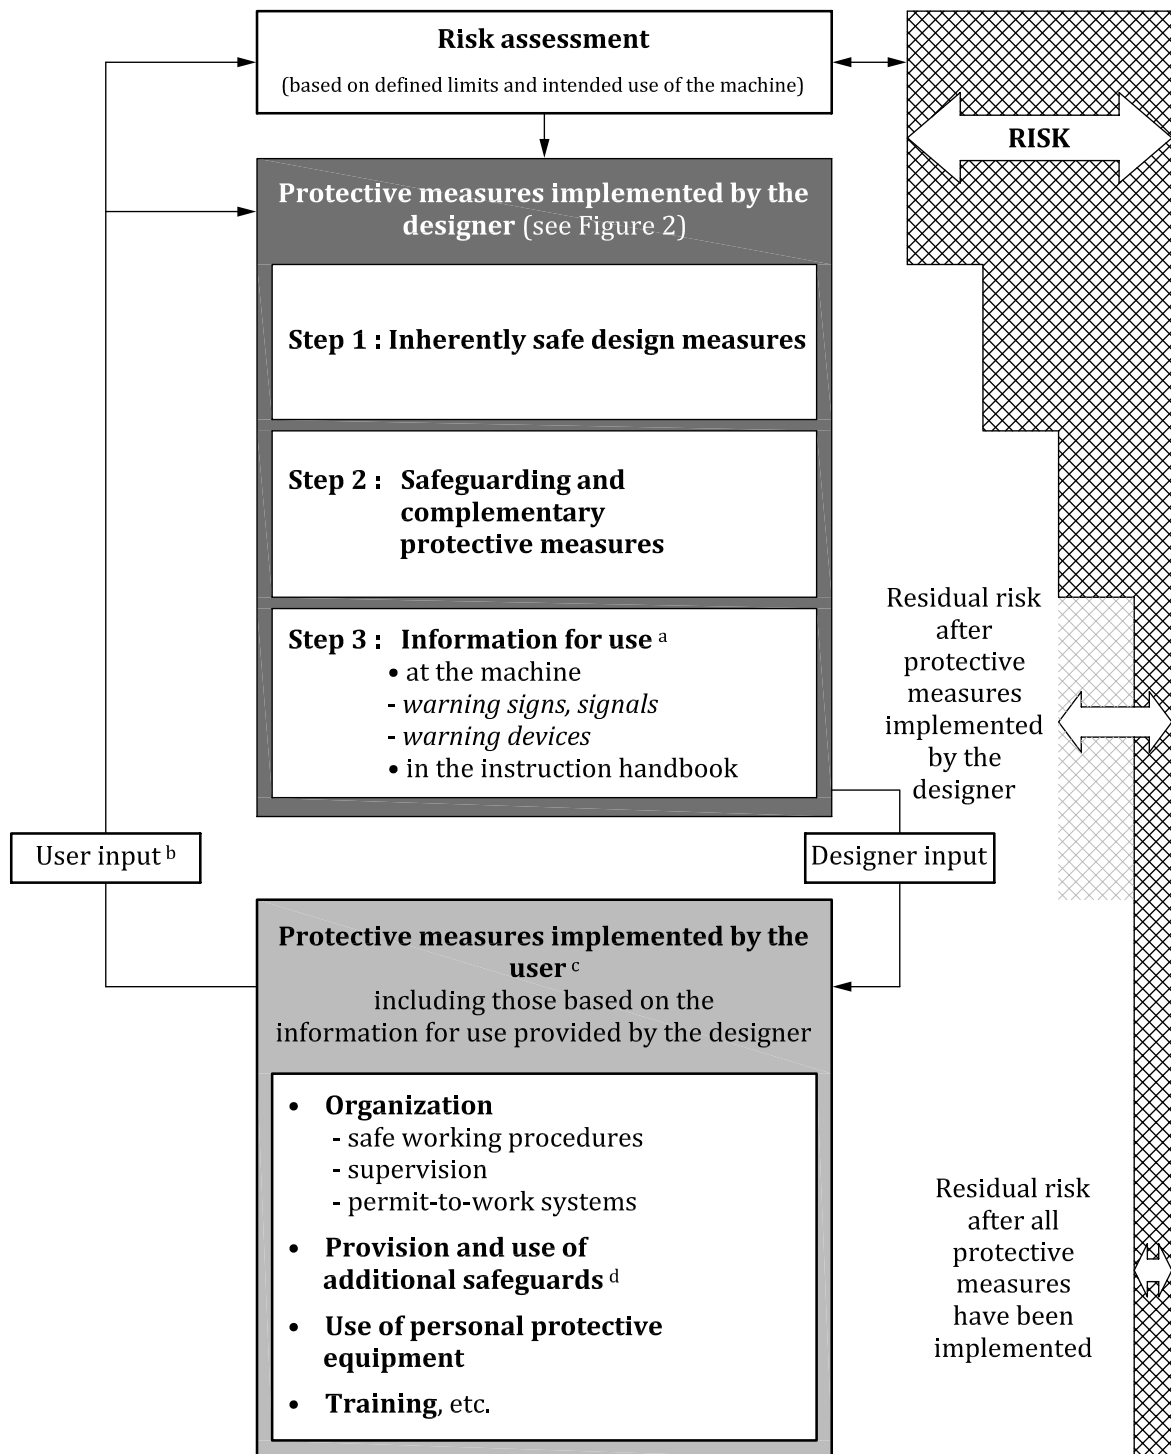

Key

- ^a Providing proper information for use is part of the designer's contribution to risk reduction, but the protective measures concerned are only effective when implemented by the user.
- ^b The user input is that information received by the designer from either the user community regarding the intended use of the machine in general or that which is received from a specific user.
- ^c There is no hierarchy between the various protective measures implemented by the user. These protective measures are outside the scope of this document.
- ^d Those protective measures required due to specific process(es) not envisaged in the intended use of the machine or to specific conditions for installation that cannot be controlled by the designer.

Figure 3 — Risk reduction process from the point of view of the designer (see also

ISO 12100:2010, Figure 2)

5.2 Type-B standards

5.2.1 General

According to ISO 12100, type-B standards deal either with one safety aspect (type-B1 standard) or one type of safeguard that can be used across a wide range of machinery (type-B2 standard). Type-B standards are intended to support the principle strategy from ISO 12100 in order to:

- help determine if a hazard exists, for example, ISO 13857; and
- provide concrete information/measures to perform risk reduction, for example, ISO 14120.

5.2.2 Type-B1 standards

Type-B1 standards deal with particular safety aspects (for example, safety distances, surface temperature, noise) and define by data and/or methodology how these can be addressed. Type-B1 standards can be used directly by the designer/manufacturer or by reference in (a) type C standard(s), including, where relevant, means of verification.

5.2.3 Type-B2 standards

Type-B2 standards provide the performance requirements for the design and construction of particular safeguards (for example, two-hand control devices, interlocking devices, pressure-sensitive protective devices, guards). Type-B2 standards can be applied either directly by the designer/manufacturer or by reference in (a) type-C standard(s). Together with those performance requirements, type-B2 standards specify, where relevant, means of verification.

5.3 Type-C standards

5.3.1 General

According to ISO 12100, type-C standards provide detailed safety requirements for particular machinery or group of machinery.

NOTE The term “group of machinery” means machinery having a similar intended use and similar hazards, hazardous situations, or hazardous events.

Type-C standards are machine specific. Their scope is determining the limits of the machinery and the significant hazards covered.

Type-C standards are written by a team of technical experts (in particular, from machine manufacturers and representatives from health and safety bodies) knowledgeable in the machine design (intended use), the practical use of the machine, the accident history and health records, available risk reduction techniques, and the legal frameworks in which the machine is intended to be used (placed on the market).

Type-C standards deal with all the significant hazards of a particular machine by:

- referencing relevant and applicable type-B standards;
- referencing other standards (e.g. a type-C standard), where such significant hazards are adequately dealt with;
- specifying safety requirements in the standard, when reference to other standards is not possible or not sufficient and where risk assessment and priorities show this is required; and

- dealing as far as possible with objectives rather than design prescriptive details to minimize restrictions on design.

5.3.2 Content provided by type-C standards

Type-C standards clearly establish the following:

- the scope (limits of the machinery);
- the significant hazard(s);
- the requirements prescribing protective measures/risk reduction measures which add value to relevant clauses of ISO 12100 originating from the significant hazard(s);
- the means of verifying the protective measures/risk reduction measures.

NOTE Where possible, a type-C standard deals with all significant hazards identified as arising from the use of the machine. The justifiable exception to this comprehensive treatment of significant hazards is where a type-C standard deals with one or more hazard(s) that are sufficiently important to require special treatment. Where a type-C standard deals with specific hazard(s), this is indicated clearly in the title and scope (e.g. Safety of textile machines — Measurement of noise). Where it is decided not to deal with all significant hazards (e.g. by lack of knowledge or because this causes an unacceptable delay in the drafting of the standard), this is indicated clearly in the scope.

It is a basic principle that type-C standards contain sufficient added value to the requirements of existing type-A and type-B standards. Added value normally consists of a description of specific protective measure(s)/risk reduction measure(s) dealing with the significant hazard. However, this can also include reference to type-B standards or to other reference standards.

5.3.3 Deviations in a type-C standard from a type-B standard

Because of the large variety of machinery, type-C standards can deviate from one or more technical requirements covered by a type-B standard. In those cases, the existing machine specific type-C standard takes precedence over the type-B standard.

6 Practical application of ISO 12100, type-B and type-C standards in order to design a machine to achieve a level of tolerable risk by adequate risk reduction

6.1 General

The system of type-A, type-B and type-C standards is intended to provide one means for designers and manufacturers to develop machinery that can be used to achieve a level of tolerable risk by adequate risk reduction.

[Figure 4](#) shows the recommended steps for the practical use of ISO 12100 and existing type-B and type-C standards within this system.

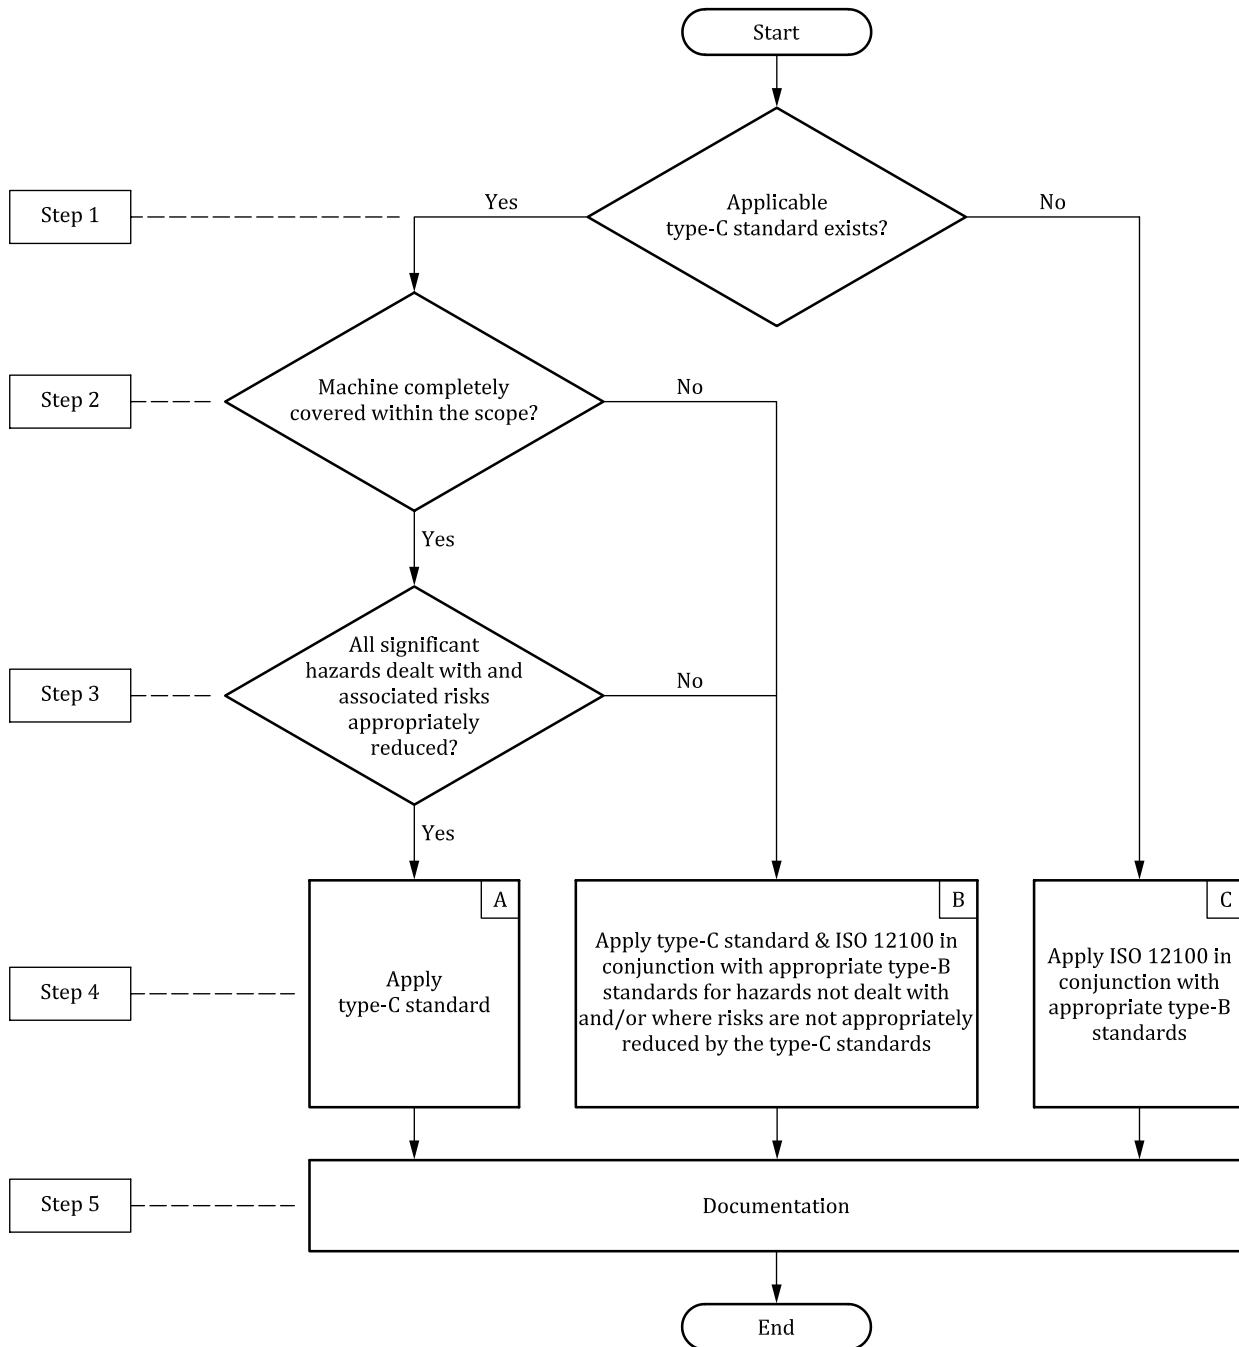


Figure 4 — Recommended steps for the practical use of ISO 12100 and existing type-B and type-C standards within this system

6.2 Application of an appropriate type-C standard

6.2.1 General

The process of risk assessment is facilitated by the application of type-C standards, since these standards for machinery identify the significant hazards that are generally associated with the category of machinery concerned and specify protective measures/risk reduction measures to deal with them. It is assumed that a type-C standard is the result of a risk assessment process carried out by a team of technical experts familiar with the machine in question. However, the application of type-C standards does not dispense the machinery manufacturer from the obligation to carry out a risk assessment according to ISO 12100.

Therefore, a manufacturer who applies the requirements of a type-C standard should ensure that the type-C standard is appropriate to the particular machinery concerned and covers all of the risks it presents. If the machinery concerned presents hazards that are not covered by that type-C standard, a full risk assessment according to ISO 12100 is required for those hazards and appropriate protective measures/risk reduction measures should be taken to deal with them.

Furthermore, where type-C standards specify several alternative requirements without defining criteria for choice between them, the choice of the appropriate requirement for the machinery concerned should be based on a specific risk assessment.

6.2.2 Steps to be followed

Step 1 — Search for a type-C standard

Machine designers and manufacturers should search for an appropriate type-C standard because it provides the most relevant guidance regarding safety of machinery for a particular machine.

Step 2 — Check the scope

If an appropriate type-C standard exists for the machine in question, the designer/manufacturer needs to check carefully if the scope of this type-C standard is fully covering the actual machine in question regarding the limits of the machine (this corresponds to ISO 12100:2010, 5.3).

Step 3 — Check significant hazards according to the type-C standard

If the outcome of step 2 shows that an appropriate type-C standard exists for the machine in question, the designer/manufacturer needs to check carefully that this type-C standard is covering all significant hazards to be associated with the actual machine in question and its application (this corresponds to ISO 12100:2010, 5.4). In addition, the designer should check carefully that the protective measures/risk reduction measures specified in the type-C standard are appropriate for the application to the particular machine in question.

NOTE Through this process, the risk estimation (see ISO 12100:2010, 5.5) is already covered. For those significant hazards covered by a type-C standard, individual risk estimation by the designer/manufacturer is not necessary anymore.

Step 4A — Application of type-C standard

If steps 2 and 3 are fulfilled, the protective measures/risk reduction measures contained in the type-C standard should be applied (This corresponds to ISO 12100:2010, Clause 6).

The application of the protective measures/risk reduction measures specified in the type-C standard is assumed to achieve tolerable risk for the particular machine in question by adequate risk reduction.

Next, go to step 5.

Step 4B — Application of type-C standard plus determination of any machine parts outside the scope of the type-C standard and identification of related additional hazards

In case one or both of step 2 and step 3 are not fulfilled, the designer/manufacturer should determine which parts of the machine in question and/or which significant hazard(s) need to be considered in addition to the chosen (appropriate) type-C standard.

For those parts of the machine in question and/or significant hazard(s) not covered by the chosen (appropriate) type-C standard, the principle process of risk assessment and risk reduction according to ISO 12100 (see [Figure 2](#)) should be applied. This should be done with the help of relevant type-B standards.

In addition, the designer/manufacturer may specify other protective measures/risk reduction measures independent from existing safety standards.

Next, go to step 5.

Step 4C — Application of risk assessment and risk reduction process according to ISO 12100 supported by type-B standards

For machines not covered by an applicable type-C standard, the principle process of risk assessment and risk reduction according to ISO 12100 (see [Figure 2](#)) should be applied.

Appropriate type-B standards can be used to perform this process.

For the risk assessment process as such, practical guidance and examples of methods are given in ISO/TR 14121-2.

Further, type-B1 standards (e.g. ISO 13732-1) are helpful to evaluate hazardous situations.

When the significant hazard(s) are identified as a result of the risk assessment, appropriate type-B1 and type-B2 standards can be used to specify effective measures for risk reduction.

NOTE In order to facilitate the search for those appropriate type-B standards, [Clause 7](#) provides an overview of what standard(s) exist for which kind of hazard category.

In addition, the designer/manufacturer may specify other protective measures/risk reduction measures independent from existing safety standards.

As a result of this process, it is assumed that the particular machine in question results in a design of the machine that can be used with tolerable risk achieved by adequate risk reduction.

Next, go to step 5.

Step 5 — Documentation

Detailed documentation of how step 1 to step 4 have been applied should show that the particular machine in question is designed to a level of tolerable risk achieved by adequate risk reduction.

7 Navigating appropriate type-B machinery safety standards

Machinery suppliers should identify and apply the appropriate type-B machinery safety standards. Standards can be grouped by type of hazard(s) or topic(s) addressed in the standard. [Figure 5](#) outlines the structure of many ISO standards and can aid in navigating the standards.

NOTE [Figure 5](#) provides a principle overview on existing categories of type-B standards but makes no claim to give a complete list of all currently existing type-B standards. See Bibliography for the type-B standards referred to in [Figure 5](#).


GENERAL PRINCIPLES FOR DESIGN - RISK ASSESSMENT & RISK REDUCTION ISO 12100 (TYPE-A STANDARD)							
TYPE-B STANDARDS RELATED TO HAZARDS		TYPE-B STANDARDS RELATED TO ASPECTS AND TECHNOLOGY		TYPE-B STANDARDS RELATED TO HAZARDS		TYPE-B STANDARDS RELATED TO ASPECTS AND TECHNOLOGY	
NOISE	SUBSTANCES	VIBRATION & SHOCK	DIMENSIONS & DISTANCES	POWER SOURCE	SAFETY DEVICES	CONTROL SYSTEMS	ASSEMBLY OF MACHINERY
Determination of emission sound pressure levels at a workstation <i>ISO 11200, ISO 11201 to ISO 11205</i>	Evaluation of emission of airborne hazardous substances <i>ISO 29042 series</i>	Whole body vibration <i>ISO 2631 series</i>	Gaps to avoid crushing <i>ISO 13854</i>	Electrical equipment <i>IEC 60204-1</i>	Guards <i>ISO 14120</i>	Avoidance of unexpected start-up <i>ISO 14118</i>	Pressure-sensitive protective devices <i>ISO 13856 series</i>
Determination of sound power & energy levels <i>ISO 3741, ISO 3743-1, ISO 3744, ISO 3745, ISO 3746, ISO 3747</i>	Reduction of risks to health from hazardous substances <i>ISO 14123-1, ISO 14123-2</i>	Hand-arm vibration <i>ISO 13753</i>	Minimum distances <i>ISO 13855</i>	Pneumatic equipment <i>ISO 4414</i>	Interlocking devices <i>ISO 14119</i>	Design of safety-related parts of control systems <i>ISO 13849-1</i>	Integrated manufacturing systems <i>ISO 11161</i>
Determination of sound power levels by sound intensity <i>ISO 9614 series</i>	Hygiene requirements <i>ISO 14159</i>	Hand-held & hand-guided machinery <i>ISO 20643</i>	Safety distances <i>ISO 13857</i>	Hydraulic equipment <i>ISO 4413</i>	Two-hand control devices <i>ISO 13851</i>	Validation of safety-related parts of control systems <i>ISO 13849-2</i>	Emergency stop function <i>ISO 13850</i>
Insulation performances of enclosures <i>ISO 11546 series</i>	THERMAL HAZARDS	ERGONOMICS	Permanent means of access <i>ISO 14122 series</i>		Electro-sensitive protective equipment <i>IEC 61496 series</i>		
Insulation performances of cabins <i>ISO 11957</i>	Human responses to contact with hot surfaces <i>ISO 13732-1</i>	Access openings <i>ISO 15534</i>	ALARMS & WARNINGS		Pressure-sensitive protective devices <i>ISO 13856 series</i>		
Declaration & verification of noise emission <i>ISO 4871</i>	FIRE HAZARDS	Anthropometric requirements for workstations <i>ISO 14738</i>	Design principles for safety signs <i>ISO 3864-1</i>				
	Fire prevention and protection <i>ISO 19353</i>	Computer manikins and body templates <i>ISO 15536-1</i>	Registered safety signs <i>ISO 7010</i>				
	ELECTRICAL HAZARDS	RADIATION HAZARDS	Auditory danger signals <i>ISO 7731</i>				
	Protection against electric shock <i>IEC 60204-1</i>	Lasers and laser-related equipment - Generals <i>ISO 11145</i>	Visual, acoustic and tactile signals <i>IEC 61310-1</i>				

Figure 5 — Overview of type-B standards grouped by hazard category and aspects and technology (not exhaustive)

Annex A (informative)

Iterative process of risk assessment and risk reduction

Figure A.1 shows another representation of the risk assessment process that links the processes shown in ISO 12100 and ISO/IEC Guide 51.

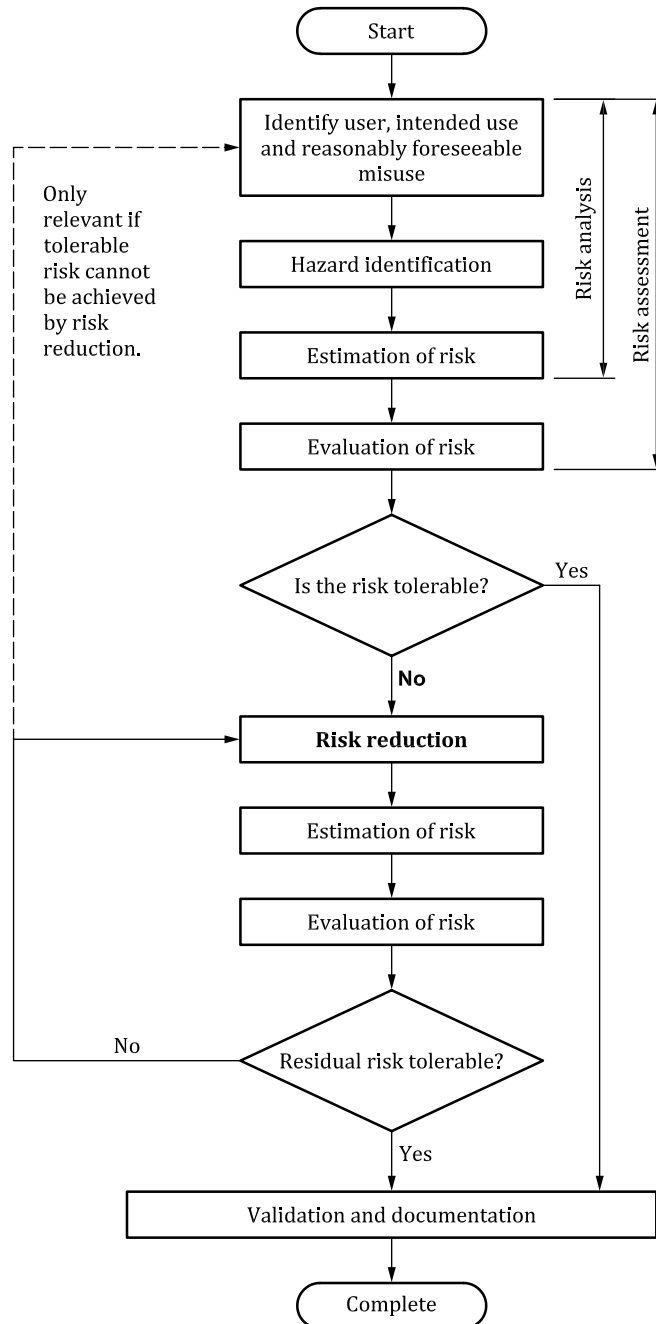

NOTE Validation is used in Figure A.1 synonymous to verification in ISO 12100.

Figure A.1 — Iterative process of risk assessment and risk reduction according to ISO/IEC Guide 51:2014, Figure 2

Annex B (informative)

Types of ISO documents

[Table B.1](#) shows the different types of documents that can be developed in the context of machinery safety standardization.

Table B.1 — Types of ISO documents

ISO document	General description
International Standard	Contains safety requirements and recommendations, written primarily for machinery suppliers. Includes three types: — type-A; — type-B1 and type-B2; — type-C.
Technical Specification (TS)	Contains requirements for provisional application on a particular machine or system, written primarily for machinery suppliers.
Technical Report (TR)	Contains guidance information, written primarily for machinery suppliers and standard writers. TRs contain information (advisory) which is not normative (required).
Guide	Contains informative guidance information, written primarily for standards writers.

See ISO/IEC Directives Part 1 for more details.

Bibliography

- [1] ISO/IEC Guide 51:2014, *Safety aspects — Guidelines for their inclusion in standards*
- [2] ISO Guide 78, *Safety of machinery — Rules for drafting and presentation of safety standards*
- [3] ISO 2631 (all parts), *Mechanical vibration and shock — Evaluation of human exposure to whole-body vibration*
- [4] ISO 3741, *Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Precision methods for reverberation test rooms*
- [5] ISO 3743-1, *Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Engineering methods for small movable sources in reverberant fields — Part 1: Comparison method for a hard-walled test room*
- [6] ISO 3744, *Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Engineering methods for an essentially free field over a reflecting plane*
- [7] ISO 3745, *Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Precision methods for anechoic rooms and hemi-anechoic rooms*
- [8] ISO 3746, *Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Survey method using an enveloping measurement surface over a reflecting plane*
- [9] ISO 3747, *Acoustics — Determination of sound power levels and sound energy levels of noise sources using sound pressure — Engineering/survey methods for use in situ in a reverberant environment*
- [10] ISO 3864-1, *Graphical symbols — Safety colours and safety signs — Part 1: Design principles for safety signs and safety markings*
- [11] ISO 4413, *Hydraulic fluid power — General rules and safety requirements for systems and their components*
- [12] ISO 4414, *Pneumatic fluid power — General rules and safety requirements for systems and their components*
- [13] ISO 4871, *Acoustics — Declaration and verification of noise emission values of machinery and equipment*
- [14] ISO 7010, *Graphical symbols — Safety colours and safety signs — Registered safety signs*
- [15] ISO 7731, *Ergonomics — Danger signals for public and work areas — Auditory danger signals*
- [16] ISO 9614 (all parts), *Acoustics — Determination of sound power levels of noise sources using sound intensity*
- [17] ISO 11145, *Optics and photonics — Lasers and laser-related equipment — Vocabulary and symbols*
- [18] ISO 11161, *Safety of machinery — Integrated manufacturing systems — Basic requirements*
- [19] ISO 11200, *Acoustics — Noise emitted by machinery and equipment — Guidelines for the use of basic standards for the determination of emission sound pressure levels at a work station and at other specified positions*
- [20] ISO 11201, *Acoustics — Noise emitted by machinery and equipment — Determination of emission sound pressure levels at a work station and at other specified positions in an essentially free field over a reflecting plane with negligible environmental corrections*

- [21] ISO 11202, *Acoustics — Noise emitted by machinery and equipment — Determination of emission sound pressure levels at a work station and at other specified positions applying approximate environmental corrections*
- [22] ISO 11203, *Acoustics — Noise emitted by machinery and equipment — Determination of emission sound pressure levels at a work station and at other specified positions from the sound power level*
- [23] ISO 11204, *Acoustics — Noise emitted by machinery and equipment — Determination of emission sound pressure levels at a work station and at other specified positions applying accurate environmental corrections*
- [24] ISO 11205, *Acoustics — Noise emitted by machinery and equipment — Engineering method for the determination of emission sound pressure levels in situ at the work station and at other specified positions using sound intensity*
- [25] ISO 11546 (all parts), *Acoustics — Determination of sound insulation performances of enclosures*
- [26] ISO 11957, *Acoustics — Determination of sound insulation performance of cabins — Laboratory and in situ measurements*
- [27] ISO 13732-1, *Ergonomics of the thermal environment — Methods for the assessment of human responses to contact with surfaces — Part 1: Hot surfaces*
- [28] ISO 13753, *Mechanical vibration and shock — Hand-arm vibration — Method for measuring the vibration transmissibility of resilient materials when loaded by the hand-arm system*
- [29] ISO 13849-1, *Safety of machinery — Safety-related parts of control systems — Part 1: General principles for design*
- [30] ISO 13849-2, *Safety of machinery — Safety-related parts of control systems — Part 2: Validation*
- [31] ISO 13850, *Safety of machinery — Emergency stop function — Principles for design*
- [32] ISO 13851, *Safety of machinery — Two-hand control devices — Principles for design and selection*
- [33] ISO 13854, *Safety of machinery — Minimum gaps to avoid crushing of parts of the human body*
- [34] ISO 13855, *Safety of machinery — Positioning of safeguards with respect to the approach speeds of parts of the human body*
- [35] ISO 13856 (all parts), *Safety of machinery — Pressure-sensitive protective devices*
- [36] ISO 13857, *Safety of machinery — Safety distances to prevent hazard zones being reached by upper and lower limbs*
- [37] ISO 14118, *Safety of machinery — Prevention of unexpected start-up*
- [38] ISO 14119, *Safety of machinery — Interlocking devices associated with guards — Principles for design and selection*
- [39] ISO 14120, *Safety of machinery — Guards — General requirements for the design and construction of fixed and movable guards*
- [40] ISO/TR 14121-2, *Safety of machinery — Risk assessment — Part 2: Practical guidance and examples of methods*
- [41] ISO 14122 (all parts), *Safety of machinery — Permanent means of access to machinery*
- [42] ISO 14123-1, *Safety of machinery — Reduction of risks to health resulting from hazardous substances emitted by machinery — Part 1: Principles and specifications for machinery manufacturers*
- [43] ISO 14123-2, *Safety of machinery — Reduction of risks to health resulting from hazardous substances emitted by machinery — Part 2: Methodology leading to verification procedures*

- [44] ISO 14159, *Safety of machinery — Hygiene requirements for the design of machinery*
- [45] ISO 14738, *Safety of machinery — Anthropometric requirements for the design of workstations at machinery*
- [46] ISO 15534 (all parts), — *Ergonomic design for the safety of machinery*
- [47] ISO 15536-1, *Ergonomics — Computer manikins and body templates — Part 1: General requirements*
- [48] ISO 19353, *Safety of machinery — Fire prevention and fire protection*
- [49] ISO 20643, *Mechanical vibration — Hand-held and hand-guided machinery — Principles for evaluation of vibration emission*
- [50] ISO 29042 (all parts), *Safety of machinery — Evaluation of the emission of airborne hazardous substances*
- [51] IEC 61310-1, *Safety of machinery — Indication, marking and actuation — Part 1: Requirements for visual, acoustic and tactile signals*
- [52] IEC 60204-1, *Safety of machinery — Electrical equipment of machines — Part 1: General requirements*
- [53] IEC 61496 (all parts), *Safety of machinery — Electro-sensitive protective equipment*

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 2016* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website-www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: MED 40 (24384).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002

Telephones: 2323 0131, 2323 3375, 2323 9402

Website: www.bis.gov.in

Regional Offices:

	Telephones
Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002	{ 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091	{ 2367 0012 2320 9474
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019	{ 265 9930
Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 600113	{ 2254 1442 2254 1216
Western : Manakalya, 4 th Floor, NTH Complex (W Sector), F-10, MIDC, Andheri (East), Mumbai 400093	{ 283 25838

Branches : AHMEDABAD, BENGALURU, BHOPAL, BHUBANESHWAR, CHANDIGARH, CHENNAI, COIMBATORE, DEHRADUN, DELHI, FARIDABAD, GHAZIABAD, GUWAHATI, HARYANA (CHANDIGARH), HUBLI, HYDERABAD, JAIPUR, JAMMU, JAMSHEDPUR, KOCHI, KOLKATA, LUCKNOW, MADURAI, MUMBAI, NAGPUR, NOIDA, PARWANOO, PATNA, PUNE, RAIPUR, RAJKOT, SURAT, VIJAYAWADA.