

**BUREAU OF INDIAN STANDARDS**

DRAFT FOR COMMENTS ONLY

*Not to be reproduced without permission of BIS or use as Standard.*

**Doc. PGD 41 (25560) WC**

**May 2024**

*भारतीय मानक मसौदा*

**फुलाने योग्य गेंदें — विशिष्टि**

*Draft Indian Standard*

**INFLATABLE BALLS — SPECIFICATION**

ICS 97.220.40; 97.220.30

Sports Goods Sectional Committee, PGD 41

Last date for comments: **10<sup>th</sup> July 2024**

**FOREWORD**

*(Formal clause will be added later on.)*

Football, volleyball, basketball, netball, throwball, water polo balls, and handball are specialized spherical objects designed for their respective sports. Each ball is manufactured to meet the unique demands of its sport, enabling players to perform at their best. Inflatable balls were earlier covered under following Indian Standards which have been now amalgamated into one standard:

- a) IS 417 (Part 1) : 2003 Footballs, volleyballs, basketballs, netballs, throwballs and water - Polo balls - Specification: Part 1 footballs (*Fourth Revision*)
- b) IS 417 (Part 2) : 1986 Specification for footballs, volleyballs, basketballs, netballs, throwballs and water - Polo balls: Part 2 volleyballs (*Fourth Revision*)
- c) IS 417 (Part 3) : 1986 Specification for footballs, volleyballs, basketballs, netballs, throwballs and water - Polo balls: Part 3 basketballs (*Fourth Revision*)
- d) IS 417 (Part 4) : 1976 Specification for footballs, volleyballs, basketballs, netballs, throwballs and water - Polo balls - Part iv : netballs (*Third Revision*)
- e) IS 417 (Part 5) : 1976 Specification for footballs, volleyballs, basketballs, netballs, throwballs, and water - Polo balls - Part v : throwballs (*Third Revision*)
- f) IS 417 (Part 6) : 1976 Specification for footballs, volleyballs, basketballs, netballs, throwballs and water - Polo balls - Part vi : water - Polo balls (*Third Revision*)
- g) IS 11729 : 1986 Specification for handballs

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 2022 'Rules for rounding off numerical values (*second revision*)

## **INFLATABLE BALLS — SPECIFICATION**

### **1 SCOPE**

This standard specifies the requirements for indoor and outdoor footballs, volleyballs, basketballs, netball, throwballs, water-polo ball and handball.

### **2 TERMINOLOGY**

**2.1 Linear Variable Differential Transfer (LVDT)** — It is an electromechanical sensor used to convert mechanical motion like rectilinear motion, into a variable electrical current, voltage or electric signals, and the reverse.

**2.2 Stem** — The bottom portion of LVDT, which rest on the ball while taking measurement.

**2.3 Setting Block** — Gauge used for setting the initial position of LVDT.

**2.4 Indoor Balls** — These balls are meant for playing indoor games.

**2.5 Outdoor Balls** — These balls are meant for playing outdoor games.

### **3 CLASSIFICATION**

**3.1** Inflatable balls are classified into following four different levels based on the level of playing as given below:

- a) Level 1 — Recommended for match level games.
- b) Level 2 — Recommended for training level games.
- c) Level 3 — Recommended for beginner level games.
- d) Level 4 — Recommended for recreation level games.

**3.2** Handballs are classified into following categories based on the sizes of ball:

- a) Size 3 — Recommended for men.
- b) Size 2 — Recommended for women.
- c) Size 1 — Recommended for junior.

**3.3** Different types of inflatable balls are further classified into different sizes. Different levels and different sizes of balls shall conform to the requirements listed in Table 1 to Table 8.

### **4 REQUIREMENTS**

#### **4.1 Materials**

##### **4.1.1** *Top Layer*

The top layer of ball shall be made of rubber, synthetic materials, polyurethane (PU), synthetic leather, natural leather, thermoplastic polyurethane (TPU), polyvinyl chloride (PVC) or any other suitable material.

##### **4.1.2** *Bladder*

Bladder shall be made of natural latex, synthetic latex, natural rubber, synthetic rubber or a combination of any of these.

#### **4.1.3 *Prints and Cosmetics***

Non-toxic inks, pigments or solvents shall be used.

#### **4.1.4 *Stitching/Winding Thread***

Thread shall be made of polyester, cotton, nylon, or mix thread. Thread shall consist of 1 to 8 ply.

#### **4.1.5 *Glue***

Any form of bonded latex, water based or solvent based adhesives shall be used.

### **4.2 Surface Texture**

The surface of the inflatable ball shall have smooth, grained, dimpled, or shiny texture.

### **4.3 Weight**

The weight of different levels and different sizes of inflatable balls shall conform to the values specified in Table 1 to Table 8.

## **5 MANUFACTURING AND WORKMANSHIP**

**5.1** Inflatable balls can be manufactured from any of the following construction methods:

- a) Moulded,
- b) Hand-stitched,
- c) Machine-stitched, and
- d) Laminated

**5.1.1** The ball shall be made from suitable number of panels of shapes capable of giving roundness. It is recommended to have minimum 6 number of panels and maximum 32 number of panels except for basketball. It is recommended to have minimum 8 number of panels and maximum 18 number of panels for basketball.

### **5.2 Mouth**

The mouth shall be adequate and permit the nozzle of the inflating pump or needle to be accommodated and suitable means shall be provided to deflate the ball.

## **6 PERFORMANCE TEST**

### **6.1 Rebound Test**

This test is only applicable for indoor football, outdoor football, volleyball, and basketball. The ball shall be tested according to the method prescribed in Annex A. The value of rebound for different types of inflatable balls shall conform to the values as given in from Table 1 to Table 8, wherever applicable.

### **6.2 Circumference and Roundness Test**

The ball shall be tested according to the method prescribed in Annex B. The value of the circumference and roundness for different types of inflatable balls shall conform to the values given in from Table 1 to Table 8.

### **6.3 Water Absorption Test**

The ball tested according to the method prescribed in Annex C. The value of water absorption for different types of inflatable balls shall conform to the values as given in from Table 1 and Table 2.

### **6.4 Loss of Pressure**

This test ensures that the ball does not deflate too quickly. The ball shall be inflated to a defined pressure using a compressed air. A pressure gauge of 1.5 bar with an accuracy of  $\pm 0.01$  bar shall be used for measuring the pressure.

Note — 1 bar =  $10^5$  Pa

**6.4.1** Different level of outdoor footballs, basketball, water-polo ball, and handball shall be inflated to the following pressure:

- a) Level 1             $0.8 \pm 0.1$  bar
- b) Level 2             $0.8 \pm 0.1$  bar
- c) Level 3             $0.5 \pm 0.1$  bar
- d) Level 4             $0.5 \pm 0.1$  bar

**6.4.2** The indoor footballs of all levels shall be inflated to  $0.6 \pm 0.1$  bar.

**6.4.3** Volleyball of all level shall be inflated to  $0.3 \pm 0.05$  bar.

**6.4.4** Different level of netball, and throwball shall be inflated to the following pressure:

- a) Level 1             $0.8 \pm 0.1$  bar
- b) Level 2             $0.6 \pm 0.1$  bar
- c) Level 3             $0.5 \pm 0.1$  bar

All level and sizes of balls are then stored at temperature of  $27 \pm 2^\circ\text{C}$  and a humidity of  $65 \pm 5$  percent for 72 hours, after which the pressure is measured again. The percentage change in loss of pressure for inflatable balls shall not be more than as given in Table 1 to Table 8, wherever applicable.

**Table 1 Requirements for Outdoor Footballs**  
( Clauses 4.3 and 6)

<b>Sl No.</b>	<b>Size</b>	<b>Requirements</b>	<b>Level 1</b>	<b>Level 2</b>	<b>Level 3</b>	<b>Level 4</b>
(1)	(2)	(3)	(4)	(5)	(6)	(7)
i)	Size 5	Weight, g	410-450	400-450	400-450	300-450
ii)		Circumference, cm	68-70	68-70	68-70	67-71
iii)		Rebound/ Bounce, cm	115-155	110-150	100-150	70-150
iv)		Water absorption, percent, <i>Max</i>	15	20	35	40
v)		Roundness, percent, <i>Max</i>	2	2.5	4.0	4.0
vi)		Loss of pressure, percent, <i>Max</i>	25	30	35	40
vii)	Size 4	Weight, g	350-390	340-400	340-400	280-400
viii)		Circumference, cm	63.50-66	63-66	63-66	62-66
ix)		Rebound/ Bounce, cm	110-160	100-160	90-160	70-150
x)		Water absorption, percent, <i>Max</i>	20	25	35	40
xi)		Roundness, percent, <i>Max</i>	2.5	3.0	4.0	4.0
xii)		Loss of pressure, percent, <i>Max</i>	25	30	35	40
xiii)	Size 3	Weight, g	-	300-350	280-350	250-350
xiv)		Circumference, cm	-	58-60	57-60	57-60
xv)		Rebound/ Bounce, cm	-	70-150	70-150	70-150
xvi)		Water absorption, percent, <i>Max</i>	-	35	35	40
xvii)		Roundness, percent, <i>Max</i>	-	4	4	4
	Size 2	Weight, g	-	-	190-250	140-200
		Circumference, cm	-	-	51-55	50-56
		Rebound/ Bounce, cm	-	-	60-150	60-150
		Water absorption, percent, <i>Max</i>	-	-	40	40
		Roundness, percent, <i>Max</i>	-	-	5	5
	Size 1	Weight, g	-	-	-	110-150
		Circumference, cm	-	-	-	43-49
		Rebound/ Bounce, cm	-	-	-	50-150
		Water absorption, percent, <i>Max</i>	-	-	-	40
		Roundness, percent, <i>Max</i>	-	-	-	5
	Size 0	Weight, g	-	-	-	40-110
		Circumference, cm	-	-	-	34-40

**Table 2 Requirements for Indoor Footballs**  
(Clauses 4.3 and 6)

Sl. No.	Requirements	Level 1	Level 2	Level 3
(1)	(2)	(3)	(4)	(5)
i)	Weight, g	410-440	400-440	400-450
ii)	Circumference, cm	62-64	62-64	61-64
iii)	Rebound/ Bounce, cm	55-70	55-80	55-80
iv)	Roundness, percent, <i>Max</i>	2.0	2.5	4.0
v)	Loss of pressure, percent, <i>Max</i>	25	30	40

**Table 3 Requirements for Volleyballs**  
( Clause 4.3 and 6)

Sl No.	Requirements	Level 1	Level 2	Level 3
(1)	(2)	(3)	(4)	(5)
i)	Weight, g	260-280	260-280	240-300
ii)	Circumference, cm	65-67	65-67	64-67
iii)	Rebound, cm	60-70	50-70	40 or above
iv)	Roundness, Percent, <i>Max</i>	2	3	4
v)	Loss of pressure, Percent, <i>Max</i>	25	30	35

**Table 4 Requirements for Basketballs**  
(Clause 4.3, and 6)

Sl No.	Size	Requirements	Level 1	Level 2	Level 3	Level 4
(1)	(2)	(3)	(4)	(5)	(6)	(7)
i)	Size 7	Weight, g	580-620	580-620	570-650	470-650
ii)		Rebound/ Bounce, cm	100-130	90-130	90-140	60 or above
iii)		Circumference, cm	75-77	75-77	75-77	74-78
v)		Roundness, percent, <i>Max</i>	2.5	3.0	4.0	5.0
vi)		Loss of pressure, percent, <i>Max</i>	15	20	35	40
vii)	Size 6	Weight, g	510-550	510-550	510-550	450-550
viii)		Rebound/ Bounce, cm	100-130	90-130	90-140	60 or above
ix)		Circumference, cm	71-75	71-75	70-75	70-75
xi)		Roundness, percent, <i>Max</i>	2.5	3.0	4.0	5.0
xii)		Loss of pressure, percent, <i>Max</i>	15	20	35	40
xiii)	Size 5	Weight, g	460-500	460-500	450-500	400-500
xiv)		Rebound/ Bounce, cm	100-140	90-130	90-140	60 or above
xv)		Circumference, cm	68-70	68-70	68-70	68-70
xvii)		Roundness, percent, <i>Max</i>	2.5	3.0	4.0	5.0
xviii)		Loss of pressure, percent, <i>Max</i>	15	20	35	40

Size 4	Weight, g	-	-	350-400	300-400
	Rebound/ Bounce, cm	-	-	80-130	60 or above
	Circumference, cm	-	-	63-67	63-67
	Roundness, percent, <i>Max</i>	-	-	4	5
	Loss of pressure, percent, <i>Max</i>	-	-	35	40
Size 3	Weight, g	-	-	300-350	260-350
	Rebound/ Bounce, cm	-	-	80-130	60 or above
	Circumference, cm	-	-	54-57	54-57
	Roundness, percent, <i>Max</i>	-	-	4	5
	Loss of pressure, percent, <i>Max</i>	-	-	35	40
Size 1	Weight, g	-	-	-	130-180
	Rebound/ Bounce, cm	-	-	-	50 or above
	Circumference, cm	-	-	-	40-45
	Roundness, percent, <i>Max</i>	-	-	-	5
	Loss of pressure, percent, <i>Max</i>	-	-	-	40

**Table 5 Requirements for Netball**  
( Clause 4.3 and 6 )

Sl No. (1)	Requirements (2)	Level 1 (3)	Level 2 (4)	Level 3 (5)
i)	Weight, gm	410 - 450	410 - 450	400 – 450
ii)	Circumference, cm	69 - 71	68 - 71	68 – 71
iii)	Roundness, percent, <i>Max</i>	2	3	4

**Table 6 Requirements for Throwballs**  
( Clause 4.3 and 6 )

Sl No. (1)	Requirements (2)	Level 1 (3)	Level 2 (4)	Level 3 (5)
i)	Weight, g	420 - 450	410 - 450	400 - 450
ii)	Circumference, cm	68 - 70	68 -70	68 - 70
iii)	Roundness, percent, <i>Max</i>	1.5	2.0	3.0
iv)	Loss of pressure, percent, <i>Max</i>	25	25	40

**Table 7 Requirements for water polo balls**  
( Clause 4.3, and 6 )

Sl No.	Requirements	Level 1	Level 2	Level 3
(1)	(2)	(3)	(4)	(5)
i)	Weight, g	400-450	400-450	400-450
ii)	Circumference, cm	68-71	68-71	68-71
iii)	Roundness, percent, <i>Max</i>	2.0	2.5	4.0
iv)	Loss of pressure, percent, <i>Max</i>	15	20	30

**Table 8 Requirements for Handballs**  
( Clause 4.3, and 6 )

Sl. No.	Size	Requirements	Level 1	Level 2	Level 3
(1)	(2)	(3)	(4)	(5)	(6)
i)	Size 3	Weight, g	420-475	410-475	400-475
ii)		Circumference, cm	57-60	57-60	57-60
iii)		Roundness, percent, <i>Max</i>	2.5	3.0	4.0
iv)	Size 2	Weight, g	325-375	310-375	300-375
v)		Circumference, cm	53-56	53-56	52-56
vi)		Roundness, percent, <i>Max</i>	2.5	3.0	4.0
vii)	Size 1	Weight, gm	290-330	250-330	250-330
viii)		Circumference, cm	49-52	49-52	48-52
ix)		Roundness, percent, <i>Max</i>	2.5	3.0	4.0

## 7 PACKING AND MARKING

### 7.1 Packing

Each ball shall first be wrapped in a polyethylene, paper, or similar cover and then packed together with other balls similarly wrapped according to the instructions of the purchaser.

### 7.2 Marking

**7.2.1** Each ball or its packaging shall be marked with the following information:

- a) Manufacturer's name, initials or trade-mark;
- b) Ball size and level of ball;
- c) Month and year of manufacturing; and
- d) Batch number/lot number.

#### 7.2.2 BIS Certification Marking



The product(s) conforming to the requirements of this standard may be certified as per the conformity assessment schemes under the provisions of the *Bureau of Indian Standards Act, 2016* and the Rules and Regulations framed thereunder, and the product(s) may be marked with the standard mark.

**ANNEX A**  
( Clause 6.1 )

**REBOUND TEST**

**A-1 PRINCIPLE**

The ball shall satisfy certain requirements of rebound after impact on the ground. The height of the rebound is determined after the impact of a freely falling ball from a specific height onto a suitable horizontal surface and observing the height to which it bounces after the impact.

**A-2 TEST CONDITION**

The ambient temperature during testing shall be  $27 \pm 2^\circ\text{C}$  and humidity of  $65 \pm 5$  percent.

**A-3 INFLATING OF BALL**

**A-3.1** A pressure gauge of  $1.5 \text{ bar}^1$  with an accuracy of  $\pm 0.01 \text{ bar}$  shall be used for measuring the pressure.

**A-3.2** Different level of outdoor football shall be inflated to the following pressure:

- |            |                           |
|------------|---------------------------|
| a) Level 1 | $0.8 \pm 0.1 \text{ bar}$ |
| b) Level 2 | $0.8 \pm 0.1 \text{ bar}$ |
| c) Level 3 | $0.5 \pm 0.1 \text{ bar}$ |
| d) Level 4 | $0.5 \pm 0.1 \text{ bar}$ |

**A-3.3** The indoor footballs of all levels shall be inflated to  $0.6 \pm 0.1 \text{ bar}$ .

**A-3.4** Inflating pressure of basketball varies ball to ball. The basketball shall be inflated to the pressure where the rebound of ball meets the value given in Table 4. Furthermore, the same pressure shall be maintained during the circumference and roundness test (*see 6.2*).

**A-3.4** Volleyball of all level shall be inflated to  $0.3 \pm 0.05 \text{ bar}$ .

Note —  $1 \text{ bar} = 10^5 \text{ Pa}$

**A-4 APPARATUS**

The apparatus shall consist of a sturdy metallic framework having a rigid and flat impact surface of steel plate of at least 20 mm thickness, rigidly connected to a solid underground of at least 500 kg. A vertical scale graduated in centimetres to indicate the height of rebound, and an adjustable guide plate from which the ball can be dropped. The typical diagram used for measuring the rebound of balls is given in Fig. 1.

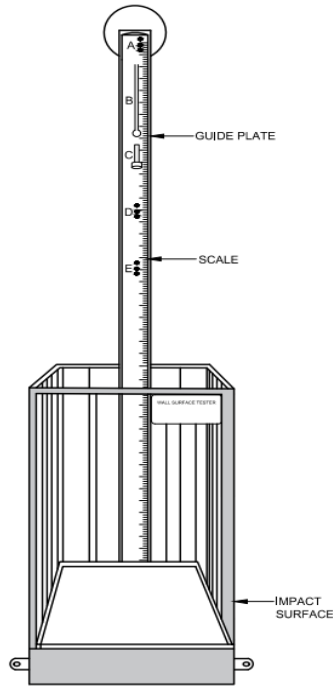


FIG. 1 TYPICAL DIAGRAM USED FOR MEASURING REBOUND OF THE BALL

## A-5 PROCEDURE

**A-5.1** Inflated the ball with the compressed air to a specified pressure as given in **A-3**. The height of the rebound for different type of inflatable ball is determined after the impact of a freely falling ball from a specific drop height as given below:

<i>Ball Type</i>	<i>Drop Height, h</i>
Indoor and Outdoor Football	$200 \pm 1$ cm
Volleyball	$100 \pm 1$ cm
Basketball	$180 \pm 1$ cm

**A-5.2** Set the guide plate in such a way that the lowest point of the ball is at a distance of as mention in above table from the top of the steel plate. Height of the guide plate can be calculated as given below:

$$\text{Height of the guide plate} = (h + D_m) \text{ cm}$$

where

$h$  = Distance between the lowest point of the ball and top of the steel plate; and  
 $D_m$  = Average diameter of the ball.

**B-5.2** Bring the ball in contact with the guide plate and release it.

**B-5.3** Check the rebound height visually. The measurement shall be taken from top of the steel plate and bottom most point of the ball. The rebound height can also be found out by photographic methods.

**B-5.4** Repeat the test 5 time and find the mean value.

**ANNEX B**  
( Clause 6.2 )

**CIRCUMFERENCE AND ROUNDNESS TEST**

**B-1 PRINCIPLE**

Circumference test indicates the dimensions of the ball as an average value based on different axes of measurement. This test is critical to ensure the ball is of correct size. Roundness test analyses the departure of sphericity of balls by measuring their diameters at various randomly selected points on their surface and finding their variation from the average value.

**B-2 TEST CONDITION**

The ambient temperature during testing shall be  $(27 \pm 2)^{\circ}\text{C}$  and humidity of  $(65 \pm 5)$  percent.

**B-3 INFLATING OF BALL**

**B-3.1** A pressure gauge of 1.5 bar<sup>1</sup> with an accuracy of  $\pm 0.01$  bar shall be used for measuring the pressure.

**B-3.2** Different level of outdoor football, water-polo ball, and handball shall be inflated to the following pressure:

- |            |                   |
|------------|-------------------|
| e) Level 1 | $0.8 \pm 0.1$ bar |
| f) Level 2 | $0.8 \pm 0.1$ bar |
| g) Level 3 | $0.5 \pm 0.1$ bar |
| h) Level 4 | $0.5 \pm 0.1$ bar |

**B-3.3** The indoor footballs of all levels shall be inflated to  $0.6 \pm 0.1$  bar.

**B-3.4** Different level of basketball shall be inflated as per **A-3.4**.

**B-3.4** Volleyball of all level shall be inflated to  $0.3 \pm 0.05$  bar.

**B-3.5** Different level of netball, and throwball shall be inflated to the following pressure:

- |            |                   |
|------------|-------------------|
| a) Level 1 | $0.8 \pm 0.1$ bar |
| b) Level 2 | $0.6 \pm 0.1$ bar |
| c) Level 3 | $0.5 \pm 0.1$ bar |

Note — 1 bar =  $10^5$  Pa

**B-4 APPARATUS**

**B-4.1** The diameter and roundness of the ball shall be measured by placing the ball between a horizontal metallic surface (base) and the stem of linear variable differential transfer (LVDT). The distance between the base and bottom of stem gives the diameter of the ball.

**B-4.2** The apparatus shall consist of a metallic frame made up of three rigid flat plates joined together to form a right-angled corner. An arrangement shall be made in such a way that a linear variable differential transfer (LVDT) is attached to the system and shall be able to measure a diameter between 170 mm and 270 mm. The lower face of the stem of LVDT shall have a flat surface of diameter of at least 30 millimetre (*see* Fig. 2). The least count of the measurement shall be 0.01 mm. The LVDT may be combined with ordinary PC and related software package for calculation of circumference.

**B-4.3** The above apparatus can also be used to determine the roundness of the ball by measuring its diameters at various randomly selected points on its surface and finding their mean percentage variations from the average value of ball diameter.

**B-4.4** Alternatively, this measurement can also be carried out with the help of LVDT of 100 mm range using a setting block of  $160 \pm 0.1$  mm height.

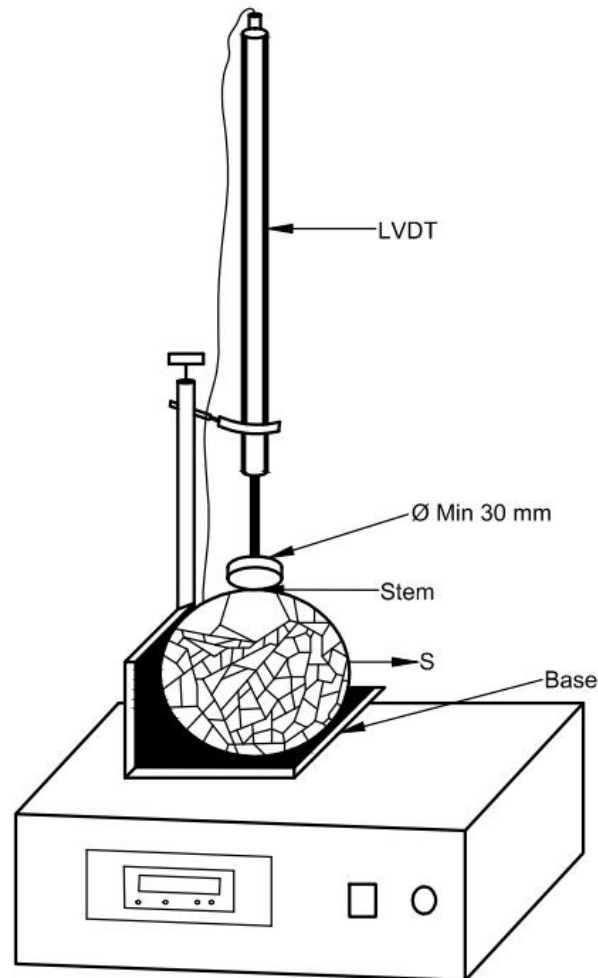


FIG. 2 TYPICAL DIAGRAM OF CIRCUMFERENCE AND ROUNDNESS TESTING MACHINE

## **B-5 PROCEDURE**

**B-5.1** Bring the stem in contact with the base of the setup and set zero point on LVDT. In case a setting block is used, the top surface of setting block will act as a base. The height of setting block shall be added later for calculation of circumference and roundness.

**B-5.2** Inflate the ball to a pressure as specified in **B-3**. Place the ball manually against the metallic walls so it touches both the vertical walls properly. Adjust the position of LVDT in such a way that the stem rests on top of the football. The distance between the base and stem of LVDT gives the diameter of the ball. In case setting block is used, the height of setting block shall be added to LVDT reading to obtain the diameter of the ball.

**B-5.3** Repeat the test 16 times at randomly selected points on the surface of the ball.

## B-6 CALCULATION

**B-6.1** The arithmetic mean of all 16 readings calculated as per **B-5** shall give the diameter of the ball ( $D_m$ ).

$$\text{Mean Diameter, } D_m = \frac{\sum_{i=1}^{i=16} D_i}{16}$$

The circumference of the ball can be calculated using following formula.

$$\text{Circumference, } P_m = \pi \times D_m$$

Calculate absolute deviations of each absorb reading from the average value of diameter, then find the mean absolute deviations using the formula given below:

$$\text{Absolute mean deviation, } \Delta D = \frac{\sum_{i=1}^{i=16} |D_i - D_m|}{16}$$

Calculation of roundness can be done using formula given below:

$$\text{Roundness, Percentage} = \frac{\Delta D}{D_m} \times 100$$

**B-6.2** Circumference and roundness calculation is illustrated in example for 5 readings.

*Example:*

If the readings from calculated as per **B-5** are as follows:

221.03, 219.15, 220.68, 218.95, 218.68

$$\begin{aligned} D_m &= \frac{221.03+219.15+220.68+218.95+218.68}{5} \\ &= 219.70 \end{aligned}$$

$$\begin{aligned} \text{Circumference, } P_m &= \pi \times D_m \\ &= 3.14 \times 219.7 \\ &= 68.98 \text{ cm} \end{aligned}$$

$D_i$	$D_m$	$ D_i - D_m $
221.03	219.70	1.33
219.15	219.70	0.55
220.68	219.70	0.98
218.95	219.70	0.75
218.68	219.70	1.02

$$\begin{aligned} \Delta D &= \frac{1.33+0.55+0.98+0.75+1.02}{5} \\ &= 0.926 \end{aligned}$$

$$\begin{aligned} \text{Roundness, Percentage} &= \frac{\Delta D}{D_m} \times 100 \\ &= \frac{0.926}{219.70} \times 100 \\ &= 0.42 \end{aligned}$$

**ANNEX C**  
( *Clause 6.3* )

**WATER ABSORPTION TEST**

**C-1 PRINCIPLE**

This test is only conducted for outdoor football. When game is played on a wet field or under rain, the surface of the football used in the game absorbs water and its weight increases. Water absorption test used to determine the changes in weight of ball by pressing the ball into water by means of a pneumatic system and left to soak the water. The ball is then weighed again and its final weight is compared to its original weight.

**C-2 TEST CONDITION**

Reproduce to **A-2**.

**C-3 INFLATING OF BALL**

**C-3.1** Different level of outdoor football shall be inflated to the following pressure:

- |            |                   |
|------------|-------------------|
| a) Level 1 | $0.8 \pm 0.1$ bar |
| b) Level 2 | $0.8 \pm 0.1$ bar |
| c) Level 3 | $0.5 \pm 0.1$ bar |
| d) Level 4 | $0.5 \pm 0.1$ bar |

**C-3.2** A pressure gauge of 1.5 bar with an accuracy of  $\pm 0.01$  bar shall be used for measuring the pressure

Note — 1 bar =  $10^5$  Pa

**C-4 APPARATUS**

**C-4.1** The apparatus shall consist of a trough with water in which the football is kept for wetting. A pneumatically operated arrangement shall be made to press down the ball repeatedly at pre-set time interval, to compress the ball to desired depth. An arrangement shall also be provided to support and rotate the ball, when the ball is not being pressed, in order to bring the complete football surface in contact with water during the test.

**C-4.2** The apparatus shall be capable of achieving a compression of 25 percent of football diameter at a frequency of at least 40 compressions per minutes.

**C-4.3** Water trough shall be cylindrical vessel having a diameter of  $(30 \pm 2)$  cm. It shall be filled with  $(2 \pm 0.2)$  cm height of water. The diameter of compression plate shall be  $(16 \pm 1)$  cm. The typical diagram of apparatus used for measuring water absorption of ball is given in Fig. 3.

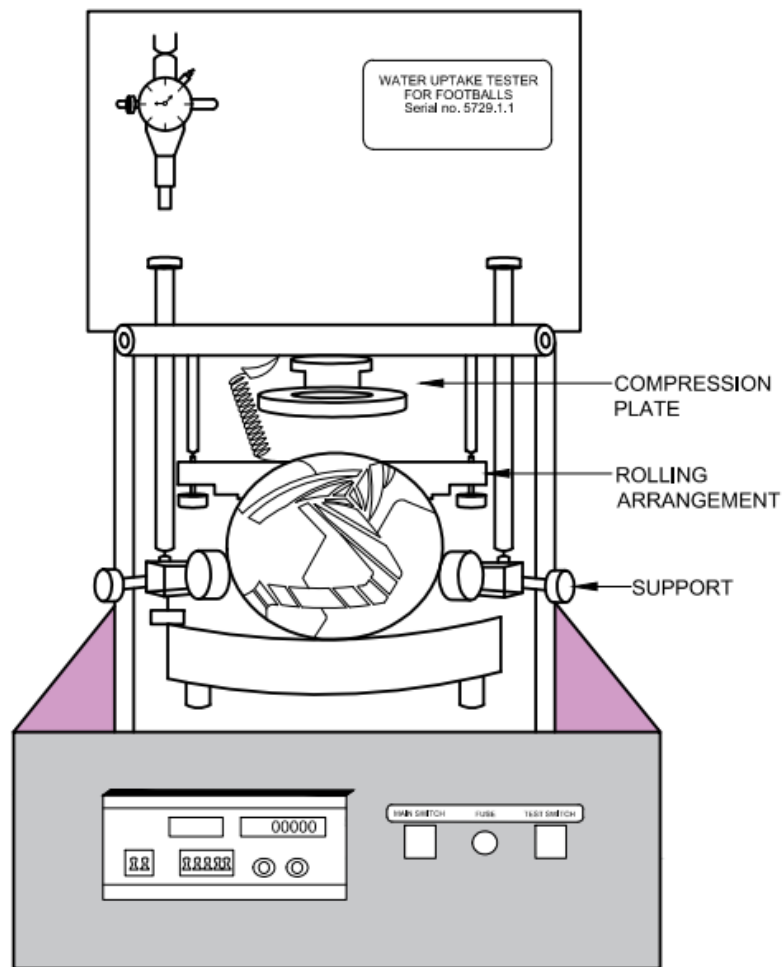


FIG. 3 TYPICAL DIAGRAM USED FOR MEASURING WATER ABSORPTION

### C-5 PROCEDURE

**C-5.1** Inflate the ball to a specified pressure as given in **C-3**. The ball is weighed using electronic balance having an accuracy of 0.1 g. The depth of compression shall be calculated from the mean diameter obtained from the circumference test (25 percent of football diameter).

**C-5.2** Fill the water trough with  $(2 \pm 0.2)$  cm height of water and placed the football at its centre. Adjust the compression plate, support plates and ball rotating arrangements as required.

**C-5.4** A compression equal to 25 percent of the diameter of the ball is applied at 40 compressions per minute. The compression can be measured by finding the difference between the trough base and the compression plate in the end position.

**C-5.5** After 250 compressions the ball shall be remove quickly and wipe dry on the surface using a standard towel. Each ball shall be weighed again using electronic balance after the test.

### C-6 CALCULATION

Calculate the water uptake of the ball using the following formula:



$$\text{water absorption (percentage)} = \frac{(w_f - w_i)}{w_i} \times 100$$

where

$w_i$  = Weight of the ball before the test; and

$w_f$  = Weight of the ball after the test.