भारतीय मानक Indian Standard

IS 5920 (Part 6) : 2024 ISO 10110-9 : 2016

प्रकाशिकी और फोटोनिक्स — प्रकाशीय तत्वों और प्रणालियों के लिए आरेखण तैयार करना भाग 6 सतही उपचार और कोटिंग

Optics and Photonics — Preparation of Drawings for Optical Elements and Systems Part 6 Surface Treatment and Coating

ICS 01.100.20; 37.020

© BIS 2024 © ISO 2016

मानक पश्चमदर्शकः

भारतीय मानक ब्यूरो BUREAU OF INDIAN STANDARDS मानक भवन, 9 बहादुर शाह ज़फर मार्ग, नई दिल्ली - 110002 MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG NEW DELHI - 110002 www.bis.gov.in www.standardsbis.in

September 2024

Price Group 7

NATIONAL FOREWORD

This Indian Standard (Part 6) which is identical to ISO 10110-9 : 2017 'Optics and photonics — Preparation of drawings for optical elements and systems — Part 9: Surface treatment and coating' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendation of the Optics and Photonics Sectional Committee and approval of the Production and General Engineering Division Council.

This standard specifies the presentation of design and functional requirements for optical elements and systems in technical drawings used for manufacturing and inspection. It also specifies rules for indicating the treatments and coatings applied to optical surfaces for functional and protective purposes.

IS 5920 (Part 1) supersedes the first published Indian Standard IS 5920 : 1970 'Recommendation for the preparation of drawing for optical elements and system'.

This standard has been published in thirteen parts. The other parts in this series are:

Part 1	General
Part 2	Surface form tolerances
Part 3	Centring tolerances
Part 4	Surface imperfections
Part 5	Surface texture
Part 7	Non-toleranced data
Part 8	Aspheric surfaces
Part 9	Wavefront deformation tolerance
Part 10	Diffractive surfaces
Part 11	Laser irradiation damage threshold
Part 12	Stress birefringence, bubbles and inclusions, homogeneity, and striae
Part 13	General description of surfaces and components

The text of ISO standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are however not identical to those used in Indian Standards. Attention is particularly drawn to the following

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'; and
- b) Comma (,) has been used as a decimal marker while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

Contents

Page

1	Scope		
2	Normative references		
3	Terms and definitions	1	
4	General		
5	Indications in drawings5.1General5.2Indication of functional coatings5.3Indication of protective treatments	2 2 2 3	
6	Imperfections of functional coatings		
7	Examples		
Annex	A (informative) Functional coatings (from ISO 9211-1:2010)	5	
Annex	B (informative) Example for an optical drawing using the indication of functional coatings in tabular form	6	
Annex	c C (informative) Example for a coating specification document	7	
Annex	x D (informative) Example of a functional coating indication showing two different coatings on the same surface	8	
Biblio	graphy	9	

this Page has been intertionally left blank

Indian Standard

OPTICS AND PHOTONICS — PREPARATION OF DRAWINGS FOR OPTICAL ELEMENTS AND SYSTEMS

PART 6 SURFACE TREATMENT AND COATING

1 Scope

ISO 10110 specifies the presentation of design and functional requirements for optical elements and systems in technical drawings used for manufacturing and inspection.

This part of ISO 10110 specifies rules for indicating the treatments and coatings applied to optical surfaces for functional and/or protective purposes.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 128-24, Technical drawings — General principles of presentation — Part 24: Lines on mechanical engineering drawings

ISO 9211-1:2010, Optics and photonics — Optical coatings — Part 1: Definitions

ISO 9211-2, Optics and photonics — Optical coatings — Part 2: Optical properties

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9211-1 and the following apply.

3.1

functional coating

thin film deposited to affect surface reflectance, to separate spectral wavelength regions, and/or to produce certain polarization or other special properties

Note 1 to entry: There is a wide variety of functional coatings, e.g. reflective, antireflective, wavelength selective, conductive or protective coatings. The different types of functional coatings are listed in ISO 9211-1:2010, Table A.1 (see <u>Annex A</u>).

3.2

protective surface treatment

paint or plating protection applied to optical surfaces, particularly rear surface mirrors, to prevent damage from handling, environmental effects and other causes

Note 1 to entry: Surfaces may also be painted or covered in certain areas to limit their optically effective apertures for stray light control.

4 General

ISO 10110-1 stipulates that all indications apply fundamentally to the finished product. Accordingly, the dimensions given in drawings which mention surface treatments or coatings refer to the dimensions after application of the treatments or coatings (see <u>Figure 1</u>). However, in certain cases, the dimensions

IS 5920 (Part 6) : 2024 ISO 10110-9 : 2016

of a part before the application of surface treatments might be important. In such cases, it shall be explicitly indicated in the drawing that these dimensions refer to the untreated part.

5 Indications in drawings

5.1 General

The form of the specification for coatings is defined in ISO 9211-2.

When coating performance requirements are complex, they are described in separate specification documents, which shall be referenced in the drawings. If the specification is simple, it may be given directly on the drawing. In this case, the following symbols shall be used according to ISO 9211-1:

- $\tau(\lambda)$ for spectral transmittance;
- $\rho(\lambda)$ for spectral reflectance;
- $\alpha(\lambda)$ for spectral absorptance.

NOTE Wherever the Greek letters are mistakable, $T(\lambda)$, $R(\lambda)$ and $A(\lambda)$ can be used.

Wavelengths shall be given in nanometers.

5.2 Indication of functional coatings

For a suitable optical element, especially a lens element or a prism, the data may be given in tabular form as described in ISO 10110-1. The preferred field for the indication of functional coatings is the table field. An example is shown in <u>Annex B</u>.

If the specification of a coating is too long to be included in the appropriate table field, it shall be given in the drawing field in a box as described below or in a separate coating specification document. An example is shown in <u>Annex C</u>.

Functional coatings shall be indicated by (\land) . If functional coatings are specified in the table field, this symbol shall be located at the beginning of the specification. When functional coatings are specified in the drawing field, this symbol shall be located outside the element and tangent to the surface to be coated. Exceptions are elements in which the coating is protected by a protective layer and cemented (or optically contacted) subassemblies; in these cases, the coating symbol shall be placed inside the optical element (see Figure 2 and Figure 3).

In drawings of a subassembly, the position of the coating symbol, $(\ref{eq:symbol})$, indicates to which of the two joined surfaces the coating is to be deposited: the coating symbol is placed inside the optical element that is to be coated prior to assembly (see Figure 3).

The coating symbol shall have a leader line to a box, containing the specification reference or specification.

Examples are given in Figures 2 to 5.

The function of the coating shall be included in the box. Unless otherwise noted, the specifications shall refer to the indicated surface alone. In the case of functional coatings that are to be cemented, it shall be indicated whether the specification applies before or after cementing (see Figure 3).

Unless indicated otherwise, the coating shall extend at least over the optically effective surface. If necessary, toleranced dimensions shall be given for the area to be coated. In cases in which different zones of the same surface are to be coated differently, the zones shall be indicated by dimensioning (see <u>Annex D</u>).

5.3 Indication of protective treatments

Surface treatment such as protective treatments shall be indicated by a thick "chain" line (line type 04.2, ISO 128-24) adjacent to the surface. The length of this line indicates the region to be treated. If necessary, dimensions shall be given for this region.

The specification of the surface treatment shall be given in a box, which is connected to the thick "chain" line by a leader. Examples are given in Figures 1 and $\underline{2}$.

6 Imperfections of functional coatings

ISO 10110-7 specifies the indication of an acceptability level for coating imperfections, which are described in ISO 9211-1.

7 Examples

Examples of functional coating and protective surface treatment indications are given in <u>Figures 1</u> to <u>5</u>.




Figure 1 — Example of protective surface treatment indication (the outer diameter of 48 mm ± 0,05 mm refers to the part after painting)




Figure 2 — Example of indication of a protective surface treatment combined with a functional coating

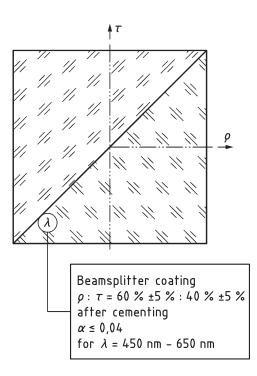


Figure 3 — Example of functional coating indication with optical characteristic specification




Figure 4 — Example of functional coating indication referencing separate specification




Figure 5 — Example of functional coating indication with specification of material

Annex A (informative)


Functional coatings (from ISO 9211-1:2010)

Principal function	Code designation	Definition	Example of application
Reflecting	RE	Coating increasing the reflectance of an optical surface over a specified wavelength range.	Laser mirror
Antireflecting	AR	Coating reducing the reflectance of an optical surface over a specified wavelength range and usually increasing the transmittance.	AR coated lens
Beam splitting	BS	Coating separating the incident flux into two beams, one transmitted and the other reflected, the energy distribution	
		of each beam reproducing the incident energy distribution in essentially a non-selective manner, over a specified wavelength range.	Partial reflector
Attenuating	AT	Coating reducing the transmittance in essentially a non-se- lective manner over a specified wavelength range.	Neutral density filter
Filtering a) Bandpass	FI FI-BP FI-BR	Coating modifying the transmittance in a selective manner over a specified wavelength range.	Laser line selec- tion filter
b) Band rejection			Raman notch filter
Selecting or com-	SC-LP SS SC-SP	Coating dividing the incident radiation flux into two or more beams each one covering a limited spectral region and being propagated either by reflection or by transmission. The reverse path combines beams of different spectral regions.	Dichroic mirror
bining a) Long pass			Beam combiner
b) Short pass			Cold light mirror
			NIR cut filter
Polarizing	РО		Polarizer
	electromagnetic radiation, over a specified wavelength range		Non-polarizing beamsplitter
Phase changing	PC	Coating controlling the phase change of the emergent elec- tromagnetic radiation relative to the incident radiation, and/or the phase difference between s and p vectors, over a specified wavelength range.	Phase retarder
Absorbing	AB	Coating absorbing a specified value of the incident flux over	Light trap
		a specified wavelength range.	UV absorber
Supplementary	SU	Coating providing a non-optical property; this function is often combined with an optical function.	Electrical con- ductivity
			Chemical or mechanical pro- tection

Table A.1 — Functional coatings (from ISO 9211-1:2010)

Annex B (informative)

Example for an optical drawing using the indication of functional coatings in tabular form

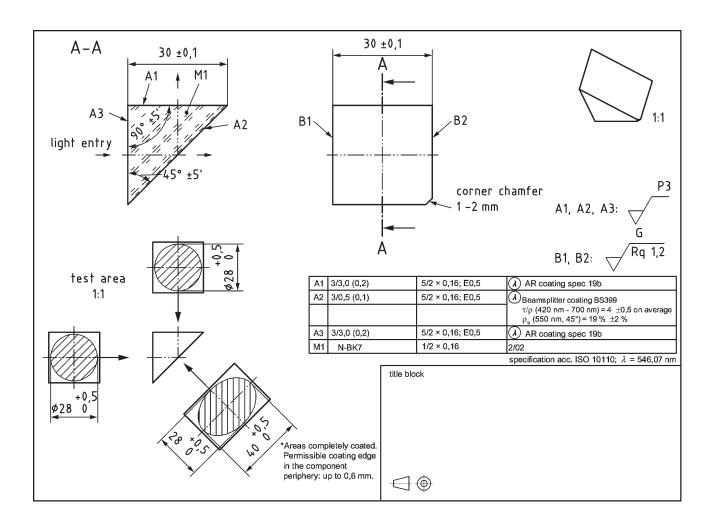


Annex C (informative)

Example for a coating specification document

Specification		765432-0001-000/98
Specifications: Optical Coating Broadband Antireflective Coating for NUV and VIS Comment: $\rho_u = (\rho_s + \rho_p)/2$ $\rho = reflectance$ Index s: perpendicular polarized $p: parallel polarized$ $u:$ unpolarized		$\label{eq:constraint} \begin{array}{c} \hline Transmittance \mbox{ and Reflectance range:} \\ \hline \mbox{Angle of incidence: } 0^\circ - 15^\circ \\ \hline \mbox{ρ_u}(300\mmbox{ nm} - 350\mmmbox{ nm}) < 0,8 \ \% \ \rightarrow 0,4 \ \% \ \rho_u$(360\mmmbox{ nm} - 600\mmmmbox{ nm}) < 0,8 \ \% \ \rightarrow 0,4 \ \% \ \rho_u$(360\mmmmbox{ nm} - 610\mmmmbox{ nm}) < 0,8 \ \% \ \rightarrow 0,6 \ \% \ \rho_u$(510\mmmmmbox{ nm} - 750\mmmmbox{ nm}) < 0,6 \ \% \ \rightarrow 0,9 \ \% \ \rho_u$(750\mmmmmmmmbox{ nm} - 760\mmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmmm$
		Allowed reflectance range in grey color
Solubility, short-time resistance to:	water, mild bases cleaners	and acids, alcohol, acetone and alcoholic solvents, glass
Resistance to humidity:		55 °C, 93 % relative humidity, 16 hours
Resistance of coating:	ISO 9211-4-01-03 ISO 9211-4-02-01 ISO 9211-4-04-07	(Abrasion) (Adhesion)
Specification of spectral properties in accor Specification of dimensions and tolerances components in accordance with ISO 10110	of optical compone	1-2 (07/01) nts and compilation of drawings and specifications of optical
title block		

Annex D (informative)

Example of a functional coating indication showing two different coatings on the same surface

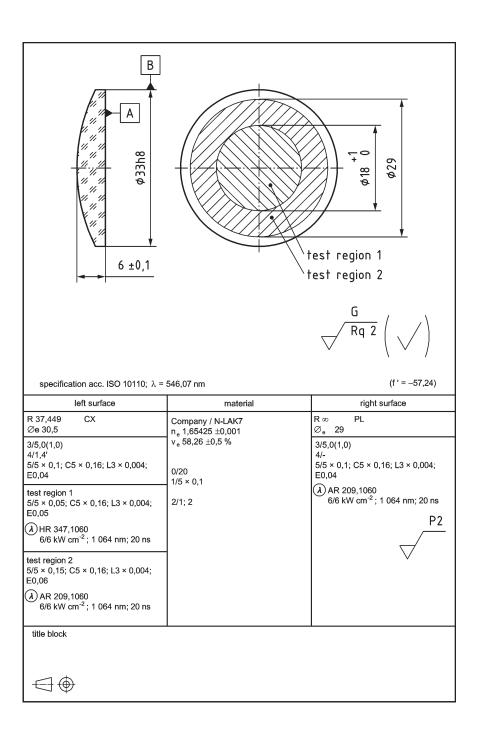

Bibliography

- [1] ISO 7944, Optics and optical instruments Reference wavelengths
- [2] ISO 9211-3, Optics and photonics Optical coatings Part 3: Environmental durability
- [3] ISO 9211-4, Optics and photonics Optical coatings Part 4: Specific test methods
- [4] ISO 10110-1, Optics and photonics Preparation of drawings for optical elements and systems Part 1: General
- [5] ISO 10110-7, Optics and photonics Preparation of drawings for optical elements and systems Part 7: Surface imperfection tolerances

this Page has been intertionally left blank

In this adopted standard, references appear to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards, which are to be substituted in their respective places, are listed below along with their degrees of equivalence for the editions indicated

International Standard	Corresponding Indian Standard	Degree of Equivalence
ISO 128-24 Technical drawings — General principles of presentation — Part 24: Lines on mechanical engineering drawings	IS 10714 (Part 2) : 2023/ISO 128-2 : 2022 Technical product documentation (TPD) — General principles of representation: Part 2 Basic conventions for lines	Identical
ISO 9211-1 : 2010 Optics and photonics — Optical coatings — Part 1: Definitions	IS 16506 (Part 1) : 2016/ISO 9211-1 : 2010 Optics and photonics — Optical coatings: Part 1 Definitions	Identical
ISO 9211-2 Optics and photonics — Optical coatings — Part 2: Optical properties	IS 16506 (Part 2) : 2021/ISO 9211-2 : 2010 Optics and photonics —Optical coatings: Part 2 Optical properties	Identical

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act*, 2016 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

Headquarters:

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Head (Publication & Sales), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the website-www.bis.gov.in or www.standardsbis.in.

This Indian Standard has been developed from Doc No.: PGD 39 (23506).

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

-		
Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002Telephones: 2323 0131, 2323 3375, 2323 9402Website: www.bis.gov.in		
Regional Offices:		Telephones
Central : 601/A, Konnectus Tower -1, 6 th Floor, DMRC Building, Bhavbhuti Marg, New Delhi 110002		<i>Telephones</i> { 2323 7617
Eastern : 8 th Floor, Plot No 7/7 & 7/8, CP Block, Sector V, Salt Lake, Kolkata, West Bengal 700091		<pre>{ 2367 0012 2320 9474 { 265 9930</pre>
Northern : Plot No. 4-A, Sector 27-B, Madhya Marg, Chandigarh 160019		265 9930
Southern : C.I.T. Campus, IV Cross Road, Taramani, Chennai 6001	13	{ 2254 1442 2254 1216
Western : Manakalya, 5 th Floor/MTNL CETTM, Technology Street Mumbai 400076	, Hiranandani Gardens, Powai	{ 25700030 25702715

Branches : AHMEDABAD, BENGALURU, BHOPAL, BHUBANESHWAR, CHANDIGARH, CHENNAI, COIMBATORE, DEHRADUN, DELHI, FARIDABAD, GHAZIABAD, GUWAHATI, HARYANA (CHANDIGARH), HUBLI, HYDERABAD, JAIPUR, JAMMU, JAMSHEDPUR, KOCHI, KOLKATA, LUCKNOW, MADURAI, MUMBAI, NAGPUR, NOIDA, PARWANOO, PATNA, PUNE, RAIPUR, RAJKOT, SURAT, VIJAYAWADA.